



# Low loss sharp photonic crystal waveguide bends



Qiang Zhao, Kaiyu Cui\*, Xue Feng, Fang Liu, Wei Zhang, Yidong Huang

Department of Electronic Engineering, Tsinghua National Laboratory for Information Science and Technology, Tsinghua University, Beijing 100084, China

## ARTICLE INFO

### Article history:

Received 8 April 2015

Accepted 2 June 2015

Available online 17 June 2015

### Keywords:

Photonic crystal waveguide

Bending loss

Slow mode

## ABSTRACT

In this paper we study slot structures in the 120° photonic crystal waveguide (PCW) bends. We find that the transmission characteristics of the slotted PCW bend can be simply predicted by analyzing the corresponding straight PCW. According to our mode analysis for straight PCW, the slot structure blue shifts the stopband of the fundamental mode, while enhances the light confinement at slot side. The experiment shows good agreements with the simulation. Furthermore, a low bending loss in broad bandwidth has been obtained in the capsule-shaped slot PCW bend, which is very useful for broadband application.

© 2015 Elsevier B.V. All rights reserved.

## 1. Introduction

Photonic crystal based device has been considered as one of the potential building blocks in photonic integrated circuit (PIC) for versatile applications [1]. Through photonic band gap (PBG) and slow light effect [2], various optical devices based on photonic crystals have been demonstrated with ultra-small footprints, such as waveguides [3], resonators [4], filters [5] and bends [6]. Among them, high efficient photonic crystal waveguide (PCW) bend can be achieved with the spatial extent on the order of the wavelength, which is a promising candidate for compact PICs [7–9].

In straight PCWs, guided modes perform less loss, as they are well confined by the PBG. For PCW bends, bending loss is introduced due to the discrete periodic structure. Hence structure modification should be adopted to reduce bending loss in a wide band. However, directly matching the dispersion relationship of the PCW bends with straight PCWs seems tough due to the non-periodical structure at the bending corner [10]. Thus extensive researches have been carried out to reduce the bending loss by means of resonance matching [6], impedance matching [11] and topology optimization [12–14]. Despite all this, treating the bend as a cavity or using impedance-matching can only explain the result of a single wavelength [13]. Moreover, most of these researches are based on complicated and precise structure designs, which are challenging for fabrication. To our knowledge, although the bending loss of 60° PCW bend has been reduced to as low as 0.05 dB/bend by Assefa, et al. [15], the bending loss of 120° PCW bend, which is much sharper, is still larger than 2 dB/bend in experiment [10]. Another way is adding slot structure at bending

area to enhance the light confinement. Recently, Zhang, et al. theoretically obtained a 120° PCW bend with more than 90% transmission over 74 nm bandwidth with arc-shaped slots [16]; Chen, et al. achieved PCW bend with 2.81 dB bending loss at 1550 nm with capsule-shaped slots [10]. These two reported that PCW bends are both optimized with slot structures, which bring a new way to design the broadband and low loss PCW bends simply. However, the reported works for PCW bends mainly focus on the transmission and reflection, lacking of mode analysis.

In this paper, we use mode analysis to study the effect that the slot acting in the PCW bends. We measured the transmission spectra of the slotted PCW bends in SOI platform. A wide low bending loss has been obtained in the slotted PCW bend, which are useful for broadband application. The experiment result shows good agreements with simulation.


## 2. Detailed analysis and results

Introducing slot structures in PCW bends may have two effects: affecting the coupling between straight PCW and PCW bend, and radiation loss at the bending area. The radiation loss is masked with mode leakage, bandgap and other factors in transmission spectra, which is difficult to be individually extracted. On the other hand, the influence to coupling can be analyzed by studying the difference of mode profiles between original and slotted straight W1 PCW. Fig. 1(a) and (b) shows the schematic of the original and slotted W1 PCW, respectively. The slot in Fig. 1(b) replaces the inner holes at one side, and the slot width is the same as the hole diameter ( $2r$ ). The dashed boxes present the supercells of the two PCWs.

We use three-dimensional (3D) PWE method to calculate the dispersion curves of the two PCWs in transverse electric (TE)

\* Corresponding author. Fax: +86 10 62797073 807.


E-mail address: [kaiyucui@tsinghua.edu.cn](mailto:kaiyucui@tsinghua.edu.cn) (K. Cui).

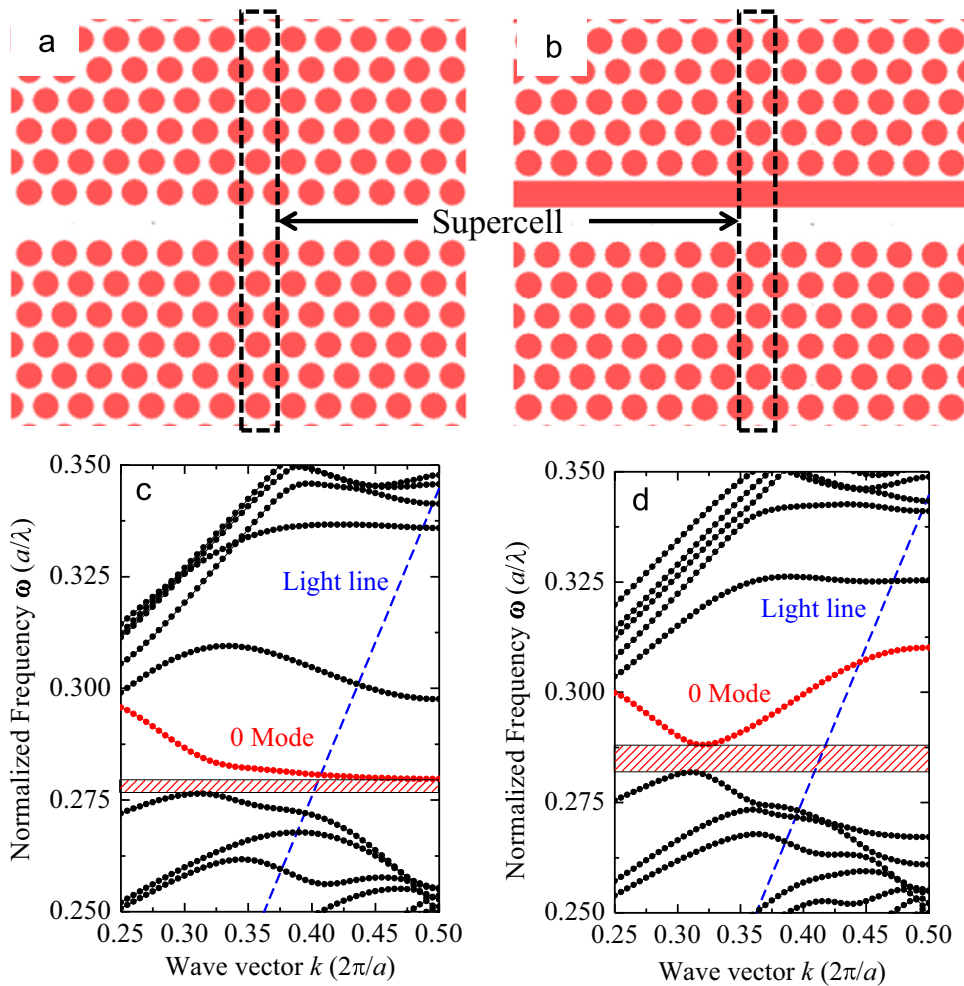

**Fig. 1.** Schematic of the (a) original and (b) slotted W1 PCW; (c) calculated dispersion curves of the original and (d) slotted W1 PCW. The dashed boxes present the supercells of the two PCWs. (For interpretation of the references to color in the text, the reader is referred to the web version of this article).

polarization. In simulation, we used a SOI platform with 220-nm-thick silicon (Si) slab and infinite oxide cladding [17]. The parameters are taken as following: the refractive index for Si slab  $n_{\text{Si}}=3.43$ , the refractive index for oxide cladding layer  $n_{\text{clad}}=1.45$ , the lattice constant  $a=440$  nm, and the hole radius  $r=160$  nm. Fig. 1(c) and (d) presents the dispersion curves of the original and slotted W1 PCW, respectively. It can be observed that the fundamental defect mode of W1 (plotted as red dot curves) located mainly above the light line (plotted as blue dashed curves) in oxide-silicon-oxide structure. The slots increase the ratio of the low index region, which reduces the effective index of the PCW. Thus blue shift occurs for the dispersion curves as well as the bandgap. As a result, the PCW with single side slot will stop at a shorter wavelength than that of the original W1 PCW.

The slot structure also affects the intensity of the defect modes.

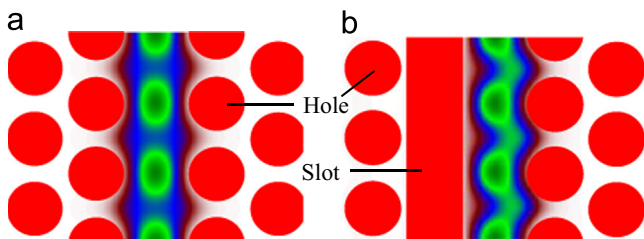

**Fig. 2.** Mode fields of the fundamental mode in (a) original and (b) slotted W1 PCW.

Fig. 2(a) and (b) shows the calculated mode fields of the fundamental mode in original and slotted W1 PCWs, respectively. The slot pushes the mode field to the opposite side, which indicates that the slot structure enhances the light confinement along the line-defect.

For the slot structures in PCW bend, directly calculating the dispersion curves of the bending area seems tough, because no periodical structure can be found at the bending corner [16]. Hence we analyze the slotted PCW bends via straight PCW. Fig. 3 (a) and (b) shows an arc-shaped slotted PCW bend [16] and a corresponding straight PCW with finite slot. Fig. 3(c) gives calculated results on the transmission spectra of the original W1 PCW, original PCW bend, straight PCW with finite slot and arc-shaped slotted PCW bend.

The FDTD simulation shows that the slotted PCWs, no matter straight or bend, stop at a shorter wavelength than the corresponding original PCW. Such phenomenon conforms well to the hereinbefore described blue shifted bandgap of the infinite slotted PCW. The FDTD simulation also presents that the slotted PCW bend performs lower bending loss than the original PCW bend before 1400 nm, although a dip appears around 1450 nm. The low bending loss accords well with the enhanced light confinement by the slot. Considering there is no such dip in the transmission spectrum of the straight PCW with finite slot, it can be concluded that the dip is not induced from the coupling.

In experiment, we fabricated the original PCW bends and two shapes of slotted as PCW bends as presented in Ref. [16] and [10].

Download English Version:

<https://daneshyari.com/en/article/1533580>

Download Persian Version:

<https://daneshyari.com/article/1533580>

[Daneshyari.com](https://daneshyari.com)