

Enhanced microwave absorption of $\text{La}_{0.7}\text{Sr}_{0.3}\text{MnO}_{3-\delta}$ based composites with added carbon black

Chien-Yie Tsay^{a,*}, Yao-Hui Huang^a, Dung-Shing Hung^b

^aDepartment of Materials Science and Engineering, Feng Chia University, Taichung 407, Taiwan

^bDepartment of Information and Telecommunications Engineering, Ming Chuan University, Taipei 111, Taiwan

Received 16 July 2013; received in revised form 7 August 2013; accepted 8 August 2013

Available online 22 August 2013

Abstract

Composites consisting of carbon black (CB) particles, $\text{La}_{0.7}\text{Sr}_{0.3}\text{MnO}_{3-\delta}$ (LSMO) powder, and epoxy resin were prepared for development of a high performance microwave absorber. This study investigated the influence of adding amounts of LSMO powder (60, 70, and 80 wt%) on complex permittivity, complex permeability, and reflection loss for CB (5 wt%)-epoxy composites. The variation of complex permittivity and complex permeability with frequency of the composites was measured by the cavity perturbation technique in the range of 7–14 GHz. It was found that the real part of the complex permittivity increased with increasing LSMO addition and the imaginary part of the complex permeability decreased with increasing frequency. The microwave absorption results indicated that the composite filled with 5 wt% CB particles and 80 wt% LSMO powder had the best absorption performance. The maximum reflection loss was -23.63 dB at 7.87 GHz and the absorbing bandwidth at -10 dB was 1.75 GHz with a matching thickness of 5 mm.

© 2013 Elsevier Ltd and Techna Group S.r.l. All rights reserved.

Keywords: A. Powders: solid state reaction; B. Composites; C. Magnetic properties; D. Perovskites; E. Functional applications

1. Introduction

Electromagnetic (EM) waves in the GHz range are increasingly utilized in wireless telecommunication systems (such as mobile phones, laptops, tablets, and local area networks), radar systems, and satellite broadcast systems [1]. Unfortunately, severe electromagnetic interference (EMI) problems accompany the extensive use of electronic devices and components, and information security during the operation of local area networks and personal digital assistants is always a concern. To overcome the EMI pollution problem, the study and development of microwave absorbing materials has attracted much interest in recent years [2].

Perovskite-structured manganese oxides $\text{R}_{1-x}\text{A}_x\text{MnO}_3$ (R: trivalent rare earth element; A: divalent alkaline earth element) are extensively studied because of their colossal magnetoresistance effect and the ordering of spin, charge, and orbitals [3]. Among these manganese oxides, those in the $\text{La}_{1-x}(\text{Ca}, \text{Sr},$

$\text{Ba})_x\text{MnO}_3$ system, in particular $\text{La}_{1-x}\text{Sr}_x\text{MnO}_{3\pm\delta}$ (LSMO), exhibit a strong magnetism and low resistivity at room temperature, characteristics that make them promising candidates for application as microwave absorbing materials [3,4]. Carbon black (CB), on the other hand, is used as the conductive filler in composites for EMI shielding and EM wave absorption applications, due to its electrical conductivity, chemical resistance, low density, and reasonable cost [2,5]. Both LSMO and CB have been used as filler in microwave absorbers and exhibited good absorption in a high frequency range, such as the X-band frequency range [4,5].

In a microwave absorber, the excellent microwave absorption property is attributed to good wave impedance matching, which enhances dielectric loss and/or magnetic loss [2]. Therefore, complex absorbers that include both dielectric loss and magnetic loss fillers may offer high reflection-loss and wide frequency-range microwave absorption. In this study, we prepared a hybrid type microwave absorbing composite. It was a mixture of CB particles for dielectric loss and LSMO powder for magnetic loss. The goals of this study were to produce a high performance X-band microwave absorber and to investigate the influence of LSMO filler changes (varied from 60

*Corresponding author. Tel.: +886 4 24517250x5312; fax: +886 4 24510014.
E-mail address: cytsay@fcu.edu.tw (C.-Y. Tsay).

to 80 wt%) on the electromagnetic parameters (permittivity and permeability) and reflection loss of CB/LSMO composites.

2. Experimental

$\text{La}_{0.7}\text{Sr}_{0.3}\text{MnO}_{3-\delta}$ (LSMO) powder was synthesized by the conventional mixed-oxide process. High-purity La_2O_3 , SrCO_3 , and Mn_2O_3 powders were used as the raw materials. The raw materials were weighed, mixed, ground, and then calcined at a temperature of 1100 °C for 8 h to form crystalline LSMO powder. The nano-sized carbon black (CB, Vulcan XC-72) particles were obtained from Cabot Corporation (USA). The composite samples for measuring complex permittivity and permeability were prepared by dispersing the CB particles and LSMO powder in epoxy resin. The epoxy resin (CMA1-K02, Pentad Scientific Corporation, Taiwan) was formed by mixing 98 wt% resin and 2 wt% hardener. The mixing ratio of CB particles to epoxy was maintained at 5 wt% and the LSMO powder was varied at 60, 70, and 80 wt%. The cylinder sample for measuring the electromagnetic parameters was 2 mm in diameter and 3 mm in length.

The crystal structure of calcined LSMO powder was examined using an X-ray diffractometer (XRD, Bruker D8 SSS) with Cu K α radiation. The morphology of the LSMO powder was observed by scanning electron microscope (SEM, Hitachi S-4800), and the element composition of powder sample was verified by energy dispersive X-ray spectrometry (EDS). The average particle size of LSMO powder was decided by the mean linear intercept, which was determined from SEM micrograph. Magnetization–magnetic field (M – H) hysteresis loop measurement was performed with a vibrating sample magnetometer (VSM, Lake Shore 7003) at a frequency of 60 Hz.

The complex permittivity and complex permeability of the composites were measured by the cavity perturbation technique using an Agilent N5230A (PNA-L) Vector Network Analyzer in frequency ranges of 7.0–12.4 GHz for permittivity measurements and 7.5–13.8 GHz for permeability measurements. The calculated equations are presented in detail in our previous study [6]. The X-band rectangular resonant cavity is constructed with a WR 284 aluminum waveguide with dimensions of 100 mm in length, 22 mm in width, and 10 mm in height (Fig. 1). According to the results of reflection loss with frequency of composites, we can evaluate their microwave absorption capabilities.

3. Results and discussion

Fig. 2 shows the X-ray diffraction (XRD) pattern of the calcined $\text{La}_{0.7}\text{Sr}_{0.3}\text{MnO}_{3-\delta}$ (LSMO) powder. All the detected diffraction peaks were indexed satisfactorily on the basis of a rhombohedral cell [$R\bar{3}c$ (167)] of $\text{La}_{0.7}\text{Sr}_{0.3}\text{MnO}_3$ (JCPDS no. 89-8098) [7]. The XRD result clearly indicates that the as-prepared LSMO powder exhibited the pure rhombohedral perovskite phase. The inset of Fig. 2 presents the plot of the magnetic hysteresis loop of LSMO powder measured at room temperature. That hysteresis loop shows the typical



Fig. 1. Photograph of an X-band rectangular resonant cavity for measurement of complex permittivity and permeability of microwave absorbing composites.

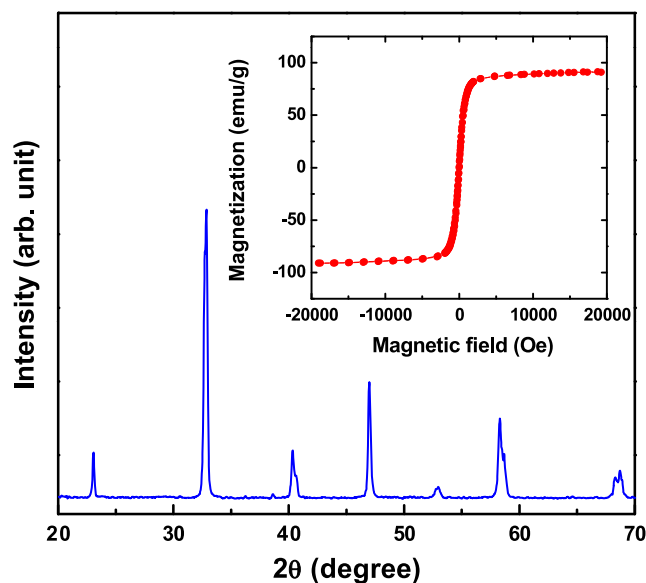


Fig. 2. XRD pattern of calcined $\text{La}_{0.7}\text{Sr}_{0.3}\text{MnO}_{3-\delta}$ (LSMO) powder. The inset is a plot of magnetization versus magnetic field for LSMO powder.

feature of soft magnetic materials, with minimal hysteresis. The saturation magnetization and coercivity of calcined LSMO powder were about 91.0 emu/g and 15 Oe. Bayrakdar posited that soft magnetic materials achieving a saturation magnetization higher than 80 emu/g could be used for EMI and absorbing materials [1].

The morphology of calcined LSMO powder is shown in Fig. 3(a); visible is a slightly reactive aggregated powder with an average particle size of about 1.5 μm . Fig. 3(b) displays the EDS spectrum of the LSMO powder; visible are La, Sr, Mn, and O peaks, without any impurities. The amounts in at% of the elements La, Sr, Mn, and O were found to be 16.02, 6.74, 21.67, and 55.43, respectively. It was worth noting that the concentration of O was significantly deficient as compared with the stoichiometry of the nominal chemical composition $\text{La}_{0.7}\text{Sr}_{0.3}\text{MnO}_3$. Chueh et al. reported that the oxygen deficiency could destroy and reduce magnetic properties [8].

The cavity perturbation technique is widely adopted for measurements of complex permittivity ($\epsilon_r = \epsilon' + j\epsilon''$) of microwave dielectric materials [9] and complex permeability ($\mu_r = \mu' + j\mu''$) of microwave magnetic materials [10]. That

Download English Version:

<https://daneshyari.com/en/article/1461409>

Download Persian Version:

<https://daneshyari.com/article/1461409>

[Daneshyari.com](https://daneshyari.com)