

Key technologies implementation of high-repetition-rate satellite laser ranging

Wang Peiyuan¹, Guo Tangyong¹, Gao Hao², Li Xin¹, Zhu Wei¹, Zou Tong¹ and Li Shipeng¹

¹Key Laboratory of Earthquake Geodesy, Institute of Seismology, China Earthquake Administration, Wuhan 430071, China

²Beijing Satellite Navigation Center, Beijing 100094, China

Abstract: Satellite laser ranging (SLR) is one of the major space geodetic instruments, which has various applications in earth science. In this paper, we introduce several issues regarding the key technology implementation of high-repetition-rate SLR system. Compared with traditional technology, using kHz and 8ps pulse width laser component, the data quantity and quality of high-repetition-rate satellite laser ranging (SLR) can be significantly improved. The characteristics of high-repetition-rate laser ranging and the key technologies are presented, including the event timer with the precision of picosecond, the generation of range gate signal, and so on. All of them are based on the Field Programmable Gate Arrays (FPGA) and tested on China mobile SLR system-TROS1000. Finally, the observations of satellite Beacon-C are given.

Key words: high repetition rate; event timer; range gate; field programmable gate arrays; Satellite Laser Ranging (SLR)

1 Introduction

In Satellite Laser Ranging (SLR) system, the distance between satellite and observation station can be measured by recording the round flight time of laser pulse. For the traditional lower-repetition-rate (10 – 20Hz) SLR, there is only one pulse flying between the satellite and ground station. Therefore, the observation is extremely limited, and the ranging precision would be affected seriously by the width of laser pulse, usually at several centimeters. With the development of the semiconductor Diode-pumped Mode-locked Laser techniques, a new type laser with the repetition rate of kHz and the pulse width of about 8 ps has been implemented. Using this kind of laser component, the quantity and quality of observations will be increased significantly.

More than one laser pulse would exist simultaneously and interfere with each other, hence, it will be big issue to distinguish and pair different start and stop pulses, range gate controller and time measurement during the process of the pulse flight^[1-3]. In this paper, some key technologies will be addressed to solve these problems, including range gate controller and high repetition rate event timer, and then the observational results will also be demonstrated.

2 Implementation of key technologies

The timing sequence of high-repetition-rate SLR is shown in figure 1. A laser pulse is transmitted at the n moment, and returns at the n' moment, while before the n' moment, $N - 1$ laser pulses have been received^[4]. Using the traditional time interval counter, it is impossible to identify the return pulse corresponding to the transmitted pulse. So it is necessary to design a new equipment to count the round trip flight time of laser pulse.

Received:2012-11-28; Accepted:2012-12-26

Corresponding author: Wang Peiyuan, E-mail: wpystr@163.com

This work is supported by the National Natural Science Foundation of China (40774013)

2.1 Event timer based on time-to-digital conversion chip

Event timer is a new time counting device, and the laser pulses transmitting and returning are treated as a series of events, whose corresponding times are recorded. The interval between any pair of events can be recognized and calculated. Nowadays, many event timers have been successfully developed, such as the product manufactured by Dassault Ltd. in France, and ET-A032 provided by Riga University in Latvia. However, their interfaces are very complex. To meet the need of integration in mobile SLR system, an integrated event timer is designed and equipped in high repetition rate laser ranging, based on the time-to-digital conversion chip and FPGA technology.

The principle of event timer has been given in figure 2. There is a stable system clock derived by 100 MHz reference clock and PLL (Phase Locked Loop). Due to the needs of satellite observation, the system clock should be synchronized to the UTC time.

For example, there are two events (E_1, E_2), which happen during the time (02 : 30 : 00 – 02 : 30 : 01). If we enlarge this time period, like E_1 , the constant of the rising edge of the reference time is already known, equal to t_{M+2} . So if ΔT_1 is obtained, the constant of the event E_1 can be written as:

$$E_1 = T_{M+2} - \Delta T_1 \tag{1}$$

Similarly, the constant of event E_n can be written as:

$$E_n = t_{M+n+1} - \Delta T_n \tag{2}$$

By this way, the measurement of event constant can be converted into the measurement of corresponding time interval ΔT_n . For the SLR precision at the order of several centimeters, the precision of ΔT_n measurement should be much higher. If a general counter is used, the clock frequency of the counter must exceed 30GHz, which is impossible and unstable at present. Currently, the widely used methods are capacitive

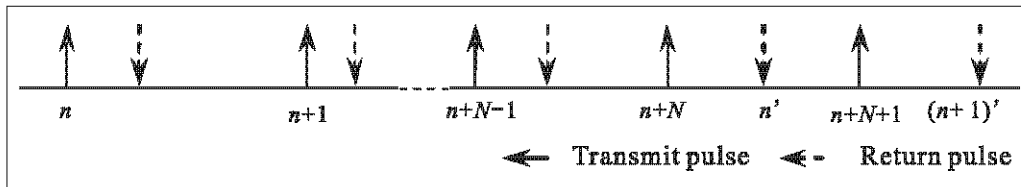


Figure 1 Timing diagram of kHz satellite laser ranging

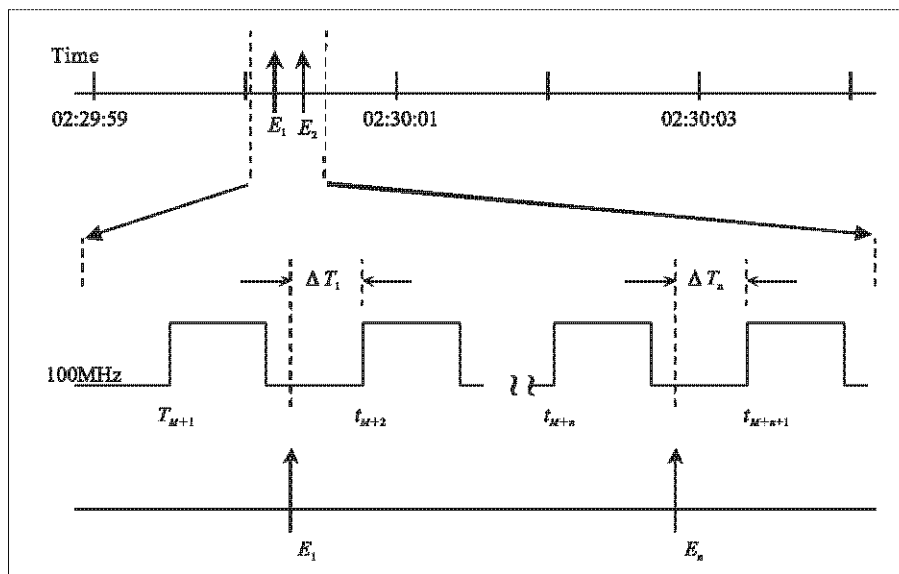


Figure 2 Measurement principle of event timer

Download English Version:

<https://daneshyari.com/en/article/4683697>

Download Persian Version:

<https://daneshyari.com/article/4683697>

[Daneshyari.com](https://daneshyari.com)