



# High power mode-locked rod-type fiber femtosecond laser with micro-joule energy

Zhiguo Lv<sup>a</sup>, Hao Teng<sup>b,\*</sup>, Lina Wang<sup>b</sup>, Rui Wang<sup>b</sup>, Junli Wang<sup>a</sup>, Zhiyi Wei<sup>a,b,\*\*</sup>

<sup>a</sup> School of Physics and Optoelectronic Engineering, Xidian University, Xi'an 710071, China

<sup>b</sup> Beijing National Laboratory for Condensed Matter Physics and Institute of Physics, Chinese Academy of Sciences, Beijing 100190, China

## ARTICLE INFO

### Article history:

Received 15 November 2015

Received in revised form

2 March 2016

Accepted 7 March 2016

Available online 10 March 2016

### Keywords:

Diode pump

Rod-type fiber

Femtosecond mode-locking

## ABSTRACT

We report a high power all-normal-dispersion (ANDi) mode-locked laser based on nonlinear polarization evolution (NPE) technique using rod-type fiber with polarization maintaining (PM) characteristic. With 85  $\mu\text{m}$  gain core diameter, 31 W of average power at repetition rates of 57.93 MHz, which corresponds to the pulse energy of 0.53  $\mu\text{J}$ , is demonstrated under a pump power of 93 W. The pulse duration of 124 fs after compressor is obtained at the central wavelength of 1033 nm as well as the measured power jitter of 0.3% over a period of 2 h.

Crown Copyright © 2016 Published by Elsevier B.V. All rights reserved.

## 1. Introduction

With the progress of the ultra-short pulse laser technology, stable high average power ultra-fast lasers at MHz repetition rate are increasingly demanded in a wide variety of industry and science research applications [1–4]. To date, among the various gain media used in laser technology, Yb-doped gain fibers and thin disk crystals are the most promising candidates to realize this goal as a result of the excellent heat dissipation and beam quality [5–6]. In particular, the Yb-doped double-clad large mode area (LMA) fibers [7] and large core diameter photonic crystal fibers (PCF) [8] increasingly dominate the realization of the high power ultra-short pulse laser amplifiers because of the inherent advantages than thin disk lasers. With the development of the femtosecond fiber lasers, the mode-locked mechanisms of the fiber oscillators have been demonstrated as soliton with only anomalous dispersion [9], stretched-pulse with dispersion map [10], self-similar in net normal group velocity dispersion (GVD) domain [11] and ANDi types [12]. Today, compared to laser amplifiers with chirped pulse amplification technique, the mode-locked femtosecond fiber lasers not only could emit comparable power level at MHz repetition rate, but also have advantages of compact configuration and low-cost. However in comparison to other types of mode-locked fiber lasers, due to the unique dissipative pulse shaping mechanism introduced in the ANDi fiber lasers, they support the generation of

the positive chromatic dispersion laser pulses with higher energy and power in theory, which also have been experimentally demonstrated [13].


To meet the demands of the different applications, various types of Yb-doped gain fibers have been employed in mode-locked ANDi fiber lasers, such as single-clad fibers [14], double-clad LMA PCF [15] and rod-type fibers [16]. Among them, rod-type fibers are the best choice for the generation of high power high energy femtosecond mode-locked lasers, due to low bending loss and high pointing stability from the rigid structure as well as supporting high power pumping. Therefore, mode-locked ANDi fiber lasers with only rod-type fiber as gain and nonlinear medium have been developed over the last few years using saturable absorber and passively mode-locked approach and the highest mode-locked output power is still 66 W [13,17–18]. However, because of the random birefringence introduced in frequently-used gain fiber, the mode-locked operation is sensitive to the external environmental perturbations, which makes it difficult to be operated beyond the laboratory.

In this paper, we aim at realizing stable high power mode-locked output with compact and concise configuration, rod-type fiber with PM characteristic (aeroGAIN-ROD-PM85, NKT photonics) is employed as gain medium and NPE mode-locking technique is adopted. To our knowledge, this is the first realization of the highest power of ANDi fiber laser by pure NPE mode-locking technique based on fibers with PM characteristic as gain media. Compared with other environmentally stable fiber lasers, which only consist of PM fibers as gain media and SESAM as modulation component [19–21], the fiber laser presented here overcomes certain substantial limitations of the SESAM and makes the power


\* Corresponding author.

\*\* Corresponding author at: School of Physics and Optoelectronic Engineering, Xidian University, Xi'an 710071, China.

E-mail addresses: [hteng@iphy.ac.cn](mailto:hteng@iphy.ac.cn) (H. Teng), [zywei@iphy.ac.cn](mailto:zywei@iphy.ac.cn) (Z. Wei).

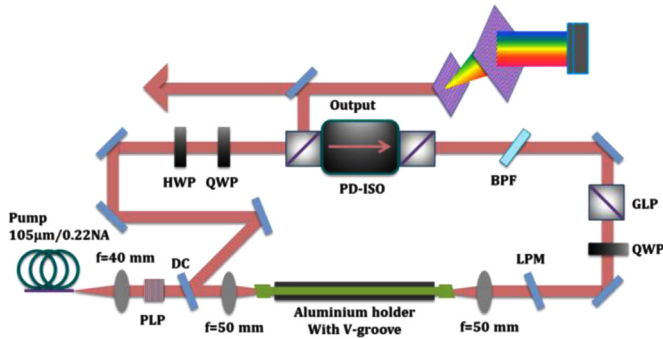

**Fig. 1.** Schematic diagram of the rod-fiber based ANDi laser. DM, dichroic mirror; PLP, pump laser protector; HWP (QWP), half- (quarter-) waveplate; PD-ISO, polarization-dependent isolator; BPF, birefringent plate filter; GLP, Glan laser polarizer; LPM, pump dump mirror. The rest unspecified mirrors are high reflective mirrors for the oscillated laser pulses in the ring cavity.

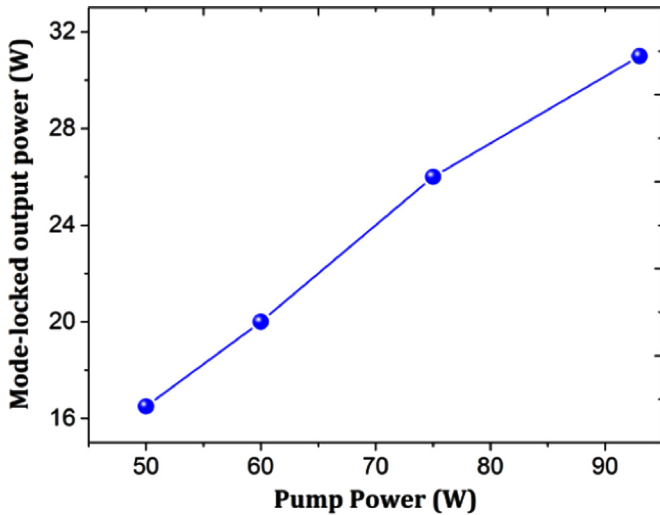

**Fig. 2.** Variation of the output power as a function of pump power.


scalable higher through the use of pure NPE technique. It should be noted that the mentioned above PM characteristic of the adopted rod-type fiber does not originate from PM structure, but the excellent isotropy without random birefringence, which is characterized by the polarization extinction ratio (PER) of  $> 15$  dB and has been widely used for PM amplification [22]. So, the presented mode-locked rod-type ANDi fiber laser is indeed robust against environmental perturbations and the maximum average mode-locked output power of 31 W is obtained at repetition rates

of 57.93 MHz under the pump power of 93 W, which corresponds to the single pulse energy of 0.53  $\mu$ J. The pulse duration of 124 fs after compressor is obtained at the central wavelength of 1033 nm. The performance of the short term power fluctuation is also measured to be less than 0.3% (RMS), which shows excellent mode-locked operation and we believe that this high power rod-type femtosecond laser has potential research applications.

## 2. Experiment and discussion

The experiment setup is shown in Fig. 1, which consists of a wavelength-stabilization pump laser diode (LD), a LMA rod-type gain fiber, counter-pumped ring cavity, and a grating-pair compressor. The LMA rod-type gain fiber has a core diameter of 85  $\mu$ m, and its pump cladding has a diameter of 260  $\mu$ m and a cladding numerical aperture (NA) of 0.5. Two angle-cleaved rod-type fiber end-caps facilitate the improvement of the fiber end facet damage threshold and effectively suppress the generation of the self-excited oscillation in high power pumped mode-locked operation. The ring cavity mainly consists of two Plano-convex lens, a polarization-dependent isolator (PD-ISO), polarization controller and birefringent modulation component. As spectral filter, the birefringent filter introduces a narrow spectral shaping in frequency domain so as to accumulate more intense nonlinear phase to initiate mode-locking [23]. For this process, the rod-type fiber not only provides a laser gain, but also acts as a nonlinear medium to generate new frequency components and simultaneously provides NPE to promote mode-locked operation. In addition, during the process of NPE evolution in rod-type fiber, the polarization states don't vary with surrounding perturbations due to the PM characteristic attributed to the excellent isotropy, and it ensures the environmentally stable operation. Considering efficient heat dissipation and stable mode-locked operation, the rod-type gain fiber is cooled down to 12  $^{\circ}$ C through circulated cooling water.

The pump laser emitted from the wavelength-stabilization LD is firstly collimated using an  $f=40$  mm aspherical lens, while an  $f=50$  mm aspherical lens is then used for coupling the pump laser into the pump cladding with an approximate spot size of 150  $\mu$ m and collimating the oscillated laser pulses from the rod-type fiber. Considering mode matching, which meets the condition of self-consistent as stable laser oscillation is built, a spherical lens with a focal length of  $f=50$  mm is employed in the cavity to coupling the oscillated laser pulses into the 85  $\mu$ m core rod fiber. In order to avoid the damage of the LD from the backward transmitted oscillated high peak power laser pulses, a PLP which consists of four dichroic mirrors is inserted into the optical path between aspherical collimated lens and focused lens. In order to eliminate the

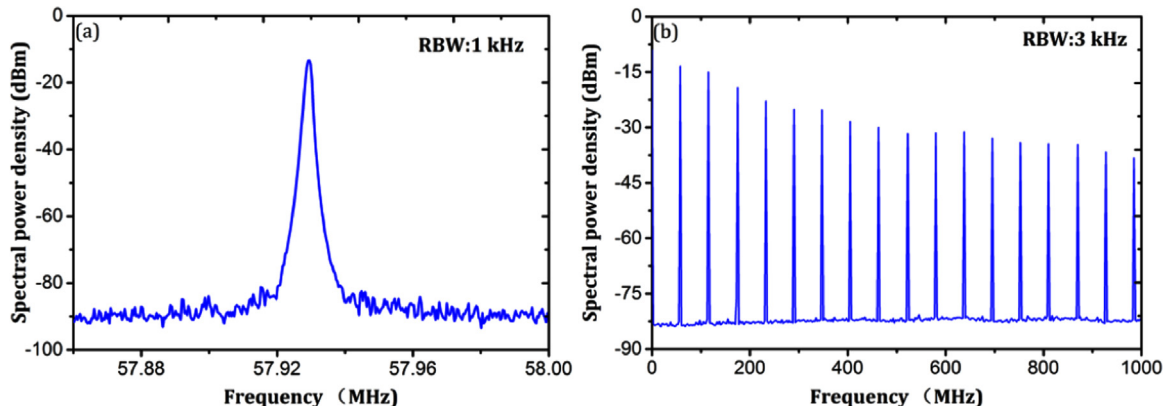

**Fig. 3.** RF spectra monitored with a photodiode and a frequency spectrum analyzer (Agilent E4407B). (a) The center repetition rate with 1 kHz resolution. (b) RF spectra with 1 GHz span.

Download English Version:

<https://daneshyari.com/en/article/1533234>

Download Persian Version:

<https://daneshyari.com/article/1533234>

[Daneshyari.com](https://daneshyari.com)