



Distributed strain measurement using a tellurite glass fiber with Brillouin optical correlation-domain reflectometry

Yosuke Mizuno *, Zuyuan He, Kazuo Hotate

Department of Electrical Engineering and Information Systems, The University of Tokyo, 7-3-1 Hongo, Bunkyo-ku, Tokyo 113-8656, Japan

ARTICLE INFO

Article history:

Received 19 November 2009

Received in revised form 1 February 2010

Accepted 1 February 2010

Keywords:

Tellurite glass fiber

Brillouin scattering

Brillouin frequency shift

Distributed strain measurement

Nonlinear optics

ABSTRACT

A tellurite glass fiber with a high Brillouin gain was employed for distributed strain measurement with Brillouin optical correlation-domain reflectometry (BOCDR). First, the spatial resolution of BOCDR was evaluated using the tellurite fiber. With the high Brillouin gain of the fiber, it was confirmed clearly in the experiment that the spatial resolution is limited by the Rayleigh scattering-induced noise. Then, the dependence of the Brillouin frequency shift (BFS) on strain in the tellurite fiber was investigated, showing a negative dependence with a coefficient of -0.023 MHz/ $\mu\epsilon$. Using this tellurite fiber, the distribution of the BFS around a 1-cm strain-applied section was successfully measured with BOCDR of a nominal spatial resolution of 6 mm.

© 2010 Elsevier B.V. All rights reserved.

1. Introduction

Brillouin optical correlation-domain reflectometry (BOCDR) [1] can measure the distribution of strain and/or temperature along a fiber under test (FUT) from a single end. So far, 13-mm spatial resolution has been achieved [2]. Although this resolution is the best ever reported in spontaneous Brillouin scattering-based reflectometers, it was limited by the signal-to-noise (S/N) ratio in the conventional silica fiber-based Brillouin gain spectrum (BGS) measurement. It is expected that the spatial resolution can be improved by using a specialty fiber with a large Brillouin gain coefficient as the FUT to enhance the S/N ratio.

Among various specialty fibers, tellurite glass fibers [3,4] have been vigorously studied due to their high refractive index ($n = 2.03$), high nonlinearity, and broad Raman gain bandwidth, and thus far been applied to developing optical devices, such as ultra-wide-band Raman fiber amplifiers (RFAs) [5], efficient Tm^{3+} -doped tellurite fiber lasers [6], and carrier-envelope offset (CEO)-locked frequency combs [7]. In addition to these applications, they can also be used as the gain medium for Brillouin scattering. Abedin [4] investigated the properties of stimulated Brillouin scattering (SBS) and the performance of slow light generation in an Er^{3+} -doped tellurite fiber, and showed that a tellurite fiber has a large Brillouin gain coefficient ($g_B \sim 1.7 \times 10^{-10}$ m/W) and is suitable for slow light generation.

* Corresponding author. Tel.: +81 3 5841 6768; fax: +81 3 5841 6025.

E-mail addresses: ymizuno@sagnac.t.u-tokyo.ac.jp (Y. Mizuno), ka@sagnac.t.u-tokyo.ac.jp (K. Hotate), hotate@sagnac.t.u-tokyo.ac.jp (K. Hotate).

In this paper, a tellurite fiber is employed in BOCDR to realize high-spatial-resolution distributed strain sensing. Although the background loss (~ 0.02 dB/m at 1550 nm) of the tellurite fibers is much higher than that of silica fibers (~ 0.0005 dB/m), making use of their high Brillouin gain, we believe tellurite fibers can be applied to developing short-range but high-spatial-resolution Brillouin sensors. First, the spatial resolution of BOCDR using the tellurite fiber is evaluated. With the high Brillouin gain of the fiber, it is confirmed clearly in the experiment that the spatial resolution is limited by the Rayleigh scattering-related noise. Next, the strain-dependence of the Brillouin frequency shift (BFS) in a tellurite fiber is investigated. It is found that, with increasing strain, the BFS in the tellurite fiber shifts toward lower frequency with a coefficient of -0.023 MHz/ $\mu\epsilon$. This negative dependence seems to be caused by the negative strain-dependence of the Young's modulus of the tellurite fiber. Then, a distributed strain measurement is performed by using this tellurite fiber as the FUT in BOCDR with a nominal spatial resolution of 6 mm, which is the inherent limitation as described later.

2. Principles

Brillouin scattering occurs when light is Bragg-reflected by the refractive index modulations produced by acoustic phonons. The backscattered light (Stokes light) suffers a Doppler shift called BFS, which depends on tensile strain applied to the optical fiber. For example, in a standard silica single-mode optical fiber (SMF), the BFS of about 11 GHz slightly varies to higher frequency in proportion to the applied strain with a coefficient of $+0.058$ MHz/ $\mu\epsilon$.

[8]. Hence, the BFS can provide the information on the strain magnitude in the fiber.

BOCDR is based on spontaneous Brillouin scattering. As described in [1], its basic principle is to generate a correlation peak within the FUT by applying the same frequency modulation to the pump and the reference light. The experimental setup is the same as that reported previously [9], where a polarization scrambler was inserted in the reference path to suppress the polarization-dependent fluctuations of the BGS. The measurement range d_m (distance between the correlation peaks) is given by

$$d_m = \frac{c}{2nf_m}, \quad (1)$$

where c is the velocity of light in vacuum, n the refractive index, and f_m the modulation frequency of the light source. The following expression of the spatial resolution Δz was derived for BOCDR [10,11], but it also holds well for BOCDR according to our previous experimental results [1,2,9]:

$$\Delta z = \frac{c \Delta \nu_B}{2\pi n f_m \Delta f}, \quad (2)$$

where $\Delta \nu_B$ is the Brillouin gain bandwidth in optical fibers, and Δf is the modulation amplitude of the light source. Here, it is known that f_m higher than $\Delta \nu_B$ does not contribute to the enhancement of Δz in Eq. (2) [10]. In addition, Δf must be lower than a half of the BFS of the FUT because of the behavior of Rayleigh scattering-related noise in BOCDR as described schematically in [1]. Therefore, under the condition of $f_m = \Delta \nu_B$, the limitation of the spatial resolution $\Delta z_{\min}$ is given, by the BFS, as

$$\Delta z_{\min} = \frac{c}{\pi n \text{BFS}} \quad (3)$$

In Table 1, n , BFS, and $\Delta z_{\min}$ of silica, bismuth oxide [12], As_2Se_3 chalcogenide [13], and tellurite fibers are summarized. About 6-mm spatial resolution is expected by using a tellurite fiber.

3. Experiments

First, we evaluated experimentally the spatial resolution of BOCDR using the tellurite fiber. The structure of the FUT is depicted in Fig. 1. Since it is difficult to directly splice a tellurite fiber (5 m) to an SMF with a good mode matching, a dispersion-compensation fiber (DCF) (30 cm) was inserted between them. One end of the tellurite fiber was connected to the DCF with a tilted V-groove connection [14], and the other end was bent to suppress the Fresnel reflection. The light-source modulation frequency f_m was set to 7.8028 MHz to place a correlation peak within the tellurite fiber.

Fig. 2 shows the whole spectra of the electrical output of the BOCDR system when Δf was increased from 0.1 to 4.0 GHz. Due to the large Brillouin gain coefficient of the tellurite fiber, along with its strong Rayleigh scattering, the evolution of the spectra was observed much more clearly than that in our previous experiment [1]. As Δf became larger, the spectrum of the Brillouin-scattered light broadened in both directions for $2\Delta f$ around the BGS peak at about 8 GHz. The BGS peak frequency gives the BFS at a specific position in the FUT selected by the light-source frequency

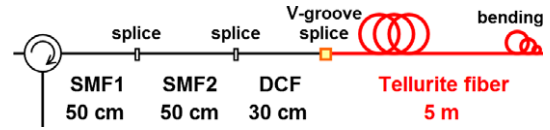


Fig. 1. Structure of the FUT.

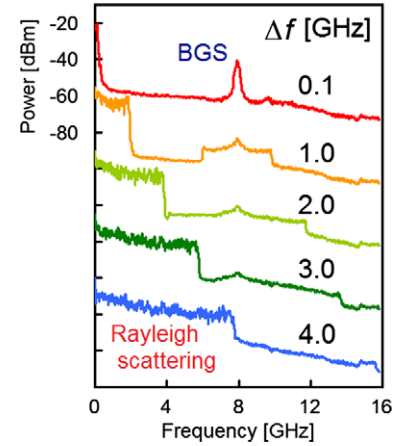


Fig. 2. Electrical spectra when the modulation amplitude Δf was increased from 0.1 to 4.0 GHz. Each spectrum is shifted by 35 dB. The values on the ordinate are valid only for $\Delta f = 0.1$ GHz.

modulation. This is the mechanism of the distributed measurement of BOCDR [1]. In Fig. 2, a large amount of noise spreading from 0 Hz to $2\Delta f$ is also clearly shown, which is induced by the Rayleigh scattering. When Δf was 4.0 GHz, the noise began to overlap the BGS peak. This result confirms experimentally that the limitation of Δf is a half of the BFS of the fiber, and thus the spatial resolution must be larger than the value given in Eq. (3).

Next, the strain-dependence of the BFS in the tellurite fiber was investigated using the same FUT. Since the tellurite fiber was short, the measurement was conducted using BOCDR to place the measurement window (the correlation peak) within the tellurite fiber to remove the effects of other fibers. Δf and f_m were set to 1 GHz and 7.8028 MHz, respectively, which correspond to the measurement range d_m of 9.47 m and the spatial resolution Δz of about 3 cm according to Eqs. (1) and (2). As shown in Fig. 3, $\Delta \nu_B$ was 10 MHz, which is much narrower than those of more than 23 MHz reported so far [4,15] probably due to the high-gain condition and the difference in glass purity. In the tellurite fiber, different strains were applied to a 40-cm section (5.7–6.1 m from the

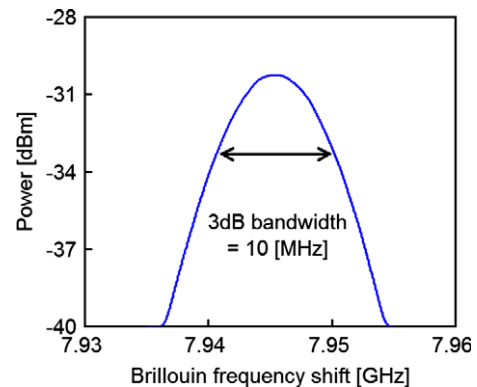


Fig. 3. Measured BGS from 5-m tellurite fiber with no strain applied.

Table 1
 n , BFS, and $\Delta z_{\min}$ of silica, bismuth-oxide [12], As_2Se_3 chalcogenide [13], and tellurite fibers.

Fiber	n	BFS (GHz)	$\Delta z_{\min}$ (mm)
Silica	1.46	10.86	6.0
Bismuth oxide	2.22	8.83	4.9
Chalcogenide	2.8	7.97	4.3
Tellurite	2.03	7.95	5.9

Download English Version:

<https://daneshyari.com/en/article/1538237>

Download Persian Version:

<https://daneshyari.com/article/1538237>

[Daneshyari.com](https://daneshyari.com)