



2016 International Electrical Engineering Congress, iEECON2016, 2-4 March 2016, Chiang Mai, Thailand

Non-Intrusive Appliances Load Monitoring (NILM) for Energy Conservation in Household with Low Sampling Rate

Somchai Biansoongnern ^{a,*}, Boonyang Plungklang ^a

^aDepartment of Electrical Engineering, Faculty of Engineering, Rajamangala University of Technology Thanyaburi, Thailand

Abstract

This paper presents a design and construction of measuring system to measure the power consumption of a split type air conditioning unit and refrigerator in household for energy conservation without having to install any instrument directly to appliances. The system will be only using aggregate power consumption data from only one instrument installed at main power distribution board and using proposed algorithm to disaggregate power consumption data of selected appliances, it is called Non-Intrusive Load Monitoring (NILM). It can significantly reduce cost and time in home energy audit. In this paper authors have used 3 points of monitored data to detect any change of power signal that obtained a 1 Hz sampling rate of active power from energy meter. The proposed method uses basic knowledge about specified air conditioning and refrigerator to establish criteria of disaggregation. Significant saving in air conditioner and refrigerator energy consumption can be achieved by real-time information on their in use. The results showed that the proposed system can disaggregation energy of air conditioner in accuracy 90.71% and refrigerator in accuracy 89.95% from total consumes energy.

© 2016 The Authors. Published by Elsevier B.V. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Peer-review under responsibility of the Organizing Committee of iEECON2016

Keywords: NILM; Load Disaggregate; Smart Meter

1. Introduction

Significant savings in energy consumption can be achieved by improved energy management in buildings¹. Other advanced control algorithms, real-time information on appliances in use. Components of an air conditioner are

* Corresponding author. Tel.: +66-2-549-3420; fax: +66-2-549-3422.

E-mail address: somchai.b@en.rmutt.ac.th

evaporator and condenser with fans plus a compressor. Replacing a dirty, clogged filter with a clean one can lower air conditioner's energy consumption by 5% to 10%². Real time energy consumption of refrigerators can be used to plan to defrost. Frost in refrigerator increases the amount of energy needed to keep the motor running. Manual defrost refrigerators is necessary to realize the energy savings. A continuous feedback on the air conditioner and refrigerator power draw can lead to significant energy saving. The system uses a single energy meter of main point to obtain a 1 Hz sampling rate of active power.

2. Non-Intrusive Load Monitoring

The main idea of Non-Intrusive Load Monitoring (NILM) is to obtain appliance-specific information non-intrusively³. The information is collected at the main input, and then disaggregated to obtain operational time and power draw information. Fig.1 shows an example of an aggregated power signal and the corresponding NILM solution. The main signal consist with refrigerator LED TV and fan signal. In this illustration, the reconstructed operational time of fan is from 6:30 AM to about 9:30 AM with the power draw is about 46 W and LED TV is from 6:05 AM to about 8:35 AM with the power draw is about 58 W. In this example, the appliances are modeled as on/off load that consume constant active power at a single steady state. NILM system elements can be divided into four parts as follows:

Hardware, this element used to measure and record data including a power meter that install at main circuit. The method of read data from meter can be used low sampling rate (equal or less than 1 Hz) or high sampling rate (equal or greater than 1000 Hz).

Event Detection is software that detects the change of power or other changes in parameter of electricity. That represents a change in operating conditions of the equipment. A transition of active power from a high to low, can determine whether the machine is turned on or active power transition from a low to high can indicate that the machine is turned off. It can be mathematically expressed as Eq. 1:

$$\Delta P = P_{t_2} - P_{t_1} \quad (1)$$

where ΔP is a change of active power, P_{t_1} is the steady-state active power at time t_1 and P_{t_2} is the steady-state active power at time t_2 .

Data disaggregation is software that acts as disaggregation or grouped the electrical equipment that on or off. The supervised disaggregation algorithm for Non-Intrusive Load Monitoring can be categorized into pattern recognition methods or optimization methods⁴.

-Optimization Methods: In the case it compares the extracted feature data of an unknown appliances to that of known appliances present in the cluster of the database and search the closest match by minimization the error between them. It can be expressed as a mathematical Eq. 2:

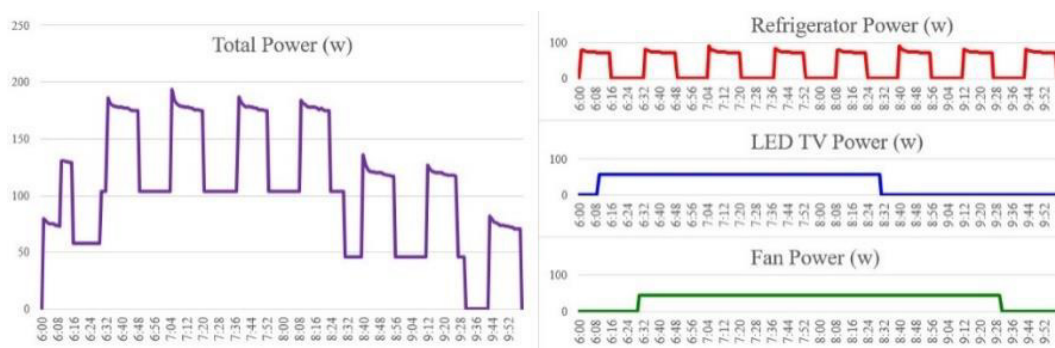


Fig. 1. NILM classified an input signal into individual appliances

Download English Version:

<https://daneshyari.com/en/article/486907>

Download Persian Version:

<https://daneshyari.com/article/486907>

[Daneshyari.com](https://daneshyari.com)