


## Accepted Manuscript

Cost-Effective Barrier Coverage Formation in Heterogeneous  
Wireless Sensor Networks

Zhibo Wang, Qing Cao, Hairong Qi, Honglong Chen, Qian Wang

PII: S1570-8705(17)30105-1  
DOI: [10.1016/j.adhoc.2017.06.004](https://doi.org/10.1016/j.adhoc.2017.06.004)  
Reference: ADHOC 1558

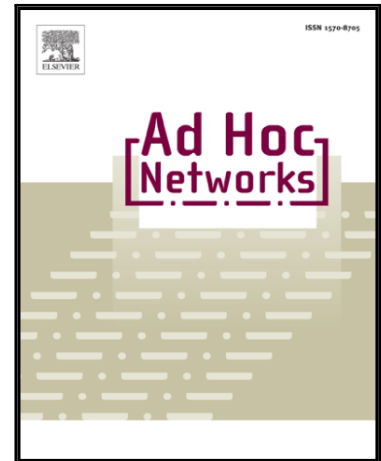

To appear in: *Ad Hoc Networks*

Received date: 28 December 2016  
Revised date: 19 April 2017  
Accepted date: 19 June 2017

Please cite this article as: Zhibo Wang, Qing Cao, Hairong Qi, Honglong Chen, Qian Wang, Cost-Effective Barrier Coverage Formation in Heterogeneous Wireless Sensor Networks, *Ad Hoc Networks* (2017), doi: [10.1016/j.adhoc.2017.06.004](https://doi.org/10.1016/j.adhoc.2017.06.004)

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

# Cost-Effective Barrier Coverage Formation in Heterogeneous Wireless Sensor Networks

Zhibo Wang<sup>a,b</sup>, Qing Cao<sup>b</sup>, Hairong Qi<sup>b</sup>, Honglong Chen<sup>c</sup>, Qian Wang<sup>a,d</sup>

<sup>a</sup>State Key Lab of Software Engineering, School of Computer, Wuhan University, CHINA

<sup>b</sup>Electrical Engineering and Computer Science, University of Tennessee, Knoxville, USA

<sup>c</sup>Information and Control Engineering, China University of Petroleum, Qingdao, CHINA

<sup>d</sup>Key Lab of Aerospace Information Security and Trusted Computing, Wuhan University, CHINA

---

## Abstract

Barrier coverage is a critical issue in wireless sensor networks (WSNs) for security applications, which however cannot be guaranteed to be formed after initial random deployment of sensors. Existing work on barrier coverage mainly focus on homogeneous WSNs, while little effort has been made on exploiting barrier coverage formation in heterogeneous WSNs where different types of sensors are deployed with different sensing models and costs. In this paper, we study how to efficiently form barrier coverage by leveraging multiple types of mobile sensors to fill in gaps between pre-deployed stationary sensors in heterogeneous WSNs. The stationary sensors are grouped into clusters and a cluster-based directional barrier graph is proposed to model the barrier coverage formation problem. We prove that the minimum cost of mobile sensors required to form a barrier with stationary sensors is the length of the shortest path on the graph. Moreover, we propose a greedy movement algorithm for heterogeneous WSNs to efficiently schedule different types of mobile sensors to different gaps while minimizing the total moving cost. In particular, we formulate the movement problem for homogeneous WSNs as a minimum cost bipartite assignment problem, and solve it in polynomial time using the Hungarian algorithm. Extensively experimental results on homogeneous and heterogeneous WSNs demonstrate the effectiveness of the proposed algorithms.

*Keywords:* Wireless sensor networks, barrier coverage, heterogeneous sensors, mobile sensors

---

## 1. Introduction

Wireless sensor networks (WSNs) have been widely used as an effective surveillance tool for security applications, such as battlefield surveillance, border protection, and airport intruder detection. To detect intruders who penetrate

---

*Email address:* zbwang@whu.edu.cn (Zhibo Wang)

Download English Version:

<https://daneshyari.com/en/article/4953542>

Download Persian Version:

<https://daneshyari.com/article/4953542>

[Daneshyari.com](https://daneshyari.com)