

Accepted Manuscript

Application of a multi-function solar-heat pump system in residential buildings

Gang Wang, Yaohua Zhao, Zhenhua Quan, Jiannan Tong

PII: S1359-4311(17)34111-X

DOI: <https://doi.org/10.1016/j.applthermaleng.2017.10.046>


Reference: ATE 11244

To appear in: *Applied Thermal Engineering*

Received Date: 18 June 2017

Revised Date: 2 September 2017

Accepted Date: 9 October 2017

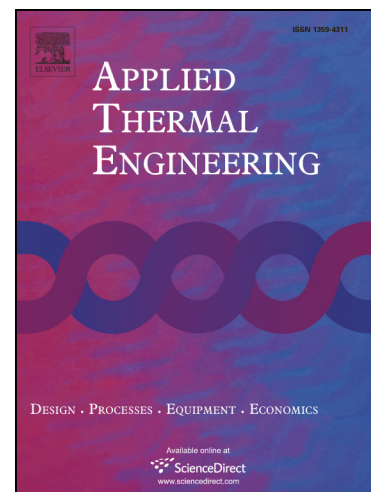

Please cite this article as: G. Wang, Y. Zhao, Z. Quan, J. Tong, Application of a multi-function solar-heat pump system in residential buildings, *Applied Thermal Engineering* (2017), doi: <https://doi.org/10.1016/j.applthermaleng.2017.10.046>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

Application of a multi-function solar-heat pump system in residential buildings

Gang Wang^a, Yaohua Zhao^{a, b}, Zhenhua Quan^{a, b, *}, Jiannan Tong^a

^aBeijing Key Laboratory of green built environment and energy efficient technology,

Beijing University of Technology, Beijing 100124, China

^bBeijing Advanced Innovation Center for Future Internet Technology

Highlights

- (1) Solar PV/T collector based on micro heat pipe array was employed, of which performance was improved.
- (2) Multi-function heat pump system was designed to realize the utilization of renewable energy.
- (3) Solar PV/T collector was combined with the multi-function heat pump system to form the new system.
- (4) The residential demand could be afforded by operating in different modes to realize maximum possible energy conservation.

Abstract: In this study, a multi-function solar photovoltaic/thermal (PV/T)-heat pump system was designed and established to supply energy for residential buildings. The system could realize different functions by operating in different modes, such as heating in winter, cooling in summer, domestic water heating for a whole year, and part of household electricity demand. System performance was experimentally investigated. Results showed that the average overall efficiency of PV/T collector was more than 50% for PV/T water heating mode when solar irradiance was sufficient,

*Corresponding author. Tel.: +86-18611003929
E-mail address: quanzh@bjut.edu.cn
Postal address: Beijing Key Laboratory of green built environment and energy efficient technology, Beijing University of Technology, Beijing 100124, China

Download English Version:

<https://daneshyari.com/en/article/7046470>

Download Persian Version:

<https://daneshyari.com/article/7046470>

[Daneshyari.com](https://daneshyari.com)