

Accepted Manuscript

Title: THE INFLUENCE OF BUILD PARAMETERS AND WIRE BATCH ON POROSITY OF WIRE AND ARC ADDITIVE MANUFACTURED ALUMINIUM ALLOY 2319

Authors: E.M. Ryan, T.J. Sabin, J.F. Watts, M.J. Whiting

PII: S0924-0136(18)30324-8
DOI: <https://doi.org/10.1016/j.jmatprotec.2018.07.030>
Reference: PROTEC 15857

To appear in: *Journal of Materials Processing Technology*

Received date: 9-4-2018
Revised date: 23-7-2018
Accepted date: 23-7-2018

Please cite this article as: Ryan EM, Sabin TJ, Watts JF, Whiting MJ, THE INFLUENCE OF BUILD PARAMETERS AND WIRE BATCH ON POROSITY OF WIRE AND ARC ADDITIVE MANUFACTURED ALUMINIUM ALLOY 2319, *Journal of Materials Processing Tech.* (2018), <https://doi.org/10.1016/j.jmatprotec.2018.07.030>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.



THE INFLUENCE OF BUILD PARAMETERS AND WIRE BATCH ON POROSITY OF WIRE AND ARC
ADDITIVE MANUFACTURED ALUMINIUM ALLOY 2319


*E. M. Ryan^{1,2}, T. J. Sabin¹, J. F. Watts², and M.J. Whiting^{2,1} *Lockheed Martin UK,*

¹*Reddings Wood, Ampthill, Bedfordshire, United Kingdom*

²*Department of Mechanical Engineering Sciences, University of Surrey, Guildford, Surrey, United Kingdom*

*Corresponding author: emma.ryan@surrey.ac.uk

Graphical Abstract

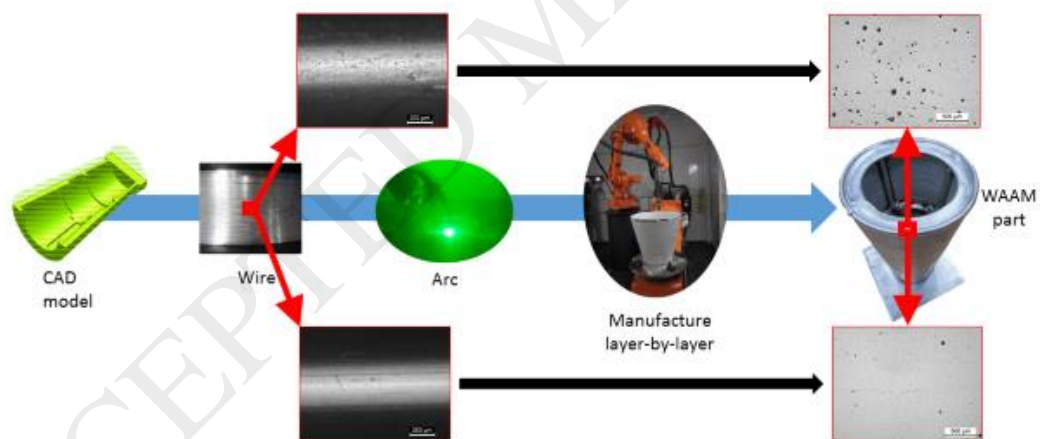

Download English Version:

<https://daneshyari.com/en/article/7176220>

Download Persian Version:

<https://daneshyari.com/article/7176220>

[Daneshyari.com](https://daneshyari.com)