



Crystal structure and oxygen storage properties of $\text{BaLnMn}_2\text{O}_{5+\delta}$ (Ln: Pr, Nd, Sm, Gd, Dy, Er and Y) oxides

Alicja Klimkowicz^{a,b}, Konrad Świerczek^{a,*}, Akito Takasaki^b, Janina Molenda^a, Bogdan Dabrowski^c

^a AGH University of Science and Technology, Faculty of Energy and Fuels, Department of Hydrogen Energy, al. A. Mickiewicza 30, 30-059 Krakow, Poland

^b Shibaura Institute of Technology, Department of Engineering Science and Mechanics, 3-7-5 Toyosu, Koto-ku, 135-8548 Tokyo, Japan

^c Northern Illinois University, Department of Physics, DeKalb, 60115 IL, USA

ARTICLE INFO

Article history:

Received 26 March 2014

Received in revised form 30 December 2014

Accepted 14 January 2015

Available online 15 January 2015

Keywords:

Oxides

Thermogravimetric analysis (TGA)

X-ray diffraction

Crystal structure

Energy storage

ABSTRACT

In this paper we report on crystal structure and oxygen storage properties of A-site cation ordered $\text{BaLnMn}_2\text{O}_{5+\delta}$ (Ln: Pr, Nd, Sm, Gd, Dy, Er and Y) perovskite-type oxides. The materials show practically complete and reversible change between fully reduced $\text{BaLnMn}_2\text{O}_5$ and oxidized $\text{BaLnMn}_2\text{O}_6$, which occurs at moderate temperatures (300–500 °C) during changes of the oxygen partial pressure (air, 5 vol.% H_2 in Ar). Based on the thermogravimetric measurements, reversible oxygen storage capacity, characteristic temperature of oxidation and reduction, as well as kinetics of these processes are given. Structural characterization was performed at room temperature for the reduced and oxidized materials by Rietveld analysis of the XRD data. These results are accompanied by *in situ* high temperature XRD measurements of the oxidation process, performed for $\text{BaNdMn}_2\text{O}_5$ in air.

© 2015 Elsevier Ltd. All rights reserved.

1. Introduction

Recently, oxygen storage materials (OSMs) attracted scientific interest due to their possible usage in various processes, in which a precise control of the oxygen partial pressure (p_{O_2}) is required [1–6]. Apart from commercial application in three-way catalysts, in which the best known CeO_2 – ZrO_2 solid solution-type oxides are utilized [7], OSMs may be possibly used in many developing technologies and industrial processes, e.g.: in air separation technology, solar water splitting, non-aerobic oxidation including flameless combustion of hydrocarbons, high-temperature production that requires high-purity oxygen, oxy-fuel and chemical looping combustion processes used in clean coal-type energy production, production of synthesis gas, SOFC technology, inert gas purification due to oxygen scavenger behavior, etc. [1,8–11].

While ceria-based materials may be further modified [12,13], also new compounds were studied, including Pr_2O_3 – $\text{Pr}_2\text{O}_3\text{SO}_4$ system, which exhibit unusually high theoretical capacity of the order of 18.50 wt.% (practical one ~9.3 wt.% at 700 °C), but suffers from evaporation of sulfur [11]. Recently, also $\text{BaLnMn}_2\text{O}_{5+\delta}$ perovskite-type oxides gained scientific interest in terms of their

applicability as oxygen storage materials [1,14–16]. As reported by Motohashi et al., the BaYMn_2O_5 – BaYMn_2O_6 system with a theoretical capacity equal to 3.85 wt.% shows high reversibility and practical capacity ~3.7 wt.% at 500 °C. This system shows reduced temperatures of reduction and oxidation processes, and fast kinetics of changes of δ occurring at 500 °C [1].

From the crystallographic point of view, both, reduced BaYMn_2O_5 and oxidized BaYMn_2O_6 belong to a family of A-site cation ordered $\text{BaLnMn}_2\text{O}_{5+\delta}$ manganites with layer-type ordering, for which the structure can be derived from that of a simple perovskite. It is known that a significant difference between ionic radius and/or oxidation state of cations occupying at the same time A- or B-site in ABO_3 are the causes responsible for the cation ordering [17]. Commonly, 1:1-, 1:2- or 1:3-type structures are observed. The mentioned $\text{BaLnMn}_2\text{O}_5$ and $\text{BaLnMn}_2\text{O}_6$ are the examples of 1:1-type order, in which Ba–Ln ordering occurs in a form of layers [18–22].

In the case of A-site 1:1 layered order, the aristotype space group is tetragonal $P4/mmm$ with doubling of the perovskite-related unit cell along *c*-axis [23]. In addition, depending on the Ln cation size, B-site rock salt-type cation ordering also occurs in $\text{BaLnMn}_2\text{O}_{5+\delta}$, giving rise to quite a complicated electronic structure diagram [20–22,24]. Oxygen anions, occupying positions within Ln-related layer can be extracted from the material relatively easy, and as was shown for $\text{BaYMn}_2\text{O}_{5+\delta}$, reduced

* Corresponding author. Tel.: +48 126174926.

E-mail address: xi@agh.edu.pl (K. Świerczek).

BaMn₂O₅ and BaMn₂O_{5.5} compounds exist, with structure originating from removal of all (for O₅) and every other (for O_{5.5}) oxygen from the mentioned positions [4,16,25].

Structural and oxygen storage-related properties of BaLnMn₂O_{5+δ} are expected to be dependent on the ionic size of Ln³⁺ cations. In this work, we report results of crystal structure of BaLnMn₂O₅ and BaLnMn₂O₆, together with reduction/oxidation behavior of the considered oxides in different atmospheres. The results are analyzed in terms of the influence of ionic radii of Ln³⁺, its electronegativity, as well as microstructure and specific surface area of the analyzed powders.

2. Experimental

BaLnMn₂O_{5+δ} (Ln: Pr, Nd, Sm, Gd, Dy, Er and Y) oxides with $\delta \approx 0$ were synthesized by a soft chemistry method. Respective nitrates were dissolved in small amount of deionized water, in stoichiometric proportions. Ammonia salt of ethylenediaminetetraacetic acid (EDTA) was added to the solutions, due to its complexing properties. Prepared mixtures were heated in quartz evaporators in air, up to about 400 °C. The heating process resulted in: an evaporation of water, a sol–gel transition, a decomposition of ammonium nitrate and finally, an oxidation of residual carbon, originating from EDTA. The obtained precursors were thoroughly ground and pressed into pellets having thickness of about 1 mm. The actual synthesis for BaLnMn₂O_{5+δ} (Ln: Pr, Nd, Sm, Gd and Y) was performed at 1100 °C, for 8 h in atmosphere of 1 vol.% of H₂ in Ar, with flow of gas of about 100 cm³ min^{−1}. In the case of BaDyMn₂O_{5+δ} sample, annealing was repeated three times, with intermediate grindings, and final temperature of 1000 °C. Synthesis method for BaErMn₂O_{5+δ} oxide, i.e., material with the smallest +3 cation being successfully introduced in Ln position, was described in the other paper [14]. For comparison, BaNdMn₂O_{5+δ} and BaYmMn₂O_{5+δ} were also prepared by a standard solid state reaction. In this paper these samples are referred as, for example, BaNdMn₂O₅ II.

Structural studies of the synthesized oxides were carried out in 10–110° range with CuKα radiation, using Panalytical Empyrean diffractometer. Data were collected on as prepared materials, as well as after reduction and oxidation. For high-temperature measurements, Anton Paar HTK 1200N oven-chamber was installed. Measurements of the oxidation of reduced BaNdMn₂O₅, as well as studies for oxidized BaNdMn₂O₆ were performed in air. For Rietveld analysis, GSAS/EXPGUI set of software was used [26,27]. For clarity of presentation of the graphs, CuKα2 was stripped from the data by Rachinger method. The measurements were performed at 25 °C and in 100–800 °C range with 100 °C step, with heating rate of 10 °C min^{−1}. Before 55 min collection of data, samples were equilibrated for 5 min at each temperature.

Oxygen storage-related properties, including reduction/oxidation runs, were determined by usage of thermogravimetric (TG) method. All experiments were conducted on TA Q5000IR apparatus. Measurements were done on powdered samples, obtained after grinding of sinters and sieving on 100 μm sieve. Atmosphere of 5 vol.% H₂ in Ar was used for the reduction, while the oxidation process was studied in synthetic air flow. For all studies, gas flow of 100 cm³ min^{−1} and heating rate of 5 °C min^{−1} were set up as the experimental conditions. Isothermal reduction/oxidation runs were collected at 500 °C, data shown in graphs concern 1st, 2nd or 5th cycle. Non-isothermal oxidations and reductions were collected after these five isothermal cycles. Calculation of the reversible oxygen storage capacity was corrected for buoyancy effect, which was established on a basis of runs performed without material (TG pan only).

Microstructural images of the reduced and oxidized materials were recorded on FEI Nova NanoSEM 200 microscope equipped with

low vacuum detector. Specific surface area of the considered powders was measured by N₂ adsorption using Gemini V Micromeritics apparatus. Data were analyzed assuming Brunauer–Emmett–Teller (BET) isotherm.

3. Results and discussion

3.1. Crystal structure of BaLnMn₂O₅ and BaLnMn₂O₆ at room temperature

XRD measurements performed after synthesis (both, by soft chemistry and solid state methods) indicated formation of A-site ordered phase for all studied BaLnMn₂O_{5+δ} materials, as documented by (0 0 1) peak visible in the vicinity of 11.5° for oxidized and reduced compounds [30]. Exemplary XRD data with Rietveld refinement for BaNdMn₂O₆ II are shown in Fig. 1. Intensity of the mentioned (0 0 1) peak was significantly smaller for materials with larger Ln³⁺ cations, suggesting partial mixing between Ln and Ba. Despite good quality data, it was unfortunately not possible to reliably determine degree of such mixing, due to a similar atomic mass of Ln and Ba. For the completeness of the structural data, Table 1 presents results gathered for all considered materials (Ln: Pr, Nd, Sm, Gd, Dy, Er and Y), some of which were already presented in our previous works. As can be seen, with the decreasing ionic radius of Ln³⁺, the relative increase of the normalized unit cell volume (i.e., divided to obtain cubic-like $1a_p \times 1a_p \times 1a_p$ unit cell) after the reduction process decreases, and the dependence between these two is linear ($R^2 = 0.996$). As the ionic radius of smaller Ln³⁺ is untypically small for 12-fold coordination, the normalized unit cell volume changes are weak in the case of such oxidized BaLnMn₂O₆. Structure of BaPrMn₂O₆ at room temperature (RT) was refined using aristotype $P4/mmm$ ($1a_p \times 1a_p \times 2a_p$) symmetry, consistent with previous report [22]. However, in the case of BaNdMn₂O₆ materials (from both synthesis methods), an evident split of (2 0 0) peak at ~46.5° was recorded at room temperature, indicating decrease of the crystal's symmetry. This distortion completely disappears already at 100 °C. It is known that in the vicinity of RT BaNdMn₂O₆ shows magnetic transitions, with the reported A-type antiferromagnetic ground state [31]. However, the magnetic phase diagrams elaborated in the literature differ significantly for this compound [21,22,24]. Therefore, it is not clear if the observed distortion can be connected to the presence of the

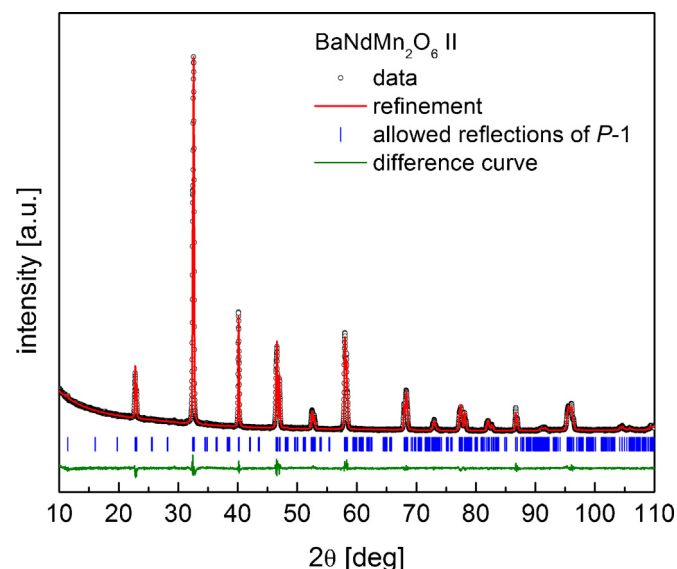


Fig. 1. Exemplary diffractogram with Rietveld analysis for BaNdMn₂O₆ II sample at room temperature refined assuming $P-1$ triclinic space group.

Download English Version:

<https://daneshyari.com/en/article/1487680>

Download Persian Version:

<https://daneshyari.com/article/1487680>

[Daneshyari.com](https://daneshyari.com)