

The 12th International Conference on Combustion & Energy Utilisation – 12ICCEU

Effect of Fuel Injection Pressure, Isobutanol and Ethanol Addition on Performance of Diesel-Biodiesel Fuelled D.I. Diesel Engine

G.R.K Sastry², Madhujit Deb³, Jibitesh Kumar Panda*

**M.Tech Scholar, NIT Agartala, India., ² Associate Professor, Dept of ME, NIT Agartala, India. Asst Prof, Dept of ME, NITA, India.*

Abstract

Biodiesel with additives is generally preferred for improvement of performance and emission characteristics of diesel engines. Higher fuel injection pressure is effective in improving the performance and reducing emissions. In the present work, Isobutanol and ethanol as additives to the diesel-biodiesel blends was investigated experimentally in a direct injection diesel engine. Isobutanol (A1) and Ethanol (A2) were added 5%-10% by volume to diesel-biodiesel blends and the performance and emissions characteristics at different injection pressures viz. 200, 225, 250 and 275 bars were studied. From the results, it was found that nozzle opening injection pressure could be increased up to 250 bar, as a result of which brake thermal efficiency and fuel economy of the engine were improved. Further, Carbon Monoxide (CO) emissions opacity was reduced significantly. However, Nitrogen Oxide (NO_x) emissions decrease in some blends marginally.

© 2015 The Authors. Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Peer-review under responsibility of the Engineering Department, Lancaster University

Keywords: D.I.-Direct Injection; Biodiesel-Fish oil Methyl Ester; Emissions; Performance

I. INTRODUCTION

Fuel injection pressure and additives play an important role in diesel engine performance. Higher injection pressure decreases the diameter of fuel particles. This results in better fuel-air mixtures, improved combustion, and performance characteristics. High pressure injection with small orifices can achieve lean combustion, better fuel atomization and evaporation with improved emissions. [1- 5] Recent studies show that additives have become indispensable tools for performance and emission improvement of the engines. In that, oxygenates like ethanol, isopropanol, isobutanol and isopentanol improved the performance parameters and reduced particulate matter significantly. [6- 8]. Gasoline-ethanol blends with additives such as cyclooctanol, cycloheptanol increase brake thermal efficiency with reduction in CO, CO₂ and NO_x. [9]. Present work attempts to investigate performance, emission characteristics of diesel engine with isobutanol and Ethanol as additive to the diesel-biodiesel blends at different injection pressures from 200 bars to 275 bars. Isobutanol has higher energy density and lower Reid Vapor Pressure (RVP) than diesel and hence it can be used as a potential fuel additive to motor gasoline and diesel fuels.

*Jibitesh Kumar Panda , +91 9437512117

jibiteshpanda90@gmail.com

II. MATERIALS AND METHODS

1. Experimental Set-up

Fig.1 shows the engine used for the investigation. It is a computerized, single cylinder, four stroke naturally aspirated, direct injection, water cooled diesel engine. Its specifications are shown in Table 2. The engine is directly coupled to an eddy current dynamometer. The engine and the dynamometer are interfaced to a control panel with a computer control. Engine soft, version 2.4, is used for recording the test parameters and for calculating the engine performance characteristics. The engine is coupled with computer controlled electronic variable injection system to increase/decrease the injection pressures as shown in fig.1

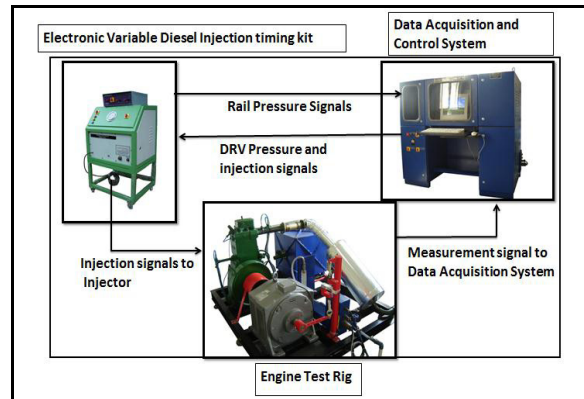


Figure1. Test Engine with fuel flow system

2. Test Fuels

For experimental investigation, biodiesel derived from fish oil is mixed with diesel in varying proportions such as 10%, 20%, and 30% by volume. To these blends, Isobutanol and Ethanol are added 5%, 10% by volume as additive. The blends are designated as B10, B20, B30 (B20 indicates biodiesel 20%, A1 10% isobutanol, 10% Ethanol 10% and remaining diesel by volume respectively). Table 1 shows the properties of isobutanol and Ethanol. Table 2 compares the properties of diesel, fish biodiesel (B100).

Table 1 Properties of Isobutanol and ethanol

Name of the fuel sample→ ↓ Characteristics	Isobutanol	Ethanol
Flash point, open cup, °C	37.7	9
Specific gravity, 20/20°C	0.8030	0.45
Viscosity at 20°C (Centipoises)	3.95	1.87
Auto ignition temperature, °C	440	425
Surface tension at 20°C, ((dynes/cm)	22.94	19.4
Heat of combustion, kJ/kg	36162	28959

Table 2. The properties of diesel, fish biodiesel (B100) and biodiesel with additive

S.No	Name of the fuel sample→ ↓ Characteristics	Diesel	B 100	B100 IB10
1	Kinematic viscosity(C.S)	3.15	10.15	8.56
2	Density(g/cm ³)	0.83	0.896	0.85
3	Flash point(°C)	60	141	115
4	Fire point(°C)	63	172	142
5	Lower calorific value(KJ/kg)	42500	37250	36800

Download English Version:

<https://daneshyari.com/en/article/1510750>

Download Persian Version:

<https://daneshyari.com/article/1510750>

[Daneshyari.com](https://daneshyari.com)