



## Letter to the Editor

# Synthesis of dysprosium and cerium nitrides by a mechanically induced gas–solid reaction

Patrick G. Callahan<sup>a</sup>, Brian J. Jaques<sup>a</sup>, Brian M. Marx<sup>a</sup>, Abdel Salam Hamdy<sup>b</sup>,  
Daniel D. Osterberg<sup>a</sup>, Darryl P. Butt<sup>a,\*</sup>

<sup>a</sup> Department of Materials Science and Engineering, Boise State University, 240C, Engineering and Technology, 1910 University Drive, Boise, ID 83725, United States

<sup>b</sup> Department of Surface Technology and Corrosion Protection, Central Metallurgical Research and Development Institute (CMRDI), P. O. Box 87, Helwan, 11421 Cairo, Egypt

## ARTICLE INFO

## Article history:

Received 18 September 2007

Accepted 12 February 2009

## PACS:

28.52.Fa

61.43.Gt

81.05.Je

81.20.-n

## ABSTRACT

A high energy ball milling process was used to produce dysprosium nitride and cerium nitride powders at room temperature. Dysprosium and cerium metal flakes were milled in a 275 kPa nitrogen atmosphere for 24 h at ambient temperatures. X-ray diffraction confirmed the formation of phase pure dysprosium nitride and cerium nitride powders. The median particle size of the resultant dysprosium nitride was measured as 4  $\mu\text{m}$  using a laser scattering technique. The particle size of the cerium nitride was not measured due to its reactive nature.

© 2009 Elsevier B.V. All rights reserved.

## 1. Introduction

Advanced nuclear fuel cycles are being developed in the US, Asia, and Europe to provide a transition from the current once through fuel cycle to a more environmental and effective energy solution. Such advanced fuel cycles require the use of complex nuclear fuels that are comprised of fissile materials such as plutonium, americium, neptunium, and curium in the form of oxides, metals, hydrides, and nitrides. Traditionally, oxide materials have been used as nuclear fuels due to desirable properties they exhibit but a few critical properties of the nitrides have been found to be better than those of the oxides. When compared to typical oxide fuels, nitrides require lower ‘burning’ temperatures and exhibit decreased cladding compatibility concerns due to their higher actinide densities, higher thermal conductivities, higher melting temperatures, and lower thermal expansion coefficients [1,2]. Although the nitrides are more efficient fuel forms, there are some disadvantages associated with them. Single phase mononitrides can be difficult to synthesize, difficult to handle (especially in the powder form due to their pyrophoric nature when exposed to oxygen), and difficult to analyze. Also, a great concern is the transmutation of  $^{14}\text{N}$  into  $^{14}\text{C}$ , a long-lived radiotoxic isotope which affects

the neutronics of the fuel. Consequently, the fuels will need to be synthesized using  $^{15}\text{N}$ , a costly alternative to  $^{14}\text{N}$ .

It is known that working with even minute quantities of radioactive materials requires numerous engineering and administrative controls and it is therefore more efficient to begin work with non-radioactive elements with similar properties to their radioactive counterparts, also known as surrogates. Dysprosium nitride (DyN) and cerium nitride (CeN) have been identified as surrogates for americium nitride (AmN) and plutonium nitride (PuN), respectively, because of their similar nitriding properties and from past studies [3–8]. Dysprosium nitride (DyN) also has a relatively high vapor pressure, which is similar to that of americium nitride (AmN) [4]. By using DyN and CeN as surrogates for AmN and PuN, many of the challenges that arise when working with actinides are reduced (or removed), worker exposure is minimized, and synthesis processes can be assessed without producing high level nuclear waste.

There are a few published methods for synthesizing nitrides from metals and oxides of dysprosium and cerium [9,10,4,11,12]. Such synthesis methods include: the heat treatment of pure metal in a nitrogen and hydrogen atmosphere followed by nitridation in a pure nitrogen atmosphere at high temperatures [9,10], reducing the oxide via a carbothermic reduction prior to nitridation in a nitrogen atmosphere [4,11], and a solution route [12]. These routes can require: relatively long synthesis times, multi-steps, excessive handling, production of waste from intermediate synthesis steps, and are expensive due to the required infrastructure. The

\* Corresponding author. Tel.: +1 208 426 1054; fax: +1 208 426 2470.

E-mail address: [DarrylButt@BoiseState.edu](mailto:DarrylButt@BoiseState.edu) (D.P. Butt).

mechanical synthesis route presented in this work is an economic alternative to existing thermal routes that require high purity atmospheres, high temperature furnaces, and much infrastructure. This mechanical synthesis technique is considered economic because its starting materials (pure metal) can be obtained directly from the products of spent fuel separations techniques (such as pyroprocessing or electrochemical refining). This mechanical route is viewed as advantageous because it converts a metal to a nitride at room temperature with a reduced number of handling/processing steps thereby minimizing the time and risks typically associated with handling the nitrides. This technique is also conducted within a closed system, thus reducing the amount of material lost to evaporation and handling.

Mechanical synthesis routes have been used to produce various nitrides from their respective metals such as TiN and ZrN [13,14]. This paper reports the first work demonstrating the direct nitridation of dysprosium and cerium metal via a mechanical ball milling route. This work was conducted in parallel with successful efforts to develop economical nitride synthesis methods for uranium nitride [15,16]. The results suggest direct nitridation of plutonium and americium as well as other actinides may be possible by this method, offering a relatively inexpensive, closed system for processing.

## 2. Experimental procedure

Dysprosium and cerium metals and their nitrides have a propensity to react with oxygen exothermically when exposed to air under ambient conditions. Therefore, the preparation and experimentation of the powders prior to and after milling were carried out in an argon atmosphere glove box. Throughout this work, it was found that CeN had a much higher propensity for oxidation compared to DyN.

### 2.1. Synthesis of DyN

To synthesize DyN, 5 g of 99.9% pure 420  $\mu\text{m}$  (–40 mesh) dysprosium metal flakes (ESPI, Ashland, OR, USA) were placed in a 250 ml chrome steel milling vessel under an argon atmosphere. About 70 g of 5 mm diameter yttria stabilized zirconia (YSZ) grinding media (TOSOH, Tokyo, Japan) were added to the milling vessel yielding a powder to mass ratio (PMR) of 1:14. The vessel was charged with ultra high purity nitrogen to 275 kPa. The dysprosium metal was milled at room temperature in a PM 100 planetary ball mill (Retsch, Haan, Germany) at 500 rpm for 24 h total in four sessions. The milling vessel was intermittently purged and recharged with nitrogen. The purges and recharges were performed after 2 h of milling, after an additional 4 h, and after an additional 8 h.

### 2.2. Synthesis of CeN

To synthesize CeN, 5 g of 99.9% pure 420  $\mu\text{m}$  (–40 mesh) cerium metal flakes (ESPI, Ashland, OR, USA) were placed in a 250 ml chrome steel milling vessel under an argon atmosphere. About 70 g of 5 mm diameter YSZ grinding media were used yielding a PMR of 1:14. The milling vessel was charged with ultra high purity nitrogen to 275 kPa. A single purge and recharge of nitrogen was performed after 2 h of milling. Milling was performed for 24 h. There were fewer purge and recharge cycles performed with the cerium experiment to minimize the amount of oxygen exposure to the sample as there is likely to be some oxygen introduced into the system each time the gas connections are attached and detached from the milling vessel.

### 2.3. Powder characterization

The resulting powders were characterized by X-ray diffraction (XRD) and their particle size distributions were measured using multiple laser scattering techniques. The XRD data were collected in air at room temperature using a Philips X'pert XRD system with a Cu K $\alpha$  source ( $\lambda = 1.5418 \text{ \AA}$ ) and a  $4^\circ/\text{min}$  scan rate in Bragg-Brentano geometry. Lorentzian fits of the first four XRD peaks were used to analyze the data. Powders were transferred from the milling vessel to an XRD sample holder in a glovebox under an argon atmosphere. The sample holders were sealed with vacuum grease and an X-ray transparent film to reduce the chance of oxidation during handling and analysis outside of the argon atmosphere glovebox. A Horiba LA-950 Laser Scattering Particle Size Distribution Analyzer (Minami-ku Kyoto, Japan) was used to determine particle size of DyN. The DyN was dispersed in deionized water and the system was given a refractive index of  $2.2 + 0.1i$ . The CeN was not analyzed with the particle size analyzer due to its reactivity with water.

## 3. Results and discussion

The XRD spectrum of the DyN sample which had a PMR of 1:14 and was milled for 24 h in 275 kPa nitrogen at room temperature is shown in Fig. 1. The only peaks present in the XRD spectrum are the DyN peaks (by comparison with the accepted data given by the Joint Committee of Powder Diffraction Standards (JCPDS)), indicating that the reactive ball milling route produced a phase pure DyN powder. Analysis of the XRD spectrum was performed using Lorentzian fits of the first four diffraction peaks and Bragg's equation (1):

$$n\lambda = 2d_{hkl} \sin \theta \quad (1)$$

where  $n$  is assumed to be 1,  $\lambda$  is the wavelength of the incident X-rays, and  $\theta$  is the position of the diffracted peak. The lattice constant of the ball milled DyN was found as  $0.487 \pm 0.001 \text{ nm}$ , which is in agreement with the published value of  $0.490 \text{ nm}$  [16,17]. Further analysis of the XRD spectrum was performed using the Lorentzian fits of the diffraction peaks and the Scherrer equation (2):

$$L = \frac{k\lambda}{\beta \cos \theta} \quad (2)$$

where  $k$  is a geometry constant and set to 0.9, and  $\beta$  is the breadth of the diffraction peak at half of its maximum value. The average crystallite size of the DyN was found to be  $8.0 \text{ nm}$ . A plot of particle

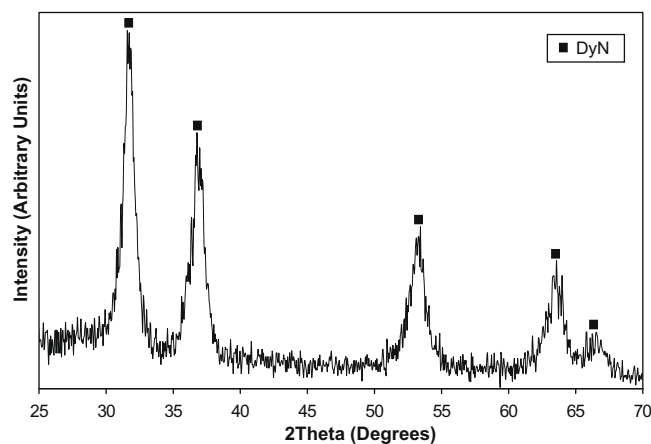


Fig. 1. XRD pattern of DyN that was synthesized by milling 420  $\mu\text{m}$  (–40 mesh) dysprosium metal flakes in a 275 kPa nitrogen atmosphere for 24 h at room temperature. Only DyN peaks are present.

Download English Version:

<https://daneshyari.com/en/article/1567775>

Download Persian Version:

<https://daneshyari.com/article/1567775>

[Daneshyari.com](https://daneshyari.com)