

23rd CIRP Conference on Life Cycle Engineering

Energy-saving Methods for Hydraulic Presses Based on Energy Dissipation Analysis

Mengdi Gao, Xinyu Li*, Haihong Huang, Zhifeng Liu, Lei Li, Dan Zhou

*School of Mechanical and Automotive Engineering, Hefei University of Technology, Tunxi Road 193, Hefei 230009, China** Corresponding author. Tel.: +86-139-6669-6141. E-mail address: li122425yu@126.com

Abstract

Hydraulic presses are large energy consumers in metal forming processes. In order to reduce carbon intensity and improve the energy efficiency, the overall carbon emissions of hydraulic presses was firstly analyzed. For a series of intermediate energy conversions in working processes, it is essential to understand and identify the energy dissipation characteristics of the investigated presses. Then, some energy matching methods for hydraulic drive system and a group of hydraulic presses in manufacturing system were presented to implement energy reduction. Finally, the proposed methodology shows a great energy-saving potential in sheet metal forming hydraulic presses.

© 2016 The Authors. Published by Elsevier B.V. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

Peer-review under responsibility of the scientific committee of the 23rd CIRP Conference on Life Cycle Engineering

Keywords: Carbon emissions; Hydraulic presses; Energy efficiency; Energy matching; Energy-saving

1. Introduction

The growing demand of energy and material resource has led to increasingly serious climate change. In 2013, the carbon emissions in the world set another record up to 36.1 billion tons [1]. Hydraulic presses are a mainstay in metal forming processes, owing to their ability to deliver high forming pressures; however, they are also large energy consumers [2, 3]. In 2013, China produced about 2 million metal forming presses. If the average power demand of one of these presses is 40 kWh, more than 280 billion kWh will be consumed per year, which is comparable to the total energy consumed by Spain in 2014 [4]. If 20% of the energy consumption was reduced, more than 57.1 billion kWh would be saved per year, which could reduce 47.62 million tons carbon emissions, it is equivalent to the amount CO₂ absorption of 5.83 million hectares forest a year [5]. Over the past several decades, much research has been performed on the efficiency and energy consumption of hydraulic presses [6, 7].

Energy losses generate from each part of hydraulic system in the way of energy transmitting. A perusal of the current literature reveals a number of developments in energy saving

targets in hydraulic driving system which can be divided into two categories: hydraulic units and hydraulic circuits. Selecting of high-efficiency hydraulic units, such as variable pump which can saving energy by changing its pressure or flow rate in relation to load [8-10], integrated valve which can minimize pressure drop by reducing pipeline connections [11], and energy accumulator which can bring down machine's installed power by providing large flow and absorb pressure pulse in a short time [12, 13], are all effective methods to save energy.

Another researches approached this issue from the design of hydraulic control system as power match, a widely used system is load sensing system. The basic idea of the load sensing (LS) technique is to control the flow supply via the feedback of the highest loaded pressure [14]. And the study is focused on the control method of the pressure and flow to follow the load change [15-17]. This system leads to the challenging controller design due to the presence of nonlinearity and high-order dynamic characteristics [18-20]. The energy saving effect of these methods above is extremely limited, which reduce energy consumption by optimizing the state of hydraulic system at working stage only.

Summarizing the findings above, it can be claimed that, the energy saving method and low carbon design of hydraulic press mainly focused on operation processes. In fact, we believe that low carbon design should be a life cycle process, it will not be achieved without analysis and quantification of the carbon emissions during manufacturing and working processes of a hydraulic press. In this paper carbon emissions and energy dissipation in hydraulic press were understood and identified. In order to reduce carbon intensity and improve the energy efficiency, some energy matching methods for hydraulic drive system and a group of hydraulic presses in manufacturing system were presented.

2. Carbon emissions analysis of the hydraulic press

Reduction of carbon emissions of hydraulic presses are an essential way to achieve low carbon manufacturing in various manufacturing system environments. To achieve this, the Life Cycle Assessment (LCA) methodology is applied to understand and characterize the life-cycle carbon emissions of the presses. The life-cycle carbon emissions include direct carbon emissions, energy carbon emissions and material carbon emissions.

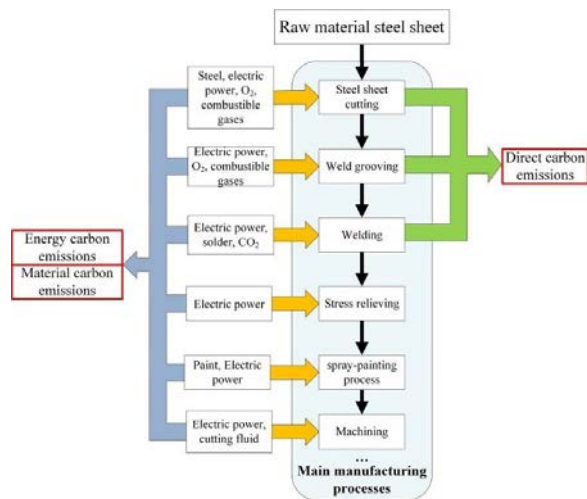


Fig. 1. System boundary in the carbon emissions analysis.

Carbon emissions in operation stage of hydraulic presses are main caused by energy consumption, so these emissions could be characterized by the quantification of energy dissipation. Hydraulic presses manufacturing stage is one of the main contributors of carbon emissions. It aims to find the potential to control carbon emissions in the equipment's manufacturing stage. The processes included in the system boundary are raw material acquisition, steel sheet cutting, weld grooving, welding and stress relieving, spray-painting and machining process. The scope omits the following factors which not directly related to the manufacturing processes: transportation, storage and some aided processes. The system

boundary of the carbon emissions analysis in the manufacturing stage is shown in Fig. 1.

A typical part of hydraulic presses, the slider, as the research object, for the manufacturing stage of this part includes all of the typical processes of a hydraulic press. The functional unit of the system was defined as a hydraulic press slider which connects piston rod and hydraulic cylinder. The calculation models of carbon emissions in each process of the manufacturing stage (raw material acquisition, steel sheet cutting, weld grooving, welding and stress relieving process) were established to study the key factors affecting carbon emissions.

The results was show in Table 1 and 2, it could be concluded that the use of raw material of steel sheet is the largest contributor to carbon emissions in the manufacturing stage of hydraulic presses. Welding is the second largest contributor to the carbon emissions, and the groove shape is the most critical factor for the consumption of welding wire. In addition, compared to other stress relieving methods, vibration ageing has a great advantage in controlling carbon emissions than annealing under the requirement of the design [21].

3. Quantification of energy dissipation in hydraulic press

Understanding and identifying the energy dissipation characteristics of hydraulic presses are a necessary precondition for energy-saving in operation stage. For a series of intermediate energy conversions in working processes, hydraulic press system is newly divided into six parts based on the characteristics of each component's energy conversion, as shown in Fig. 2.

The working procedure of the hydraulic press system under single operating condition can be expressed as a state transformation that the original characteristic state which is electric energy changes into required characteristic state which is deformation energy through serial media characteristic states by using a group of units. Based on the energy conversion characteristics of each unit, the system can be divided into six parts, respectively are electrical- mechanical energy, mechanical-hydraulic energy, hydraulic-hydraulic energy, hydraulic-mechanical energy, mechanical-deformation energy and thermal-thermal energy, which is different from traditional method which divide hydraulic system into traditional power supply units, control units, executive units and auxiliary units based on their functions [7,22].

Different units have their own energy dissipation characteristics. It's impossible to implement the real-time monitoring of each unit's output and input in the actual production conditions. So energy dissipation of each unit can be calculated indirectly in the field conditions. However, in order to get a simplified model of large and medium-size hydraulic press system's energy dissipation. The relatively small proportion of energy consumption can be simplified even ignoring. Based on the conservation law of energy, model of system's energy dissipation can be simplified into Equation (1) as follow:

Download English Version:

<https://daneshyari.com/en/article/1698692>

Download Persian Version:

<https://daneshyari.com/article/1698692>

[Daneshyari.com](https://daneshyari.com)