

Experimental and numerical investigations of the dry-low-NO_x hydrogen micromix combustion chamber of an industrial gas turbine



A. Haj Ayed^{a,*}, K. Kusterer^a, H.H.-W. Funke^b, J. Keinz^b,
C. Striegan^b, D. Bohn^c

^aB&B-AGEMA GmbH, Jülicher Str. 338, Aachen 52070, Germany

^bFH Aachen University of Applied Sciences, Hohenstaufenallee 6, Aachen 52064, Germany

^cRWTH Aachen University, Templergraben 55, Aachen 52062, Germany

Received 17 October 2014; accepted 2 April 2015

Available online 1 October 2015

KEYWORDS

Micromix combustion;
Hydrogen gas turbine;
Dry-low-NO_x (DLN)
combustion;
Hydrogen combustion;
High hydrogen
combustion

Abstract Combined with the use of renewable energy sources for its production, hydrogen represents a possible alternative gas turbine fuel within future low emission power generation. Due to the large difference in the physical properties of hydrogen compared to other fuels such as natural gas, well established gas turbine combustion systems cannot be directly applied for dry-low-NO_x (DLN) hydrogen combustion. Thus, the development of DLN combustion technologies is an essential and challenging task for the future of hydrogen fuelled gas turbines.

The DLN micromix combustion principle for hydrogen fuel has been developed to significantly reduce NO_x emissions. This combustion principle is based on cross-flow mixing of air and gaseous hydrogen which reacts in multiple miniaturized diffusion-type flames. The major advantages of this combustion principle are the inherent safety against flash-back and the low NO_x emissions due to a very short residence time of reactants in the flame region of the micro-flames.

The micromix combustion technology has been already proven experimentally and numerically for pure hydrogen fuel operation at different energy density levels. The aim of the present study is to apply and compare different combustion models for the characterization of the micromix flame structure, its interaction with the flow field and its NO_x emissions.

The study reveals great potential for the successful application of numerical flow simulation to predict flame structure and NO_x emission level of micromix hydrogen combustion, help

*Corresponding author. Tel.: +49 241 5687830.

E-mail address: ayed@bub-agema.de (A. Haj Ayed).

Peer review under responsibility of National Laboratory for Aeronautics and Astronautics, China.

understanding the flow phenomena related with the micromixing, reaction zone and NO_x formation and support further optimization of the burner performance.

© 2015 National Laboratory for Aeronautics and Astronautics. Production and hosting by Elsevier B.V.

This is an open access article under the CC BY-NC-ND license

(<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

1. Introduction

Aviation and power generation industry has need of efficient, reliable, safe and low-pollution energy conversion systems in the future. Gas turbines will play a decisive role in long-term high power application scenarios, and hydrogen has great potential as renewable and sustainable energy source derived from wind- or solar power and gasification of biomass substituting the limited resources of fossil fuels [1]. Hydrogen impacts the operation of common gas turbine systems due to its high reactivity requiring combustion chamber modifications to guarantee efficient, stable, safe and low NO_x combustion. Besides optimized combustion technology and related exhaust gas emissions, modifications of the gas turbine control and fuel metering system have to be applied to guarantee safe, rapid and precise changes of the engine power settings [2–7]. Against this background the Gas Turbine Section of the Department of Aerospace Engineering at Aachen University of Applied Sciences (AcUAS) works in the research field of low-emission combustion chamber technologies for hydrogen gas turbines and related topics investigating the complete system integration of combustion chamber, fuel system, engine control software and emission reduction technologies. The hydrogen gas turbine research at AcUAS started during the European projects EQHPP [8] and CRYOPLANE [9] where the low NO_x micromix hydrogen combustion principle was invented. When hydrogen is burned as fuel with air, only NO_x emissions occur, but Refs. [2,3,10,11] have

shown that the combustion process has to be modified and optimized in order to achieve low NO_x emissions. Because of the large difference in the physical properties of hydrogen compared to other fuels such as kerosene and natural gas, well established gas turbine combustion systems cannot be directly applied for dry-low- NO_x (DLN) combustion. Thus, the development of DLN hydrogen combustion technologies is an essential and challenging task. The DLN micromix combustion principle for hydrogen is being developed and optimized for years to significantly reduce NO_x emissions by miniaturizing the combustion zone, reducing the residence time of reactants in the combustion zone, and enhancing the mixing process using a jet in cross-flow design. A review of the previous research activities at AcUAS is presented in Ref. [12].

Especially the flame anchoring - mostly dominated by the resulting recirculation zones and vortices within the micromix burner geometry [10] and by the momentum flux ratio of the jet in cross-flow [11] - is most essential to the micromix low NO_x characteristics. Based on previous investigations a micromix combustion chamber with about 1600 miniature injectors (Figure 1) was designed for a small size Auxiliary Power Unit APU GTCP 36–300 and successfully tested [13].

The GTCP 36-300 requires about 1.6 MW thermal energy converted to shaft power generating electrical and pneumatic power up to 335 kW. The combustion section consists of an annular reverse flow combustion chamber in which the micromix combustor is to be integrated.

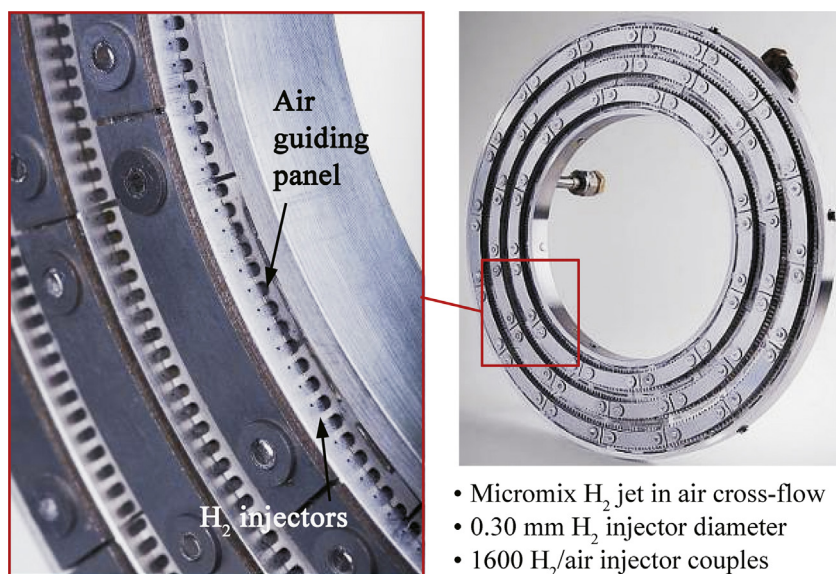


Figure 1 Micromix prototype combustor for gas turbine Honeywell/Garrett Auxiliary Power Unit APU GTCP 36-300.

Download English Version:

<https://daneshyari.com/en/article/1719631>

Download Persian Version:

<https://daneshyari.com/article/1719631>

[Daneshyari.com](https://daneshyari.com)