



ELSEVIER

Contents lists available at ScienceDirect

Renewable and Sustainable Energy Reviews

journal homepage: www.elsevier.com/locate/rser

A review of life cycle assessment method for building industry

Ahmad Faiz Abd Rashid ^{a,b,*}, Sumiani Yusoff ^b^a Department of Quantity Surveying, Faculty of Architecture, Planning and Surveying, Universiti Teknologi Mara, 40450 Shah Alam, Selangor, Malaysia^b Department of Civil Engineering, Faculty of Engineering, University of Malaya, 50603 Kuala Lumpur, Malaysia

ARTICLE INFO

Article history:

Received 24 July 2014

Received in revised form

21 November 2014

Accepted 6 January 2015

Available online 10 February 2015

Keywords:

Life cycle assessment

Building industry

Energy

Sustainability

ABSTRACT

A recent study suggested that buildings globally consume up to 40% of energy and responsible for half of world greenhouse gas emission. Introducing life cycle assessment (LCA) to the building industry is important because it can measure every environmental impact involved in every process from cradle to grave systematically. Within the last decade, research on LCA has increased covering from construction process to manufacturing of building materials. The methods to assess buildings are diverse as buildings have different functions, materials, sizes and locations. The aim of this article is to review the LCA methods and to distinguish phases and materials that affect significantly to environment. The findings show the methods are based on ISO 14040 series with variance to suit different scopes, aims and limitations. The operational phase is identified to consume the highest energy and concrete responsible for the highest embodied energy. The findings also suggested that building material with lower embodied energy does not necessarily have lower life cycle energy. Therefore, implementation of LCA can determine and mitigate the environmental impacts in the development stage thus promoting sustainability in building industry.

© 2015 Elsevier Ltd. All rights reserved.

Contents

1. Introduction	244
2. Basic concept of life cycle assessment	245
3. LCA concept and methodology in the building industry	245
3.1. Goal and scope definition	245
3.2. Inventory analysis	246
3.3. Impact assessment	246
3.4. Interpretation	247
4. Environmental impact of building	247
4.1. Impact of different building phases	247
4.2. Impact of material selection	247
5. Discussion	247
6. Conclusion	248
References	248

1. Introduction

The relationship between the building industry and environmental pollution is constantly discussed in close association. Although building industry is crucial for social and economic development, the environmental impacts of the processes are significant. In general, building industry consists of many phases starting from mining, manufacturing, construction, use and

* Corresponding author at: Department of Quantity Surveying, Faculty of Architecture, Planning and Surveying, Universiti Teknologi Mara, 40450 Shah Alam, Selangor, Malaysia. Tel.: +603 60381922.

E-mail address: afaiz@sarawak.uitm.edu.my (A.F. Abd Rashid).

demolition. Within each phase, a large amount of energy is consumed and at the same time a considerable emission is released. Energy is consumed directly during building construction, use and demolition while indirectly through producing materials (embodied energy) used in the building [1]. Recent studies identified that buildings all over the world responsible for 30–40% of energy use and 40–50% of world greenhouse gas emission [2,3].

Because of the increasing awareness on environmental issues and pressure from various government bodies and environmental activist, many studies have been conducted to reduce building's energy consumption and its environmental impact [4]. Currently, life cycle assessment (LCA) method is one of the measurement instruments that able to assess the environmental impact thoroughly and its implementation to the building industry is relatively recent. LCA has been defined as a systematic analysis to measure industrial processes and products by examining the flow of energy and material consumption, waste released into the environment and evaluate alternatives for environmental improvement [5–8]. LCA is accepted internationally as a tool to improve processes and services environmentally and it can apply to wider field, including in the building industry [9,10].

The implementation of LCA can help designer, engineer and decision maker by providing analytical evaluation environmentally. Without LCA, most decision will likely measure on initial cost rather than the overall environmental benefits [11].

2. Basic concept of life cycle assessment

LCA is a methodology framework to estimate and evaluate the environmental impact throughout the product life cycle from cradle to grave. [12,13]. The first phase of LCA which is defining goals and scopes will determine the purpose of the study, system boundaries and selection of suitable functional units. The second phase, which is life cycle inventory (LCI) is the data collection process of all relevant inputs and outputs of a product life cycle. The third phase, the life cycle impact assessment (LCIA) will use data from LCI and subsequently evaluates potential environmental impacts and estimate resource used in the study. The last phase is the interpretation which identifies significant issues, assess results to reach conclusions, explain the limitations and provide recommendations.

3. LCA concept and methodology in the building industry

Within the last decade, research on LCA has increased considerably covering from manufacturing of building materials and construction processes. Buildings are more difficult to assess as they are massive, diverse materials and their production method is

inconsistent because each building has a unique characteristic [14]. Furthermore, quantitative information about environmental impact of producing construction materials or the actual process of construction and demolition are limited [14].

The methodology of LCA research in the building industry however, still in a fragmented state due to a variety of case study buildings with diversity in materials selection, locations, construction process, building design and usage that will produce a different definition of goal and scope and will bind to certain limitations. Sometimes, the goal and scope can change due to unexpected problems encountered during the research [15]. Each research will respond to a predetermined system boundary, functional unit, building lifespan. Basically, there are three approaches in LCA research: 1) Process-based LCA; 2) Economic Input Output LCA (EIO-LCA); and 3) Hybrid LCA (Combination of process based and EIO-LCA). In general, process-based LCA is more complex and time consuming than EIO-LCA but the majority of the LCA research are applying process-based method [16]. Fig. 1 is a proposed LCA framework for the building industry adapted from various published research papers.

3.1. Goal and scope definition

According to ISO 14044 [21], the system boundary determines which processes should be included within the LCA and should be consistent with the goal of the study. Similar to other products, building's LCA system boundary consist of either a cradle-to-grave (Fig. 2), cradle-to-gate (for building product analysis) or gate-to-gate (for construction process analysis). In most cases, cradle-to-grave approach is normally being used which start from the pre-use phase to end-of-life (EOL) phase. Specific spatial and temporal boundary should also be included in the system boundary, acting as a research limitation and also for benchmark for future research.

Functional unit defines the quantification of identified functions of the selected product to ensure comparability [13]. Most researchers used a square meter (1 m²) of floor area as a functional unit for an LCA of a building. A few research however have included addendums to the 1 m² functional unit such as by specifically indicated a certain number of occupants in the building [19] and others only reflected to the heated areas only [17].

The lifespan of a building has a significant impact on the result of the LCA research especially because of the total energy consumption during use phase. In previous research, the lifespan of buildings is varied. For residential buildings, the lifespan is quoted between 40–100 years but mostly 50 years were applied by researchers [3,19,22–24]. The lifespan of commercial buildings is quoted between 40–75 years, but similar to residential buildings, 50 years were commonly used as a standard building lifespan [25–28].

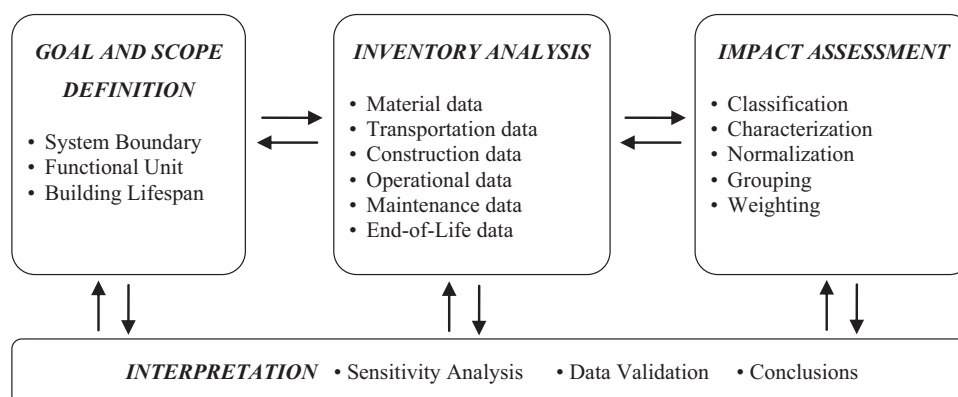


Fig. 1. LCA Framework for the building industry. Adapted from [13], [17]–[20].

Download English Version:

<https://daneshyari.com/en/article/1750045>

Download Persian Version:

<https://daneshyari.com/article/1750045>

[Daneshyari.com](https://daneshyari.com)