



FULL LENGTH ARTICLE

Delineating groundwater aquifer and subsurface structures by using geoelectrical data: Case study (Dakhla Oasis, Egypt)



Mahmoud Ismail Ismail Mohamaden

National Institute of Oceanography and Fisheries, Kayet Bey, El Anfoushy, Alexandria, Egypt

Received 13 February 2016; revised 30 April 2016; accepted 5 May 2016

Available online 2 June 2016

KEYWORDS

Dakhla Oasis;
 Groundwater;
 VES;
 Aquifer

Abstract Geoelectric technique has been used to detect the subsurface stratigraphy and structures around Dakhla Oasis, Egypt. 1D inversion approach has been applied to interpret the geoelectrical data obtained along 10 vertical electrical soundings (VES) using the well known Schlumberger array of AB/2 with electrode spacing varying from 3 to 400 m in successive steps.

A preliminary quantitative interpretation of the vertical electrical sounding curves was achieved firstly by using two-layer standard curves and generalized Cagniard graphs. The final models were obtained in 1D using IPI2 WIN program. The modeling results were used to construct a geoelectrical section.

Three geoelectric units were identified: The superficial geoelectrical layer is composed mainly of sand and gravel with relatively high resistivity values (7.61–346 Ω m) and thin thicknesses (0.252–9.19 m), of late Pleistocene to Holocene (Quaternary deposits).

The second geoelectrical layer is composed of shale (Dakhla Shale). It is characterized by relatively very low electrical resistivity values (0.3–8.68 Ω m). The maximum depth of this layer ranges from 4.18 to 56.4 m.

The Nubian sandstone (upper aquifer) third layer with moderate electrical resistivity values (68.5–1585 Ω m) can be detected at the maximum depth of penetration.

© 2016 Production and hosting by Elsevier B.V. on behalf of National Research Institute of Astronomy and Geophysics. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

1. Introduction

Dakhla Oasis (Fig. 1) is one of the Oases in the New Valley Government that economically, depends mainly on agricultural activities which yields a large amount of the agricultural drainage and wastewater. Such water is collected through drainage canals in the vacant and uncultivated lands, forming wastewater pond. The occurrence of most of that pond in the highlands is a risk of collapse of the wall and flooding

E-mail address: Mahmoud_Moha12@Yahoo.com

Peer review under responsibility of National Research Institute of Astronomy and Geophysics.



Production and hosting by Elsevier

<http://dx.doi.org/10.1016/j.nrjag.2016.05.001>

2090-9977 © 2016 Production and hosting by Elsevier B.V. on behalf of National Research Institute of Astronomy and Geophysics.

This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

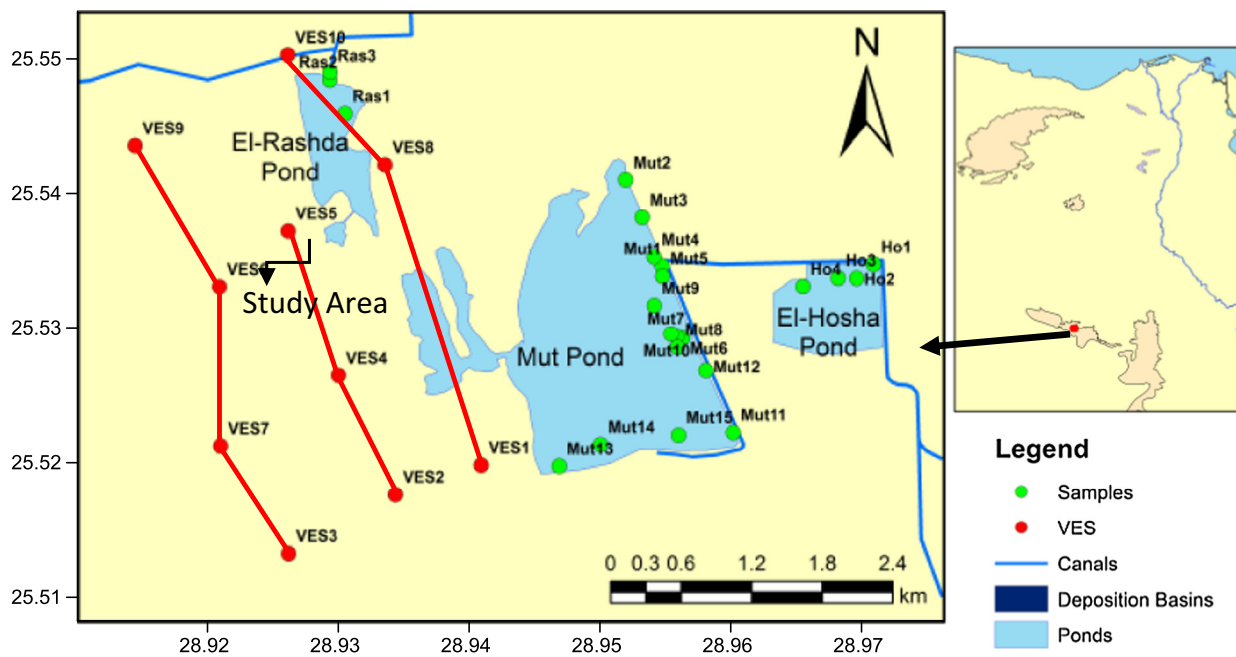


Figure 1 Location map showing Dakhla Oasis.

the neighboring cultivated lands. So, that pond represents serious threats to the population of that Oasis.

The target of the present study is to conduct geophysical investigation of the surrounding lands and to determine the shallow subsurface layers in these areas. Then, we can use the wastewater from that pond to cultivate the surrounding area without affecting the groundwater in the area under investigation.

The leakage of water into the underground aquifer represents a serious threat to the population in this region, especially because they are totally dependent on groundwater or flow of wastewater to the oasis. The presence of an impermeable layer such as shale and clays prevents the leakage of the wastewater into the underground freshwater aquifer. Therefore, the shallow subsurface layers were studied to determine the shale distribution and the possibility of leakage through the different areas around the ponds and to determine the suitable areas for further activities using the wastewater.

Geology of the study area and the successive sedimentary formations within the Dakhla depression dip steadily northward at a very small inclination. Consequently, every formation has a wide outcrop. In general, these formations crop out at the cliff to the north of the depression and they do not appear in the oasis depression itself (Ezzat, 1976). The late Mesozoic-Early Cenozoic rocks, which build the primary sedimentary cover in the area under discussion, are subdivided into a number of mappable lithostratigraphic units. The units are classified generally into two categories: (a) a Jurassic-Campanian sequence, predominantly continental but with marine intercalations, and (b) a Campanian-Lower Eocene transgressive-regressive open marine sequence.

Geophysical investigation is a powerful tool for exploring the subsurface geology and collecting more information about the subsurface layers and structures (Mohamaden et al., in press; El-Sayed, 2010). In this study, geoelectrical resistivity method was used for shallow subsurface investigation to determine the distribution and thickness of the shale layer.

Many authors such as Koefoed (1965a,b,c), Gosh (1971), Zohdy (1975, 1989), Santos et al. (2006), El-Galladi et al. (2007), Sultan et al. (2004, 2009a,b,c,d, 2009), Sultan (2009), Sultan and Santos (2008a,b), Mohamaden (2001, 2005, in press), Mohamaden and Abu Shagar (in press), Abbas and Sultan, 2008, Mohamaden et al. (in press), Abu El-Ata (2012). Hemeker (1984) studied the quantitative interpretation of the geoelectric resistivity measurements.

2. Geoelectric study

The electrical resistivity survey consists of a transmitter, receiver, power supply, stainless steel electrodes, and shielded cables. In the present study, IRIS SYSCAL-PRO instrument is used which computes and displays apparent resistivity for many electrode configurations.

The geoelectrical configuration used in the study is Schlumberger collinear four symmetrical electrodes configuration. The current electrode separation is about 400 m.

The result of the geoelectrical survey was processed and quantitatively interpreted using available geological information and presented as geoelectrical sections along the various profiles.

The obtained data are plotted using ready-made software in order to be processed and interpreted. After data processing and interpretation, layer parameters (true resistivities and thicknesses or depths) of the various current penetrated layers can be obtained (El-Sayed, 2010).

At this study, the area under investigation was covered by 10 vertical electrical soundings at three profiles named profiles 1, 2 and 3 (Fig. 1). These profiles run from north to south. The interpretation of the apparent electrical resistivity data was achieved using two methods, the first is based on curve matching technique using Generalized Cagniard Graph method constructed by Koefoed (1965a,b,c), and the output results are treated according to the inverse problem method using com-

Download English Version:

<https://daneshyari.com/en/article/1780569>

Download Persian Version:

<https://daneshyari.com/article/1780569>

[Daneshyari.com](https://daneshyari.com)