



ELSEVIER

Contents lists available at ScienceDirect

Nuclear Instruments and Methods in Physics Research A

journal homepage: www.elsevier.com/locate/nima

Thick target double differential neutron energy distribution from $^{12}\text{C} + ^{27}\text{Al}$ at 115 MeV

V. Suman^a, C. Sunil^{a,*}, Soumya Nair^a, S. Paul^a, K. Biju^a, G.S. Sahoo^a, P.K. Sarkar^b^a Health Physics Division, Bhabha Atomic Research Centre, Trombay, Mumbai 400085, India^b Manipal Centre for Natural Sciences, Manipal University, Manipal 576104, India

ARTICLE INFO

Article history:

Received 4 June 2015

Received in revised form

20 July 2015

Accepted 1 August 2015

Available online 11 August 2015

Keywords:

Thick target neutron yield

Neutron spectrum

Time of flight

FLUKA

PACE

Heavy ion reaction

ABSTRACT

Neutron yield from 115 MeV ^{12}C projectiles bombarding a thick ^{27}Al target has been measured using the time of flight technique. Nuclear reaction model code PACE and the FLUKA Monte Carlo code are used to calculate the yield and the results are compared with the experimental data. The energy for maximum neutron emission in experimental measurement and reaction code output has a slight disagreement in the extreme forward emission angle but in all other angles it has a close match. The slope of the distribution in general shows good match between the experimental and the reaction code results as well as FLUKA calculations. The maximum energy of the emitted neutrons is observed to decrease with the increasing emission angles.

© 2015 Elsevier B.V. All rights reserved.

1. Introduction

For accelerator radiation protection, the starting point is the characterization of the radiation source term, usually expressed in a radiation protection unit such as the ambient dose equivalent ($H^*(10)$) at a given angle with respect to the beam direction [1]. They are usually obtained by measurements using techniques/instruments such as conventional rem counters, track etch detectors, proton recoil techniques etc., or are computed using simple empirical techniques, standalone nuclear reaction model codes that can calculate the emission cross section, or by radiation transport codes that have various nuclear reaction models incorporated. In ion accelerators, neutrons are the major prompt radiation. Measuring neutron $H^*(10)$ with a conventional dose equivalent meter (rem counters) has its share of uncertainties in the form of energy response of the instrument. The primary invariant quantity required for estimating the ambient dose equivalent, obtained either by measurement or by computation, is the energy spectra of the radiation under consideration at various angles of emission with respect to the beam direction. In the case of neutrons, the source term, when described in terms of the hardness of the energy spectrum, the differential (in energy and solid angle) and integral yields and their angular distribution, will result in easy computation of the unshielded dose rates, help

frame empirical relations, determine the effective attenuation lengths of shielding materials and serve as a starting point for shielding and activation calculations using Monte Carlo radiation transport codes. While it is advisable to use experimental data as far as possible, the dearth of it necessitates the use of empirical techniques or reaction model codes. It is therefore important to study the effectiveness of such techniques and to understand any major deviations in their results when compared to experimental data.

The thick target neutron yield data from heavy ion reactions are very few in the energy range of ~ 10 MeV/A [2–6]. However, no experimental data has been reported for this system at 115 MeV [7]. The importance in studying the yield from thick targets, which stop the projectiles completely, is because it represents the accidental or intentional beam loss scenarios in an accelerator facility which produces the radiation that needs to be shielded. It is also a cause for secondary cancer induction in proton and heavy ion therapy as the secondary particles that are produced during the treatment, either from the passive scattering devices or from the tumor itself, will irradiate the healthy tissues. Estimating these quantities will require the understanding of the physics of the reaction for effective implementation in the Monte Carlo code such as FLUKA [8,9], which has the intranuclear cascade, pre-equilibrium and evaporation models built in to calculate the particle yields. At higher energies, the intranuclear cascade is the dominant mode of interaction. As the projectile energy reduces, pre-equilibrium (PEQ) emission begins to be important. At 10–15 MeV/amu and lower, PEQ is on the wane while the compound

* Corresponding author. Tel.: +91 22 25592012.

E-mail addresses: csunil11@gmail.com, sunilc@barc.gov.in (C. Sunil).

nucleus (CN) evaporation process is on the rise. It is important to know this transition point as the models that handle the PEQ and CN are different. Invoking them at the correct energy will result in a better prediction of the slope of the spectrum (hardness) and the overall yield. Testing of such models and the transition point require a large set of experimental data.

Here we report the experimental double differential neutron yield from 115 MeV ^{12}C (~ 9.6 MeV/amu) ions incident on a thick Aluminum target. The results are compared with the values obtained from the calculations using the nuclear reaction code PACE [10] and the FLUKA Monte Carlo code.

2. Experimental method

The experiment was carried out at the Linac extension of the Pelletron Accelerator facility BARC-TIFR, Mumbai, India. Carbon ions of 115 MeV were incident on a thick hemispherical shaped aluminum target of 3 mm thickness and 40 mm diameter. The thickness in all directions was more or less the same and was such that the neutrons do not undergo significant scattering and attenuation before reaching the detector. Calculations using the FLUKA code for 1 MeV neutrons indicate an attenuation of 5% and 8% at 3 mm and 5 mm thicknesses respectively. The attenuation is lower as the energy increases. The ions were completely stopped in the target since their range in Al is approximately 0.2 mm as calculated by the SRIM code [11]. The emitted neutrons were measured using five EJ-301 (5 cm \times 5 cm, Scionix Holland) liquid scintillation detectors, kept at a distance of 1.5 m at angles 0° , 30° , 60° , 90° and 120° with respect to the beam direction. To account for the background contribution from the scattered neutrons from the nearby structural materials, shadow bar correction was carried out for individual detectors. Here, an iron bar of diameter 5 cm and length 30 cm was kept followed by high density poly-ethylene (HDPE) of same dimensions in the line of the target and the detector. The high energy neutrons undergo inelastic scatterings in the iron bar, gets reduced in energy and undergo elastic scattering in the hydrogen rich HDPE before finally getting captured. Such an arrangement (Fig. 1) cuts off almost all the direct neutrons and only the scattered component are counted. The net counts from the direct neutrons were then obtained by subtraction. The target was electrically isolated and a precision beam current integrator (ORTEC make) was used to measure the total charge incident and thus the number of projectiles incident on the target.

The energy distribution of the emitted neutrons was measured using time of flight (ToF) technique while the pulse shape discrimination (PSD) method [12], was used to separate neutrons from photons. The anode output from the detector photo multiplier tube was given into a multi parameter discriminator (MPD-4,

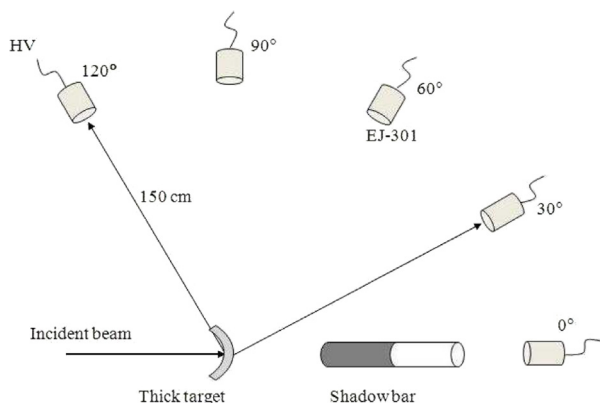


Fig. 1. Pictorial representation of the experimental arrangement used.

Mesytec) input. One channel of the MPD-4 gives three outputs (pulse height, pulse shape timing information (PST) and a logic gate signal) for every input. The gate obtained from each detector was split into two, and one from all the detectors were used in OR logic mode to generate a master gate for acquisition purpose. The second gates were used as start signal to the ToF time to amplitude converter (TAC, Canberra make). The stop signal for the ToF-TAC was drawn from the RF output of the buncher which signals the arrival of the beam bunch at the target. The full width at half maxima (FWHM) of the bunch was less than 1 ns as measured by a BaF₂ detector that was placed close to the target. The amplitude of the output from the ToF-TAC corresponds to the flight time of the event registered, either by photons or neutrons. Three parameters were drawn from each detector (fifteen in total) and fed to ADC (analog to digital converter) for acquisition in list mode. A simplified block diagram of the electronic setup used in the experiment with a single detector is shown in Fig. 2. The PST and ToF-TAC outputs obtained are shown in Figs. 3 and 4 respectively. The n - γ separation can be seen to be good and has a figure of merit (FOM, defined as the ratio of the separation of the peaks to the sum of the full widths at half maximum) close to 1.2. A two-dimensional plot was constructed using these two parameters and one such plot is shown in Fig. 5. When PST and ToF are used together, excellent n - γ separation is obtained as is seen in the figure. Software gates were then used to select the neutrons in an offline analysis. The flight information of neutrons was obtained from the TAC calibration factor and the position of the prompt gamma peak. This was converted to neutron energy, grouped in

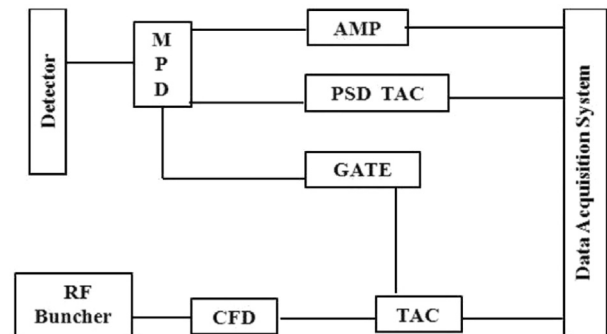


Fig. 2. Simplified block diagram for the electronics used for data acquisition (shown for one detector).

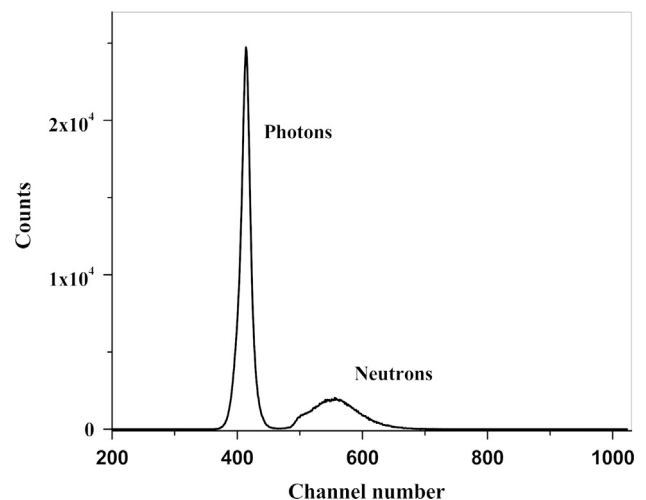


Fig. 3. Measured one dimensional pulse shape discrimination spectrum showing time separation for photons and neutrons.

Download English Version:

<https://daneshyari.com/en/article/1822362>

Download Persian Version:

<https://daneshyari.com/article/1822362>

[Daneshyari.com](https://daneshyari.com)