



## Use of SAR interferometry for monitoring illegal mining activities: A case study at Xishimen Iron Ore Mine

Ji Maowei<sup>a,b,\*</sup>, Li Xiaojing<sup>c</sup>, Wu Shunchuan<sup>a</sup>, Gao Yongtao<sup>a</sup>, Ge Linlin<sup>b</sup>

<sup>a</sup> School of Civil and Environmental Engineering, University of Science and Technology Beijing, Beijing 100083, China

<sup>b</sup> School of Surveying and Spatial Information Systems, University of New South, Sydney NSW 2052, Australia

<sup>c</sup> School of Civil and Environment Engineering, University of New South Wales, Sydney NSW 2052, Australia

### ARTICLE INFO

#### Article history:

Received 18 April 2011

Received in revised form 11 May 2011

Accepted 27 May 2011

Available online 17 December 2011

#### Keywords:

D-InSAR

Monitoring

Illegal mines

Surface deformation

### ABSTRACT

The development and application of the “digital mine” concept in China depends heavily upon the use of remote sensing data as well as domestic expertise and awareness. Illegal mining of mineral resources has been a serious long term problem frustrating the Xishimen Iron Ore Mine management. This mine is located in Wu’an county in Hebei province, China. Illegal activities have led to enormous economic losses by interfering with the normal operation of the Xishimen mine and have ruined the surrounding environment and the stability of the Mahe riverbed the crosses the mined area. This paper is based on field reconnaissance taken over many years around the mine area. The ground survey data are integrated with Differential Synthetic Aperture Radar Interferometry (D-InSAR) results from ALOS/PALSAR data to pinpoint mining locations. By investigating the relationship between the resulting interferometric deformation pattern and the mining schedule, which is known a priori, areas affected by illegal mining activities are identified. To some extent these areas indicate the location of the illegal site. The results clearly demonstrate D-InSAR’s ability to cost-effectively monitor illegal mining activities.

© 2011 Published by Elsevier B.V. on behalf of China University of Mining & Technology.

### 1. Introduction

The price of iron ore has been rising along with the development of fierce competition in the commodity metal market. Attracted by the tremendous profit, many illegal or secret iron ore mines are increasing their production. The destructive and disorderly operation of these iron mines results in the formation of mined out sections that then create hidden troubles for legal mining companies. Moreover, this underground mining might be carried out directly under the pit later causing a large subsidence across the mining area. It ruins the surrounding environment.

Xishimen, an iron ore mine owned by China Minmetals Corporation and located in the south of the Hebei, Hanxing Mining District in China, was the primary test site for the research described here. In the past few years, more than one hundred secret iron ore mines have existed around this mine. Since 2006, the Xishimen Iron Ore Mine has spent nearly 1 million RMB a year for restoring the environment that was destroyed by these illegal mines. A typical case is the subsidence over the Mahe riverbed. The unexpected collapsed pit occurred beyond the normal underground working sections and led to enormous economic losses as it would have ruined the whole underground working section had remedial measures related to the affected riverbed not been

carried out in time. Unfortunately, the location of such illegal mines and the devastation caused by them is very difficult to identify. Inevitably, passive remedial work replaces initiatives for monitoring the illegal mining activities. Handling these secret iron mines in developing countries with their particular economic and sociological needs is a challenging, but not intractable, problem.

Satellite borne, repeat pass differential synthetic aperture radar interferometry (D-InSAR) has already proven its potential for ground deformation monitoring. This is because of its high precision and high spatial resolution. D-InSAR has been successfully used for different applications including the monitoring of volcanic activity, earthquakes, glacier dynamics, landslides, and mine subsidence [1–9]. In many cases D-InSAR has demonstrated its capability for measuring surface movements on the order of centimeters. However, D-InSAR techniques have rarely been used for detecting illegal mines, especially in China.

This study is performed using field reconnaissance collected over many years around the mine area. The D-InSAR results are obtained using ALOS/PALSAR data.

### 2. Geological and environmental setting

The geological setting and features of Xishimen include a contact metasomatic magnetite deposit of skarn iron, which was deposited in the Wu’an area of the southern Taihang Mountains. Most of this ore conformation is massive, dense, and dip-dye, with

\* Corresponding author. Tel.: +61 42 5016565.

E-mail address: [jimaowei@126.com](mailto:jimaowei@126.com) (M. Ji).

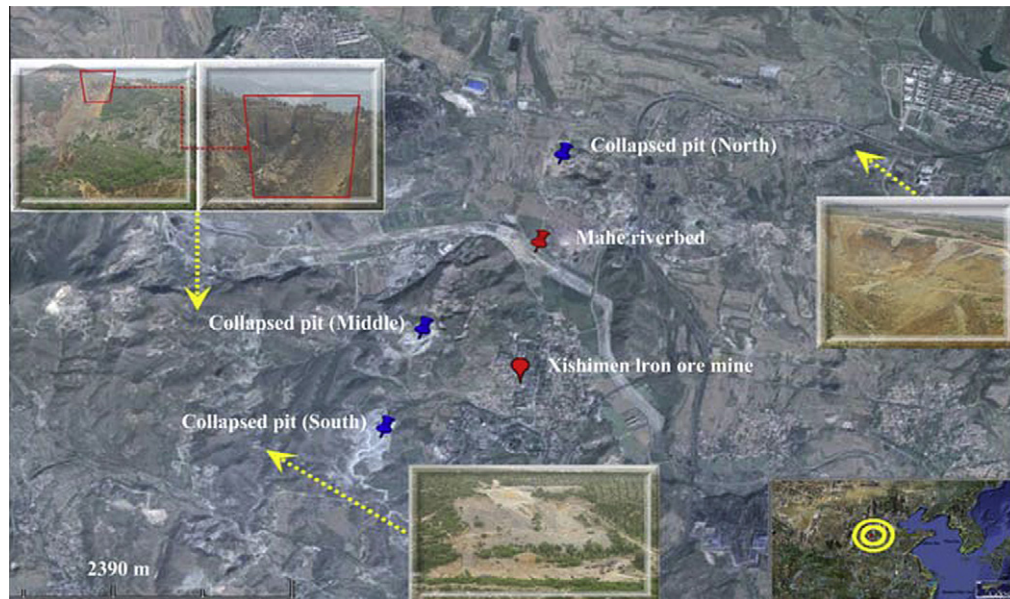


Fig. 1. Location of the Xishimen Iron Ore Mine and the distribution of collapsed pits.

Table 1  
PALSAR interferometry data.

Date	Track	Frame	Heading	Polarization	Center lat	Center lon	Look angle	RSR
14/06/2007	453	73	A	HH	36.907714	114.118595	34.3	16
30/07/2007	453	73	A	HH	36.909423	114.125156	34.3	16
14/09/2007	453	73	A	HH	36.910152	114.12994	34.3	16
15/12/2007	453	73	A	HH	36.906573	114.144811	34.3	32
30/01/2008	453	73	A	HH	36.910069	114.146878	34.3	32
01/05/2008	453	73	A	HH	36.911305	114.150053	34.3	16
16/06/2008	453	73	A	HH	36.934061	114.051312	34.3	16
17/12/2008	453	73	A	HH	36.906774	114.102173	34.3	32
01/02/2009	453	73	A	HH	36.905699	114.107765	34.3	32
20/12/2009	453	73	A	HH	36.904281	114.120356	34.3	32

Table 2  
ALOS repeat-pass interferometric pairs.

Pair No.	Master (date)	Slave (date)	Temporal baseline (day)	Perpendicular baseline (m)
1	15/12/2007	30/01/2008	46	353.16
2	17/12/2008	01/02/2009	46	526.91
3	01/02/2009	20/12/2009	322	1684.11

a compact structure. The ore body is mainly original magnetite with an average ore grade of 43.26%. The configuration that exists in the contacting cingulum, composed of limestone of the middle Ordovician period and corroded diorite, is complex. The majority of the roof of the ore body is limestone and the foot wall is corroded diorite. Due to the characteristics of skarn, which is low strength and easily softened by water, the stability of the surface and the protection of the environment is a serious issue at the Xishimen Iron Ore Mine [10].

The mining area is divided into three areas, the north, the middle, and the south, based on the location on a geographical map. Three huge collapsed pits were formed in each mining area due to the long term underground activities (Fig. 1). The volume of the northern collapsed pit is about 7 million m<sup>3</sup> in a shape that is approximately square: 300 m North–South by 270 m East–West by 90 m average depth. The middle collapsed pit is one of the biggest areas that should be filled by mixed material or gravel in a

quantity of nearly 8 million m<sup>3</sup>. Here the average depth of the back fill is 80 m. The southern collapsed pit consists of several small pits and fractures of the Earth's surface.

Generally, the collapsed pits formed by underground mining activity are permitted. The deformed region will be estimated prior to proper exploitation. However, in recent years, disorganized small local small mines driven by short term interests have aggravated the area covered by deformation. The area now already exceeds the original boundary of the collapsed pits.

In addition to these collapsed pits the surface deformations beyond the limits of the large scale surface deformations have had an effect on portions of the Mahe riverbed. The Mahe crosses the mining area and is a seasonal river. A nearly 200 m wide safety pillar exists under the river bed protected from underground mining. Unfortunately, riverbed subsidence induced by destroying this safety pillar during illegal mining activity over the past few years

Download English Version:

<https://daneshyari.com/en/article/294451>

Download Persian Version:

<https://daneshyari.com/article/294451>

[Daneshyari.com](https://daneshyari.com)