



# Relationship between nutrient pollutants and suspended sediments in upper reaches of Yangtze River

Xiao-qing Wang\*, Zhao-cun Liu, Ji-lun Miao, Ning Zuo

Southwest Research Institute of Water Transport Engineering, Chongqing Jiaotong University, Chongqing 400016, PR China

Received 24 December 2013; accepted 5 January 2015

Available online 15 April 2015

## Abstract

In order to study the relationship between nutrient pollutants and suspended sediments (SS) in the upper reaches of the Yangtze River and two tributaries, water samples were collected from September 1, 2010 to September 30, 2011 at the Zhutuo, Cuntang, Beibei, Wulong, Qingxichang, Wanxian, and Fengjie cross-sections. In the laboratory, the SS concentration and the concentration of SS whose particle size was smaller than 0.02 mm were measured. The phosphorus (P), nitrogen (N), and permanganate index (COD<sub>Mn</sub>) concentrations in the natural water sample, the settled water sample, and two types of filtered water samples obtained through filter membranes with pore sizes of 0.02 mm and 0.45 μm were monitored synchronously. The results show that there are strong relationships between the P and COD<sub>Mn</sub> concentrations and the SS concentration. P mainly exists in particulate form, while N mainly exists in dissolved form. SS whose particle size is smaller than 0.02 mm accounts for a high proportion of sediments in the Yangtze River and has a strong effect on water quality. At the seven cross-sections, the amounts of P, N, and COD<sub>Mn</sub> in particulate form in the wet season are higher than in the dry season and the adsorption amounts of P, N, and COD<sub>Mn</sub> per unit mass of sediment are higher in the dry season than in the wet season.

© 2015 Hohai University. Production and hosting by Elsevier B.V. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

**Keywords:** Suspended sediment; Phosphorus; Nitrogen; Permanganate index

## 1. Introduction

Sediment particles play an important role in water quality (Lopez et al., 1996). The Yangtze River is the third longest river and the Yangtze River Basin is the ninth largest catchment in the world. The discharge of the Yangtze River is the largest to the Western Pacific Ocean and the fifth largest in the world, and its sediment load is the fourth largest in the world. Sediment particles originating from soil loss in the upper reaches of the Yangtze River have been estimated to exceed 40 million tons annually (Shi et al., 1992). The adsorption

behaviour of pollutants on sediments has attracted significant interest in recent years (Kan et al., 1998; Chiou et al., 1998; Kile et al., 1999; Westall et al., 1999; Liu et al., 2001, 2008; Zhao et al., 2001). Some studies have focused on the relationship between phosphorus (P) and sediment in coastal areas (Zhou et al., 2005; Wang et al., 2009a, 2009b; Cao et al., 2011). Others have focused on the relationship between nitrogen (N) and sediment in the field and in laboratory experiments (Sfriso and Marcomini, 1999; Stimson and Larned, 2000; Gardner et al., 2001; Lü et al., 2005). P and N have been identified as limiting nutrient factors for eutrophication in water (Ryther and Dunstan, 1971; Bizsel and Uslu, 2000). A large amount of monitoring work has been conducted to investigate changes in P and N concentrations and loads in other water bodies (Bowes and House, 2001; Sigua and Tweedale, 2003; Bowes et al., 2003; Salvia Castellví et al., 2005; Quilbe et al., 2006; Kangur and Mols, 2008). These studies indicate that there are different relationships between

This work was supported by the Chongqing Education Foundation (Grant No. KJ1400324) and the Advanced Research Project of Chongqing Science and Technology Commission (Grant No. cstc2013cyjA20013).

\* Corresponding author.

E-mail address: [xiaoqingwang2002@hotmail.com](mailto:xiaoqingwang2002@hotmail.com) (Xiao-qing Wang).

Peer review under responsibility of Hohai University.

<http://dx.doi.org/10.1016/j.wse.2015.04.003>

1674-2370/© 2015 Hohai University. Production and hosting by Elsevier B.V. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

nutrient pollutant concentrations and the suspended sediments (SS) concentration in different water bodies.

The aim of this study was to determine the relationship between nutrient pollutants and SS in the upper reaches of the Yangtze River, as well as to determine how sediment adsorption affects the concentrations of nutrient pollutants in the water by synchronously monitoring P, N,  $\text{COD}_{\text{Mn}}$ , and SS concentrations.

## 2. Materials and methods

### 2.1. Field sampling and monitoring

The study area is shown in Fig. 1. It includes the Yangtze River and two important tributaries, the Jialing River and the Wujiang River, the inflow discharge of which accounts for 90% of the total inflow discharge from all tributaries. The study area is divided into three reaches: (1) the first reach is between the Zhutuo cross-section and the Fengjie cross-section in the Yangtze River, and includes five monitoring cross-sections (the Zhutuo, Cuntang, Qingxichang, Wanxian, and Fengjie cross-sections), of which four have monitoring stations (the Zhutuo, Cuntang, Qingxichang, and Wanxian cross-sections); (2) the second reach is between the Wulong cross-section in the Wujiang River and the Wujiang Estuary, and includes one monitoring station at the cross-section; and (3) the third reach is between the Beibei cross-section in the Jialing River and the Jialing Estuary, and includes one monitoring station at the cross-section.

The Water Environmental Monitoring Center in the upper reaches of the Yangtze River monitored the concentrations of nutrient pollutants and SS synchronously from September 1, 2010 to September 30, 2011 once per month. Water samples were collected using horizontal water samplers at seven cross-sections. At each cross-section, three sampling verticals were set, one 50 m from the left bank, one in the middle of the river, and one 50 m from the right bank. There were three sampling sites on each sampling vertical, one 0.5 m below the water surface, one in the middle of the water depth, and one 0.5 m above the river bed. One-thousand mL water was taken from every sampling site, and a total of 9 000 mL of mixed water

was collected as one water sample. Two of the same water samples were collected at each cross-section. One was for water quality measurement, and the other was for sediment measurement. In addition, discharge data were collected during the test period from Water Environment Monitoring Center gauging stations.

### 2.2. Sample treatment and measurement

There were 182 water samples collected from seven cross-sections in the upper reaches of the Yangtze River. After the water samples were transferred to the laboratory, they were stored in refrigerators until measurements were taken. Ninety-one water samples for sediment measurement were used to measure the SS concentration and the concentration of SS whose particle size was smaller than 0.02 mm. Each of the other 91 water samples was treated to obtain four different types of water samples: natural water samples, settled water samples, and two types of filtered water samples. The natural water sample was the original water sample from the river. The settled water sample was obtained by removing deposited particles from the original water sample after it was placed and after it remained static for half an hour. The filtered water sample A was obtained by removing sediment particles from the original water sample through filter membranes with a pore size of 0.02 mm and the filtered water sample B was obtained by removing sediment particles from the original water sample through filter membranes with a pore size of 0.45  $\mu\text{m}$ . The natural water sample was used to measure the concentrations of total phosphorus (TP), total nitrogen (TN), and total  $\text{COD}_{\text{Mn}}$ . The filtered water sample B was used to measure the concentrations of dissolved phosphorus (DP), dissolved nitrogen (DN), and dissolved  $\text{COD}_{\text{Mn}}$ . The concentrations of P, N, and  $\text{COD}_{\text{Mn}}$  in particulate form were obtained by subtracting the dissolved pollutant concentrations from the total pollutant concentrations. The settled water sample was used to measure the pollutant concentrations, except for those absorbed on the deposited particles. The filtered water sample A was used to measure the pollutant concentrations in dissolved form and the portion absorbed on SS whose particle size was smaller than 0.02 mm. The adsorption amounts of P,

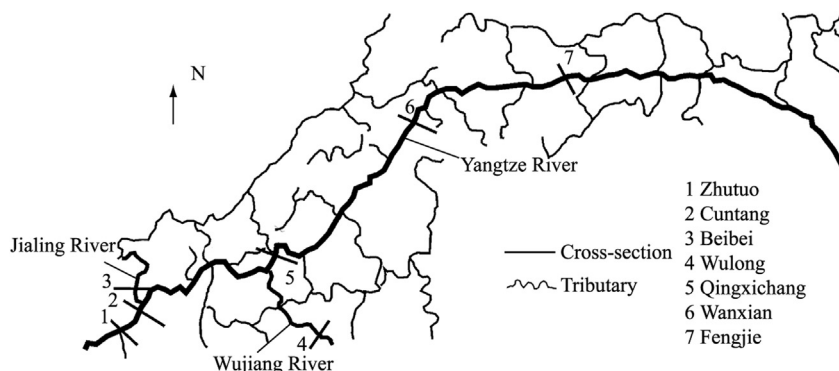


Fig. 1. Study area and cross-sections.

Download English Version:

<https://daneshyari.com/en/article/311430>

Download Persian Version:

<https://daneshyari.com/article/311430>

[Daneshyari.com](https://daneshyari.com)