

# Catchment-scale (dis)connectivity in sediment flux in the upper Hunter catchment, New South Wales, Australia

Kirstie A. Fryirs<sup>a,\*</sup>, Gary J. Brierley<sup>b</sup>, Nicholas J. Preston<sup>c</sup>, John Spencer<sup>a</sup>

<sup>a</sup> Department of Physical Geography, Macquarie University, North Ryde, NSW 2109, Australia

<sup>b</sup> School of Geography and Environmental Science, University of Auckland, Box 92019, New Zealand

<sup>c</sup> Institute of Geography, School of Earth Sciences, Victoria University of Wellington, Box 600, Wellington, New Zealand

Received 10 May 2005; received in revised form 3 January 2006; accepted 3 January 2006

Available online 24 July 2006

## Abstract

(Dis)connectivity within and between landscape compartments affects the extent and rate of transfer of energy and matter through catchments. Various landforms may impede sediment conveyance in a river system, whether laterally to the channel (termed buffers) or longitudinally along the channel itself (termed barriers). A generic approach to analysis of landscape (dis)connectivity using slope threshold analysis in GIS, tied to air photograph interpretation and field mapping of buffers and barriers, is tested in the upper Hunter catchment, Australia. Under simulated conditions, effective catchment area, which is a measure of the proportion of a catchment that has the potential to contribute sediment to the channel network, varies from 73% to just 3% of the total catchment area for differing subcatchments in the upper Hunter. This variability can be explained by the spatial distribution and assemblage of buffers and barriers in each subcatchment. Multiple forms of disconnectivity are evident in some subcatchments, such that when one buffer or barrier is breached, other features still impede sediment transfer within the system. The importance of the position of buffers and barriers within any given subcatchment is emphasised. Spatial variability in valley width exerts a critical control on catchment connectivity, with more efficient sediment conveyance in narrow valleys relative to wider valleys characterised by piedmonts, terraces, fans and extensive floodplains in which conveyance is impeded. This variability reflects the landscape history and geological setting of each subcatchment. The framework developed in this paper can be used to assess the impact of natural or human-induced buffers and barriers on catchment-scale sediment flux in any landscape setting, providing a physical template atop which other biogeochemical fluxes could be examined.

© 2006 Elsevier B.V. All rights reserved.

**Keywords:** Disconnectivity; Coupling; Sediment flux; Buffers; Barriers; Landscape history; GIS; Hunter catchment; Australia

## 1. Introduction

Sediment flux within river systems has been described as a ‘jerky conveyor belt’ (Schumm, 1977; Kondolf, 1994). While this conceptualisation has been framed in

terms of variability in flow energy which determines the capacity of the system to transport sediment along the channel network, due regard must also be given to the availability and delivery of sediment into the channel network, as this drives the propagation of disturbance responses through a catchment (Brierley and Fryirs, 2005). These relationships vary in different landscape settings, reflecting the perennial/ephemeral nature of the flow regime, controls on sediment availability (e.g.

\* Corresponding author. Tel.: +61 2 9850 8367; fax: +61 2 9850 8420.

E-mail address: [kfryirs@els.mq.edu.au](mailto:kfryirs@els.mq.edu.au) (K.A. Fryirs).

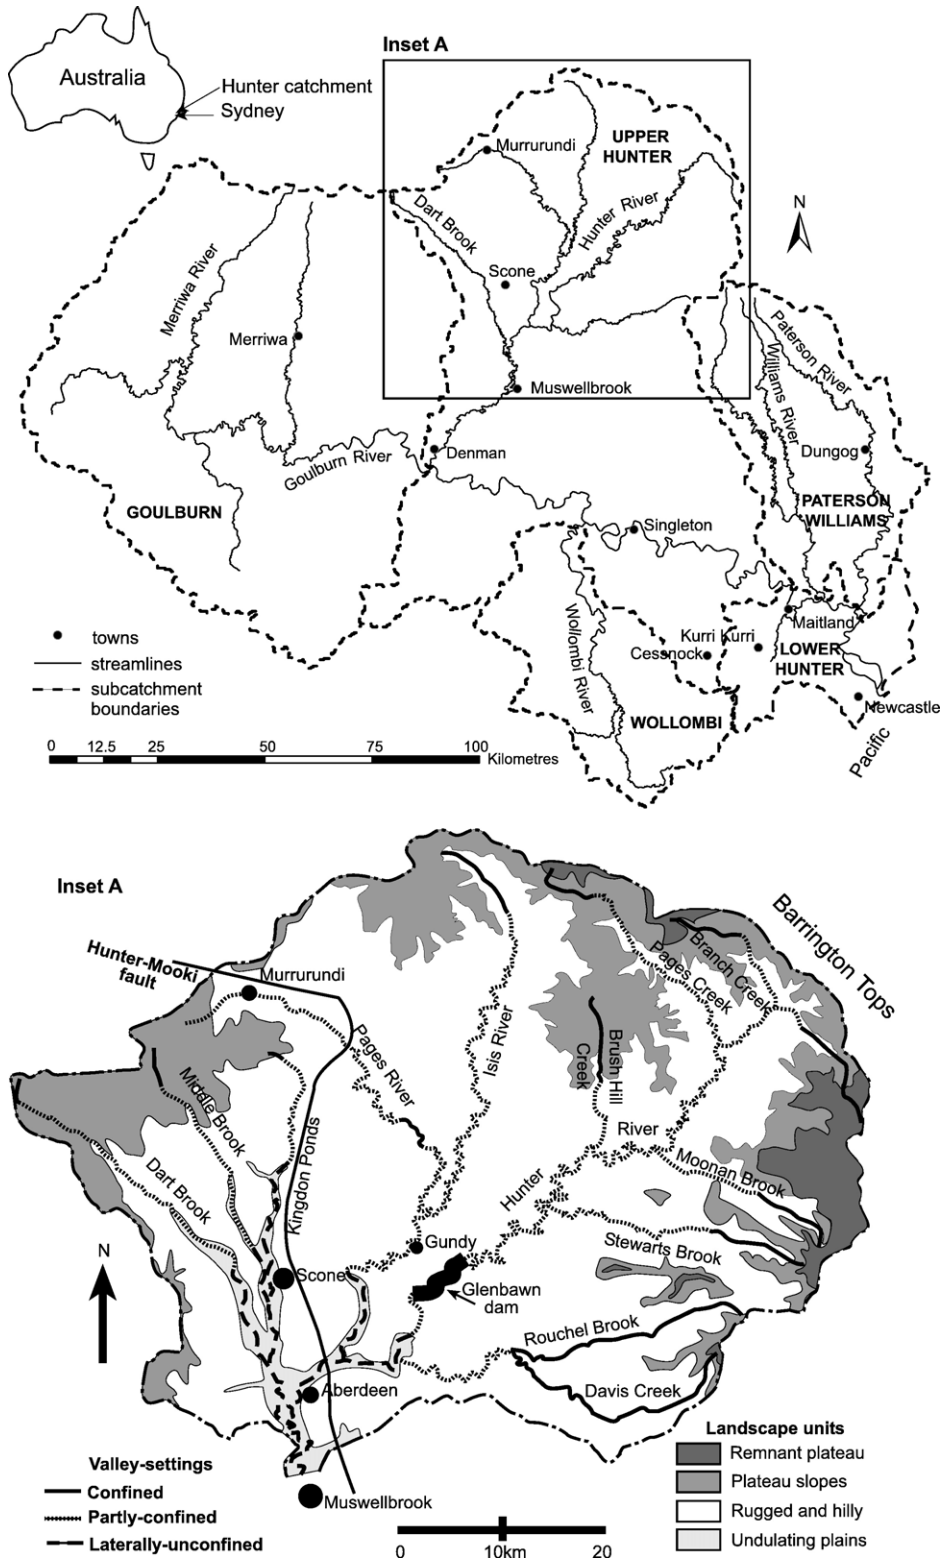


Fig. 1. Location of the upper Hunter catchment within the Hunter catchment.

Download English Version:

<https://daneshyari.com/en/article/4687439>

Download Persian Version:

<https://daneshyari.com/article/4687439>

[Daneshyari.com](https://daneshyari.com)