

Accepted Manuscript

Heat transfer performance assessment of hybrid nanofluids in a parallel channel under identical pumping power

Chen Yang, Xiaowei Wu, Yongkun Zheng, Ting Qiu


PII: S0009-2509(17)30290-7
DOI: <http://dx.doi.org/10.1016/j.ces.2017.04.045>
Reference: CES 13579

To appear in: *Chemical Engineering Science*

Received Date: 7 February 2017
Revised Date: 20 April 2017
Accepted Date: 24 April 2017

Please cite this article as: C. Yang, X. Wu, Y. Zheng, T. Qiu, Heat transfer performance assessment of hybrid nanofluids in a parallel channel under identical pumping power, *Chemical Engineering Science* (2017), doi: <http://dx.doi.org/10.1016/j.ces.2017.04.045>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

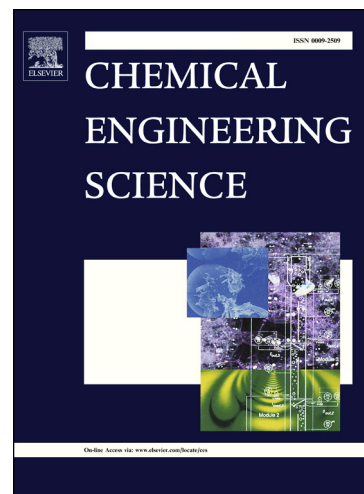

**Heat transfer performance assessment of hybrid nanofluids in a parallel channel
under identical pumping power**

Chen Yang^{*}, Xiaowei Wu, Yongkun Zheng, Ting Qiu^{*}

Correspondence: cyang@fzu.edu.cn (C. Yang); tingqiu@fzu.edu.cn (T. Qiu)

College of Chemical Engineering, Fuzhou University, Fuzhou 350116, China

Abstract

In the study, a mathematical model of hybrid nanofluids was established with the consideration of nanoparticles migration, which has significant influence on the thermophysical properties of hybrid nanofluids. In order to investigate heat transfer and friction factor characteristics of hybrid nanofluids in a channel, the corresponding governing equations were solved by using the Runge-Kutta-Gill method. A Performance Evaluation Criteria (*PEC*) was used to assess heat transfer performance of hybrid nanofluids under identical pumping power. Two hybrid nanofluids, which are alumina-titania/water nanofluid and alumina-zirconia/water nanofluid, respectively, were discussed. The results clearly indicated that alumina-titania/water nanofluid exhibits higher Nusselt number and lower friction factor than alumina-zirconia/water nanofluid. Moreover, it has been found that with the variation of volume fraction ratio of two single-particle nanofluids, maximum *PEC* values of alumina-titania/water nanofluid were observed, proving that alumina-titania/water nanofluid has better heat transfer performance than either alumina/water nanofluid or titania/water nanofluid under identical pumping power. The effects of N_{BT1} variation and N_{BT2} variation of alumina-titania/water nanofluid on Nusselt number

Download English Version:

<https://daneshyari.com/en/article/4763949>

Download Persian Version:

<https://daneshyari.com/article/4763949>

[Daneshyari.com](https://daneshyari.com)