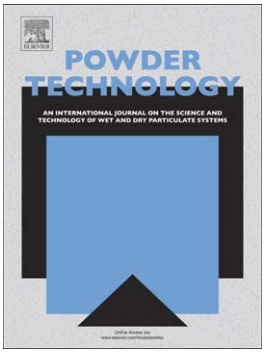

Performance prediction of riser termination devices using Barracuda ®

Madhusudhan Kodam, Ben J. Freireich, Matthew T. Pretz, Brien A. Stears

PII: S0032-5910(17)30243-7
DOI: doi:10.1016/j.powtec.2017.03.028
Reference: PTEC 12433

To appear in: *Powder Technology*

Received date: 6 July 2016
Revised date: 6 March 2017
Accepted date: 8 March 2017

Please cite this article as: Madhusudhan Kodam, Ben J. Freireich, Matthew T. Pretz, Brien A. Stears, Performance prediction of riser termination devices using Barracuda®, *Powder Technology* (2017), doi:10.1016/j.powtec.2017.03.028

Performance prediction of riser termination devices using Barracuda®

Madhusudhan Kodam[a]*, Ben J. Freireich[a], Matthew T. Pretz[b] and Brien A. Stears[b]

[a]The Dow Chemical Company, Core R&D – Solids Processing;

The Dow Chemical Company, Building 1319, Midland MI 48667

[b]The Dow Chemical Company, Hydrocarbons R&D;

The Dow Chemical Company, B-251, Freeport TX 77541

* T: +1-989-633-1134; F:+1-989-636-4616; E: mkodam@dow.com

®Registered trademark of CPFD Software LLC.