



Water evaporation in parallel plates



Shu Soma, Tomoaki Kunugi*

Department of Nuclear Engineering, Kyoto University, Kyoto-Daigaku Katsura, Nishikyo-ku, Kyoto 615-8540, Japan

ARTICLE INFO

Article history:

Received 14 November 2016

Received in revised form 24 February 2017

Accepted 23 March 2017

Keywords:

Evaporation

Meniscus

Curvature

Contact line

ABSTRACT

The influence of macroscopic curvature on evaporation of the meniscus between parallel glass plates standing on purified water pool has been quantified experimentally. The gap distance between the plates was short compared to the capillary length, so the surface curvature increased with decrease of the gap distance. The meniscus was not heated and the thermal relaxation time of the plates estimated to be small. The evaporation rate and flux, obtained from time-evolution of vapor pressure in an experimental enclosure, could increase with increase of the curvature between the plates. Based on the comparison among the existing data including ours, it was clear the evaporation rate and flux could be organized by a curvature, not a perimeter (a contact-line length).

© 2017 Elsevier Ltd. All rights reserved.

1. Introduction

The thermal-hydraulic characteristics accompanying the phase change phenomena in a micro-channel are of interest due to the higher heat-transfer augmentation and applicability to the micro-scale cooling devices. If we can assume that liquid wets solid wall perfectly, liquid film near a contact line can be divided into three regions characterized by two different forces: a disjoining pressure and a capillary force. The macroscopic region of a meniscus, which is called an “intrinsic meniscus” [1] or “macro region” [2], is defined by both an apparent contact angle and a macroscopic curvature, and the capillary force due to the macroscopic curvature is dominant in there. The perfectly wetted solid wall is covered by a very thin liquid layer at thermodynamically equilibrium, so-called an “equilibrium thin film”, where water could not evaporate due to the dispersion force between the liquid molecules and the atoms of wall material. The interface pressure which deviates from the saturation one due to the intermolecular force is called the disjoining pressure. The disjoining pressure is inversely proportional to the cube of the film thickness in the case of planer film [3,4]. A transition region between the macro region and the equilibrium thin film is called a “micro region” [2,5]. The effect of disjoining pressure is weak and the thermal resistance to heat conduction is so small [6], so the evaporation is high at this region. These divided regions are often applied to the scene of the nucleate boiling. In this case, as well as the evaporation of the meniscus, the contact line may play an important role for the heat transport from the

heating wall to the vapor-liquid interface, called a “microlayer” [7]. In addition, the micro region also appears at the scene of the evaporation of liquid droplet which partially or completely wets the substrate [8]. Therefore, it is important to understand the hidden fundamental physics behind such phenomena for further improvements of the engineering design of the evaporator etc. as well as the theoretical and numerical models which predict heat and mass transfer in two-phase systems.

While the macroscopic curvature of the interface at the macro region is regarded as an inverse of the radius of the system (i.e., an inner radius of the channel, a distance of the gap, etc.), the curvature varies near the contact line due to the existence of the equilibrium thin film. The phase change phenomena is strongly dependent on the curvature of the interface from the point of view of the thermodynamics [9–11] and the heat and mass transport process near the contact line. It was reported that the pressure gradient due to the change of the meniscus shape could be sufficient to suck the liquid required for evaporation [1]. The liquid flow was driven by the capillary pressure gradient and the disjoining pressure gradient. In order to describe the heat flow from the superheated wall to the evaporating meniscus, two independent models were presented [12]: one was derived from the heat conduction equation, and the other was from the free boundary problem. The heat transfer coefficient in the liquid film could be derived from Hertz-Knudsen-Schrage equation [13], where the gradient of the disjoining pressure was assumed to be sufficient to suck the liquid. The models of the evaporating meniscus using the modified Young-Laplace equation have been proposed by many researchers [14–20], on the other hand the dynamics of the triple contact line has not been clear in those models because they assumed a static

* Corresponding author.

E-mail address: kunugi@nucleng.kyoto-u.ac.jp (T. Kunugi).

meniscus. It was pointed out in [15] that those models were deficient in the three-phase interaction at the contact line. The experimental studies on the evaporation of the liquid in the mouse of the funnel [21–23] and capillary tubes [24–28] were reviewed in [29]. It was discussed that the thermocapillary convection could occur underneath the interface driven by the evaporation. The evaporation rate and flux from the meniscus of the volatile liquid in the capillary tubes of various diameters were obtained [24], and also the temperature distributions at the outer surface of the capillary tubes were measured by an IR camera [25]. It was found that the evaporation rate linearly decreased and the flux increased as the diameter decreased. They argued that this trend confirmed that the evaporation from the micro region was large, and suggested that the linearity of the evaporation rate with the tube diameter was due to the variation of the contact-line length. Based on the IR measurements, they also showed that the smaller tube diameter led the stronger evaporation.

In this paper, the influence of the macroscopic curvature on the evaporation rate of water from the meniscus was investigated. In the previous experiments conducted by using capillary tubes [24], they could not evaluate individually the effect of the curvature and that of the contact-line length on the evaporation. This is because they changed the tube diameter, i.e., the contact-line length and the macroscopic curvature were simultaneously changed. The evaporation rate and flux could be affected by the macroscopic curvature of the meniscus, however, there is no experimental study on how much the curvature of the meniscus influences the evaporation rate in detail. Moreover, there are few experimental studies on the evaporation rate and flux from the meniscus in the vertically standing parallel plates, not the tubes, as far as we know. In addition, many studies have not investigated water, so the data acquisition of the water evaporation is not sufficient till today. In this study, therefore, two parallel glass plates were used to evaluate individually the effect of the curvature and that of the contact-line length, and the purified water was chosen as a working fluid. The influence of the macroscopic curvature on the evaporation rate of water at the meniscus was discussed.

2. Experimental apparatus and procedure

Evaporation rates, evaporation fluxes and contact angles of the meniscus between two glass plates have been experimentally obtained. The test section as shown in Fig. 1(a) consisted of two glass plates as the test plate and two Polystyrene transparent plates as the edge-plate standing on a cylindrical pool filled with a purified water. The size of the glass plate was the width of 26 mm, height of 76 mm and the thickness of 1.0 mm. In the exper-

iment, the gap distance between the parallel glass plates was adjusted by a thickness gauge of 0.30–1.50 mm. In other words, the macroscopic curvature of the meniscus was controlled. While the macroscopic curvature could be set to the desired value, the variation of the perimeter of the gap was so small (only a few% of it) in this study, compared to the previous studies using the tubes as the test section. Therefore, the effect of the curvature and that of the contact-line length were evaluated individually.

Prior to the experiments, the oil molecules adsorbed on the glass plates were wiped out by using ethanol, rinsed by the purified water, and then dried. The thickness gauge was inserted into the gap between the glass plates to adjust the gap distance. This test section was installed and stabilized in the cylindrical pool which was cleaned by ethanol and rinsed by the purified water. The purified water was poured to the pool gently, and then water rose up to its equilibrium position in the gap between the glass plates due to the capillary force. The purified water poured into the pool was boiled in order to degas and then was cooled to the room temperature, which was kept at 295 ± 1 K. After pouring the purified water, the nonvolatile oil (rapeseed oil) was poured on the water pool to prevent the evaporation of the water surface. The oil was kept from coming into the meniscus. The test section has no internal/external heater. This test section was installed in an acrylic transparent enclosure covered with the thermal insulator, so the system was thermally isolated from the outside environment. The enclosure was connected to an auxiliary tank for the evacuation of air from the enclosure by a vacuum pump as shown in Fig. 1(b). After evacuating air from the tank and setting the desired pressure to it, the connecting valve was opened, and the pressure between the enclosure and the tank was equalized. After the equalization, the increase of the pressure in the enclosure caused by the evaporation from the meniscus was measured by a differential pressure gauge. The output of the differential pressure gauge (KEYENCE Corp.) was logged by the data logger (KEYENCE Corp.). The evaporation rate was evaluated by the time-evolution of the differential pressure. In order to quantify the evaporation rate, the evaporation process was assumed as a diffusion phenomenon, and a kind of solution of the diffusion equation was used as a correlation function:

$$f(t) = a \times \operatorname{erfc}(b/\sqrt{t}). \quad (1)$$

Here, a (Pa) and b ($\text{min}^{1/2}$) are fitting parameters. t (min) is time period after the reference time. In this study, the pressure time-evolution data at 1 min after the start of the equalization in the enclosure were used for getting the correlation. In this sense, this point was set to the initial point for getting the correlation. The pressure data were correlated by Eq. (1), as shown in Fig. 2(a). The parameters (a and b) were used to obtain the evaporation rate through the time-differentiation of Eq. (1):

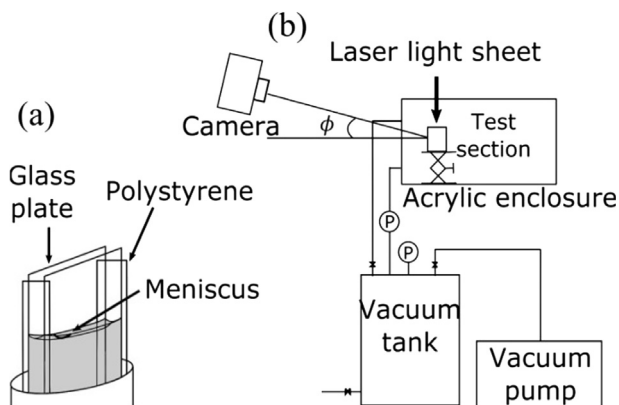


Fig. 1. (a) Test section. (b) Experimental apparatus.

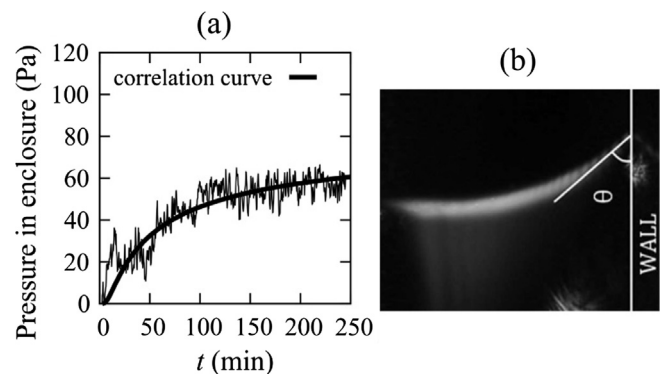


Fig. 2. (a) Time-evolution of differential pressure. (b) Image of meniscus.

Download English Version:

<https://daneshyari.com/en/article/4993607>

Download Persian Version:

<https://daneshyari.com/article/4993607>

[Daneshyari.com](https://daneshyari.com)