



# Reduction of diphenylacetylene using Al powder in the presence of noble metal catalysts in water



Ummey Rayhan<sup>a,b</sup>, Zannatul Kowser<sup>a</sup>, Carl Redshaw<sup>c</sup>, Takehiko Yamato<sup>a,\*</sup>

<sup>a</sup> Department of Applied Chemistry, Faculty of Science and Engineering, Saga University, Honjo-machi 1, Saga 840-8502, Japan

<sup>b</sup> Department of Chemistry, Dhaka University of Engineering and Technology, Gazipur 1700, Bangladesh

<sup>c</sup> Department of Chemistry, The University of Hull, Cottingham Road, Hull, Yorkshire HU6 7RX, UK

## ARTICLE INFO

### Article history:

Received 28 June 2016

Received in revised form 6 September 2016

Accepted 11 September 2016

Available online 14 September 2016

### Keywords:

Reduction of diphenylacetylene

Noble metal catalyst

Al powder

Water

Cyclohexane ring

## ABSTRACT

Diphenylacetylenes can be reduced to the corresponding diphenylethanes (**2**) in water in excellent yield using Al powder and Pd/C at 60 °C for 3 h in a sealed tube. In addition, the complete reduction of both aromatic rings required 80 °C for 15 h with Al powder in the presence of Pt/C. However, the nature of hydrogenated product formed was found to be strongly influenced by the reaction temperature, time, volume of water and the amount of catalyst being employed.

© 2016 Elsevier Ltd. All rights reserved.

## 1. Introduction

Hydrogenation of aromatic alkynes to the corresponding alkenes and alkanes is of great interest in synthetic organic chemistry. This is one of the most widely used chemical reactions with many industrial applications in the petro, food and pharmaceutical industries. Styrene is an industrially and commercially valuable material. Phenylacetylene reduced by semi-hydrogenation is a process of great industrial importance<sup>1,2</sup> because phenylacetylene is a poisoning impurity in styrene feedstocks, and leads to deactivation of the styrene polymerization catalyst. The hydrogenation of phenylacetylene proceeds under relatively mild conditions and the desired product is the intermediate (styrene). Thus, this methodology is a very convenient tool for the evaluation of process design<sup>2,3</sup> and testing the efficiency of hydrogenation catalysts.<sup>4–7</sup> This is why a substantial amount of literature is available featuring both homogeneous<sup>8–10</sup> and heterogeneous<sup>11–17</sup> selective processes for the semi-hydrogenation of alkynes.

Catalytic hydrogenation using hydrogen gas or hydride transfer agents is commonly employed for this transformation. Various hydrogenation reactions have been studied, for which the active catalysts commonly employed include systems based on the metals

Pd,<sup>18–20</sup> Rh,<sup>21,22</sup> Ru,<sup>23–25</sup> Ni,<sup>26</sup> Pt,<sup>27,28</sup> Ir,<sup>29</sup> Os,<sup>30</sup> V,<sup>31</sup> Fe,<sup>32</sup> and Nb.<sup>33</sup> There is particular interest in the use of Pd given its excellent performance in the selective hydrogenation of alkynes.<sup>34</sup> Recently, transition-metal nanoparticles in catalysis have drawn much attention due to their high efficiency and unique properties. Palladium nanoparticles possessing high catalytic activity and controllable particle size have also attracted attention.<sup>35</sup> Moreover, the use of ruthenium nanoparticles for the semi-hydrogenation of alkyne and platinum-ruthenium nanoparticles for the selective hydrogenation of phenylacetylene has been reported.<sup>36,37</sup> The selective reduction of phenylacetylene was also investigated with AlMgO particles which were used as an alternative to water-reactive generator of hydrogen.<sup>38</sup> The partial hydrogenation of 3-hexyne was observed using low-loadings of palladium mono- and bimetallic catalysts.<sup>39</sup> A Hantzsch amido dihydropyridine has been used as a transfer hydrogenation reagent for  $\alpha,\beta$ -unsaturated ketones.<sup>40</sup>

Catalytic hydrogenation is widely considered to be an environmentally benign process and both heterogeneous and homogeneous alternatives are popular in industry.<sup>41–47</sup> Nowadays, heterogeneous catalysts are being used for the selective reduction of condensed *N*-heterocycles using water as both a solvent and a hydrogen source.<sup>48</sup> Based on the application of Raney-type Ni–Al alloy in aqueous medium, the selective reduction of ketones and reductive amination of carbonyl compounds has been reported.<sup>49,50</sup> More recently, the application of a heterogeneous catalyst in


\* Corresponding author. Fax: +81 952 28 8548; e-mail address: [yamatot@cc.saga-u.ac.jp](mailto:yamatot@cc.saga-u.ac.jp) (T. Yamato).

combination with microwave irradiation has been employed as an environmentally benign tool for some contemporary organic synthesis.<sup>51,52</sup>

On the other hand, the utilization of water as a chemical reagent is an essential aspect of Green Chemistry.<sup>53</sup> Water as a solvent for organic reactions has many advantages over the use of other organic solvents including cost, safety, simplicity of operation and most importantly its benign environmental character.<sup>54–56</sup> More recently, water has been used as a stoichiometric H or D atom donor for tetrahydroxydiboron-mediated palladium-catalyzed transfer hydrogenation and deuteration of alkenes and alkynes.<sup>57</sup> In addition, hydrogenations and deuterium labeling has been carried out with Al-based metal alloys under aqueous conditions.<sup>58</sup> Here in this study, we illustrate a simple reduction method for diphenylacetylene using commercially available Al powder in the presence of noble metal catalysts (Pt/C, Pd/C, Ru/C or Rh/C) in water in a sealed tube.

## 2. Results and discussion

In order to achieve a more environmentally friendly chemical process, the reduction of diphenylacetylene (**1a**) was carried out using Al powder in the presence of a noble metal catalyst in water in a sealed tube. Besides the expected product 1,2-diphenylethane (**3a**), a mixture of stilbene (**2a**), cyclohexylphenylethane (**4a**) and 1,2-dicyclohexylethane (**5a**) was obtained upon reduction. The relative distribution of the products formed was found to depend on the reaction conditions employed. Consequently, the effects of the reaction temperature, time, amount of catalyst and required volume of water for the reduction of diphenylacetylene (**1a**) were investigated.

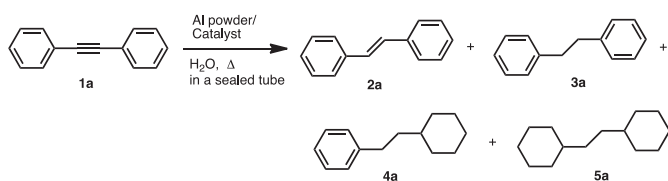

**Scheme 1.** Reduction of diphenylacetylene (**1a**) by using Al powder and noble metal catalyst in H<sub>2</sub>O.

An initial attempt to reduce diphenylacetylene (**1a**) using only Al powder in water in a sealed tube failed. However, when the reduction was carried out using Al powder and Pd/C at 60 °C for 3 h, diphenylethane (**3a**) was isolated in good yield (Table 1, entry 2). On increasing the reaction time, diphenylacetylene (**1a**) gradually underwent further reduction and as a result, the intermediate product (**3a**) was transformed into **4a** over a longer reaction time (Table 1, entry 3).

The reduction of diphenylacetylene (**1a**) was conducted at 60 °C to evaluate the effect of the reaction time at 60 °C using Al powder and Pd/C. When **1a** was subjected to reduction over 3 h, the product

**Table 1**  
Reduction of diphenylacetylene (**1a**) using Al powder and noble metal catalyst in H<sub>2</sub>O<sup>a,b</sup>

Entry	Catalyst	Time (h)	Yield <sup>c</sup> (%) <b>3a</b>	<b>4a</b>	Recovery <b>1a</b>
1	Al Powder+Pt/C	3	20	0	80
2	Al Powder+Pd/C	3	95	0	5
3	Al Powder+Pd/C	6	94	6	0
4	Al Powder	6	0	0	100
5	Ni–Al	3	91	0	9

<sup>a</sup> Substrate: 0.11 mmol, Ni–Al: 100 mg (500 wt %) (Wako), Al powder: 100 mg (500 wt %) (Wako), Catalyst: 4.5 mol % (metal) (Wako), H<sub>2</sub>O: 0.5 mL (Wako).

<sup>b</sup> Conditions: temp: 60 °C.

<sup>c</sup> The yields were determined by GLC.

(**3a**) was found in the highest yield (97%) (Table 2, entry 2). On increasing the reaction time, the amount of the reduction product (**3a**) was not found to increase, rather over a longer reaction time of more than 4 h, the product (**3a**) started to transform into **4a** (Table 2, entry 4).

**Table 2**  
Reduction of diphenylacetylene (**1a**) using Al powder and Pd/C in H<sub>2</sub>O<sup>a,b</sup>

Entry	Time (h)	<b>2a</b>	<b>3a</b>	Yield <sup>c,d</sup> (%) <b>4a</b>	<b>5a</b>	Recovery <b>1a</b>
1	2	0	52	0	0	48
2	3	0	97[84]	0	0	3
3	4	0	100	0	0	0
4	5	0	97	3	0	0

<sup>a</sup> Substrate: 20 mg (0.11 mmol), Al powder: 100 mg (500 wt %), Catalyst: 4.5 mol % (metal), H<sub>2</sub>O: 0.5 mL.

<sup>b</sup> Conditions: temp: 60 °C.


<sup>c</sup> The yields were determined by GLC.

<sup>d</sup> The isolated yields are shown in a square bracket.

It was observed that on increasing the reaction time, the yield of the desired compound (**3a**) was found to peak (97%) at 3 h. On increasing the reaction time further, the amount of product (**3a**) increased only very slightly. On the other hand, using Raney Ni–Al in dilute alkaline aqueous solution, benzophenone required a higher amount of catalyst compared to that used in this work.<sup>59</sup> Thus, the catalytic system developed here is more economical.

From Table 2, it was found that 60 °C for 4 h was the best conditions for the reduction of diphenylacetylene (**1a**) to diphenylethane (**3a**) when using Al powder and Pd/C. To explore the corresponding activity of other catalytic systems, the reduction was carried out under the same condition for 3 h. In the case of Rh/C, we obtained a 27% yield, whilst for Ru/C, no reaction occurred. In Fig. 1, the pink colour indicates the starting compound diphenylacetylenes (DPA), the green colour represents our desired product 1,2-diphenylethane (DPE) and the blue colour for stilbene product.

In our previous study, a Pt/C catalyst with Al powder in water was found to be a stronger reducing agent for the reduction of aromatic rings.<sup>60</sup> Based on this information, the reduction of diphenylacetylene (**1a**) was examined with this catalyst in a sealed tube.

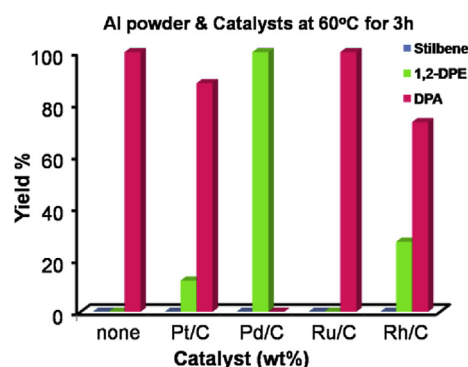

**Fig. 1.** Reduction of diphenylacetylene (**1a**) using Al powder and noble metal catalyst.

When the reduction of diphenylacetylene (**1a**) was carried out at 80 °C for 12 h using a Pt/C catalyst with Al powder in water, 37% of **5a** was observed along with 63% recovery of the starting compound (**1a**) (Table 3, entry 1). The reduction increased on increasing the reaction temperature up to 100 °C, but this temperature is not suitable when water is used as the solvent (Table 3, entry 2). Consequently, when using this catalyst, the reaction temperature was gradually decreased and a 91% yield of compound **5a** was obtained at 80 °C over 15 h. Thus Pt/C turned out to be the best catalyst and it

Download English Version:

<https://daneshyari.com/en/article/5212750>

Download Persian Version:

<https://daneshyari.com/article/5212750>

[Daneshyari.com](https://daneshyari.com)