

Accepted Manuscript

Semi-analytical modeling of anchor loss in plate-mounted resonators

Christoph Schaal, Robert M'Closkey, Ajit Mal

PII: S0041-624X(17)30505-X


DOI: <http://dx.doi.org/10.1016/j.ultras.2017.09.009>

Reference: ULTRAS 5614

To appear in: *Ultrasonics*

Received Date: 2 June 2017

Accepted Date: 10 September 2017

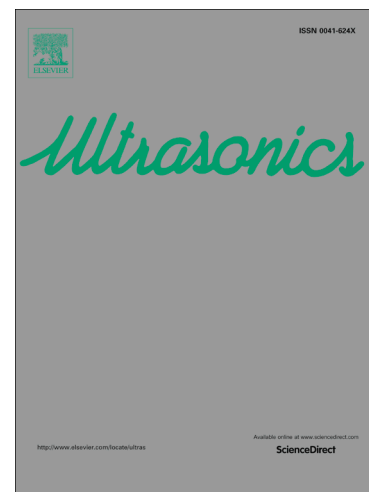

Please cite this article as: C. Schaal, R. M'Closkey, A. Mal, Semi-analytical modeling of anchor loss in plate-mounted resonators, *Ultrasonics* (2017), doi: <http://dx.doi.org/10.1016/j.ultras.2017.09.009>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

Semi-analytical modeling of anchor loss in plate-mounted resonators

Christoph Schaal^{a,b,*}, Robert M'Closkey^b, Ajit Mal^b^aDepartment of Mechanical Engineering, California State University, Northridge, California, USA^bMechanical and Aerospace Engineering Department, University of California, Los Angeles, California, USA

Abstract

A semi-analytical technique for estimating the energy loss in a resonator mounted to an infinite plate substrate is proposed in this paper. In a plate, only Lamb waves have to be considered, leading to a simplified characterization of the energy carried away from a vibrating source on the plate surface. Instead of employing absorbing elements at the boundaries of the plate-resonator finite element model, it is shown how the semi-analytical approach of stitching together analytical Lamb wave expressions to the finite element model can be utilized. The approach is demonstrated for single and double cantilever configurations on a plate. The results have excellent agreement with those of conventional transient finite element simulations.

Keywords: Micro-resonator, anchor loss, Lamb waves, semi-analytical, FEM

1. Introduction

Damping in miniature resonators (e.g. vibratory gyroscopes) is a consequence of many factors and for the designer of such devices it is important to determine the dominant mechanisms that contribute to energy loss [1]. Energy loss in a vibratory gyroscope due to the interaction with the substrate to which it is mounted, commonly termed *anchor loss*, has been widely studied [2–4]. Most treatments, however, have assumed a semi-infinite medium due to the small dimensions of the resonator compared to the substrate thickness [5]. Recently reported high quality factor resonators, though, typically have resonant frequencies from a few kilohertz up to several hundred kilohertz [6–9, 4], and due to the wavelengths involved, the substrate is more accurately treated as a plate, not as a semi-infinite medium. These substrate plates are often made of fused silica or Pyrex glass and can therefore be treated as an isotropic medium [9, 10]. In any case, it is common practice to create a model of the resonator that includes a small segment of the plate with a finite element (FE) software in conjunction with absorbing boundary elements [11, 5]. As an alternative to implementing absorbing boundary elements, semi-analytical methods have been developed in which such elements are replaced by analytical expressions for Lamb waves [12]. By means of a modal superposition of all possible Lamb waves, any displacement and stress field can be represented due to the

*Corresponding author

Download English Version:

<https://daneshyari.com/en/article/5485283>

Download Persian Version:

<https://daneshyari.com/article/5485283>

[Daneshyari.com](https://daneshyari.com)