




Contents lists available at ScienceDirect

## Journal of Magnetism and Magnetic Materials

journal homepage: [www.elsevier.com/locate/jmmm](http://www.elsevier.com/locate/jmmm)

# In-situ observation of particles deposition process on a ferromagnetic filter during high-gradient magnetic separation process

Noriyuki Hirota<sup>a,\*</sup>, Tsutomu Ando<sup>b</sup>, Tadamitsu Takano<sup>b</sup>, Hidehiko Okada<sup>a</sup>

<sup>a</sup> Fine Particle Engineering Group, National Institute for Materials Science, 3-13 Sakura, Tsukuba, Japan

<sup>b</sup> Department of Mechanical Engineering, Nihon University, 1-2-1 Izumicho, Narashino 275-8575, Japan

## ARTICLE INFO

### Keywords:

High gradient magnetic separation  
HGMS  
Ferromagnetic filter  
Magnetic particle deposition  
Magnetization  
Magnetic force

## ABSTRACTS

*In-situ* observations of particles deposition process on a ferromagnetic filter in high gradient magnetic separation were carried out under high magnetic fields to obtain information for the optimization of separation condition. The spike-like deposition structure was observed on the upper stream of the magnetic filter, different from the conventional deposition image obtained for paramagnetic particles. The length of the spike structure tends to be long with lower flow velocity and lower applied magnetic field. It was also observed that the chain structure or the bundle of such chains were formed on the way to the filter under the condition of the low applied magnetic field and low flow rates. Results obtained here indicate that the effect of deposited particles on the spatial distribution of the magnetic field and the hydrodynamics, they are often ignored in the simulation so far, should be considered appropriately.

## 1. Introduction

In high gradient magnetic separation (HGMS), magnetic particles suspended in fluids can be separated efficiently. When a filter consisted of magnetic wires is placed in a magnetic fields, the steep magnetic field gradient will be formed in the vicinity of filter wires. Particles pass through this region attracted on the magnetic filter wires due to the magnetic force acting on particles. Fig. 1 schematically shows spatial distribution of the magnetic force acting on magnetic particles in the vicinity of a magnetic filter wire and Fig. 2 illustrates the image of HGMS process. Different from usual filtration techniques, as seen in Fig. 2, the opening of filters can be much larger than the size of particles because magnetic particles are attracted to magnetic wires due to the magnetic force. Therefore, efficient material separation is realized due to its low pressure loss. Even though the particles accumulated on the filter, the filter can be reused because stacked particles can be removed and collected by removing the magnetic field. This feature seems good for environment. Even if magnetic properties of objective materials are too small they can be separated by attaching or adsorbing on to the surface of magnetic particles. Therefore, wide range of materials can be separated by HGMS. Nowadays, HGMS is applied to the separation of precious materials [1–4], the environmental preservation [5,6], or the treatment of waste water [7], and so on. Efficiency of separation depends on the size and the magnetization of particles, the viscosity and the velocity of fluids, the magnetization

and the diameter of the filter wire, the distance of filter wires, *etc.* To attain efficient separation process, the optimization of separation conditions was carried out through the computer simulation, however, the effect of particles deposited on the surface of filter wires was often ignored when considering the hydrodynamics of fluid and the spatial distribution of magnetic fields around the wire to simplify the calculation [8–11]. Conventionally, the deposition of particles on the filter wire considered only for paramagnetic particles and thought to be occurred in upper stream side of the wire widely piled up manner [12,13] and caused clogging of the filter while in many practical cases ferromagnetic particles separated in HGMS. The possible continuous duration of time of the separation process is affected by the clogging of the filter. This is important factor to consider the efficiency of process when HGMS is applied to some industrial processes. Appropriate consideration of deposited particles seems to be required in the simulation. Therefore, in this study, to obtain information for the optimization of separation condition, *in-situ* observations of particles deposition process on a ferromagnetic filter in HGMS were carried out under high magnetic fields.

## 2. Experimental

In this study, the cryocooler operated type of superconducting magnet, Model JMTD13C100 manufactured by JASTEC Co. Ltd., was used to apply high magnetic fields. This superconducting magnet can

\* Corresponding author.


E-mail address: [hirota.noriyuki@nims.go.jp](mailto:hirota.noriyuki@nims.go.jp) (N. Hirota).

<http://dx.doi.org/10.1016/j.jmmm.2016.11.028>


Received 27 June 2016; Received in revised form 25 October 2016; Accepted 1 November 2016

Available online xxxx


0304-8853/ © 2016 Elsevier B.V. All rights reserved.

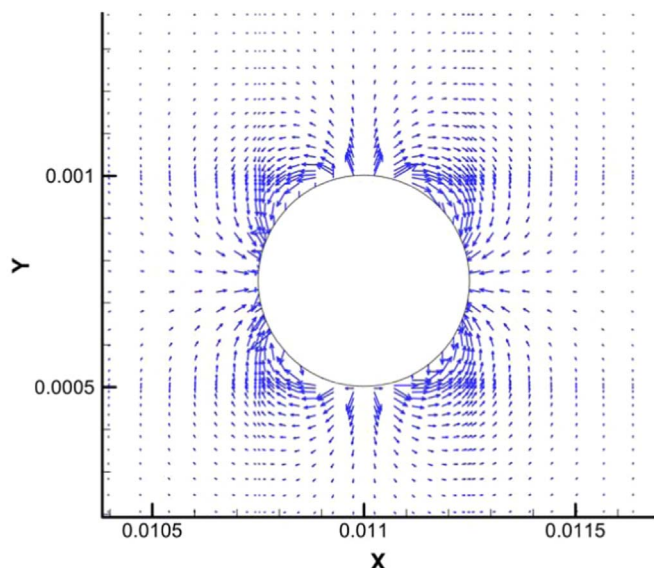

**Fig. 1.** Schematic drawing of the spatial distribution of the magnetic force acting on magnetic particles in the vicinity of a magnetic filter wire in magnetic fields. White large circle represents the cross section of the magnetic wire. The magnetic field applied in a horizontal direction. The direction and the length of arrows correspond to the direction and the intensity of the magnetic force.

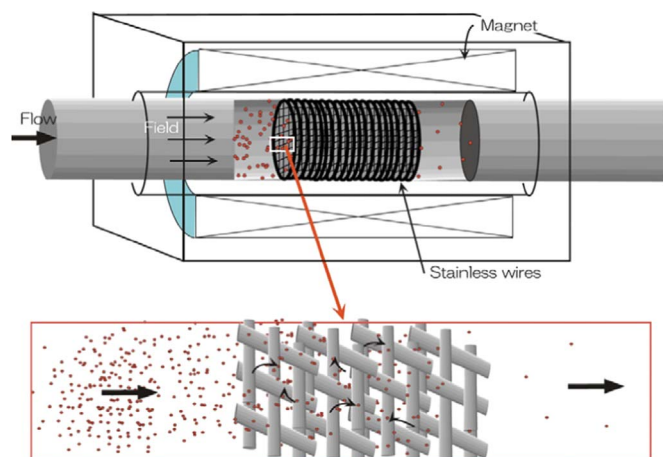

**Fig. 2.** Schematic figure of high gradient magnetic separation process.

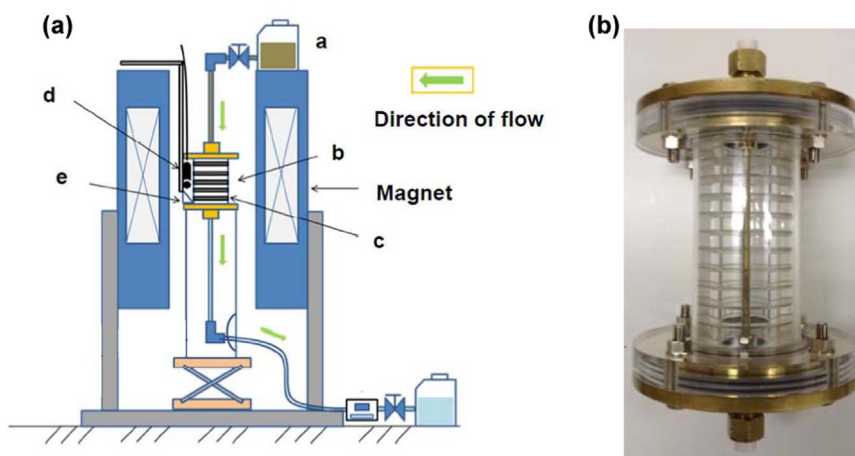

**Fig. 3.** The schematic drawing of experimental setup (a) and the appearance of the filter housing (b). a: sample reservoir, b: magnetic filter, c: filter housing, d: CCD camera, e: mirror.

generate high magnetic fields up to 13 T and has a room-temperature bore of 100 mm in diameter. The schematic drawing of experimental setup and the appearance of the filter housing are shown in Fig. 3(a) and (b), respectively. Magnetic filters used in this study were made of SUS430. The openings of filters used here were 16 meshes and 30 meshes. Whole diameter of these filters was 25 mm and diameters of the filter wires are 0.5 mm and 0.22 mm for 16 meshes and 30 meshes, respectively. The side wall of filter housing was made of acryl to see the inside. A piece of magnetic filter was fixed in this housing and introduced into the bore of the superconducting magnet. The position of the filter was fixed at the magnetic field center. The magnetic particles used here were zirconia ferrite particles manufactured by Japan Metal & Chemical Co., Ltd. The size of this particle was larger than 0.6  $\mu\text{m}$ . The suspension of 0.5 g zirconia ferrite particles in 1 L of distilled water was used as the sample. In the experiment, whole flow channel was filled with distilled water at first, then, the sample suspension was flowed from the sample reservoir placed on the top of the superconducting magnet into the filter housing. The velocity of the sample suspension was controlled using the valve placed at the downstream. Behavior of suspension was observed from the side of the filter using a CCD camera, model UN43H of Elmo Co., Ltd., inserted into the bore of superconducting magnet. Observations were carried out with changing the flow rates and the applied magnetic fields up to 10T.

### 3. Results and discussion

Without magnetic fields, it was confirmed that Zirconia ferrite particles pass through the filter except small amount of particles physically adsorbed on the surface of the filter wires.

Fig. 4 shows the results of particle deposition process when the sample suspension was flowed with the speed of 8.4 ml/s using 16 meshes filter under 0.50 T. Different from the conventional deposition model for paramagnetic particles, the spike-like deposition structure was formed on the upper stream of the filter. It was also observed that the length of the spike was grown up more than 10 mm. In the experiment, the flow rate of the sample suspension was controlled, however, once the sample suspension was introduced into the superconducting magnet bore, particles move much faster than the fluid due to the distribution of background magnetic fields given by the superconducting magnet. The actual meaning of the flow rate control is to control the amount of particles introduced into the filter housing per unit time.

Fig. 5(a) shows a particle deposition observed when the sample suspension was flowed with the speed of 2.5 ml/s using 16 meshes

Download English Version:

<https://daneshyari.com/en/article/5491196>

Download Persian Version:

<https://daneshyari.com/article/5491196>

[Daneshyari.com](https://daneshyari.com)