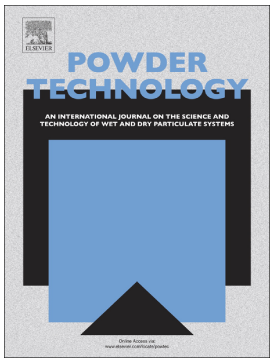

Effect of working pressure, fluid temperature, nozzle type and nozzle orifice size, on spray characteristics using viscous feed additive DL-2-hydroxy-4-(methylthio)-butanoic-acid

I. Gaytan, B. Nicolas, F. Gouriou, J.P. Leru, J. Mallarach

PII: S0032-5910(18)30416-9
DOI: doi:10.1016/j.powtec.2018.05.045
Reference: PTEC 13418

To appear in: *Powder Technology*

Received date: 9 July 2017
Revised date: 27 February 2018
Accepted date: 24 May 2018

Please cite this article as: I. Gaytan, B. Nicolas, F. Gouriou, J.P. Leru, J. Mallarach , Effect of working pressure, fluid temperature, nozzle type and nozzle orifice size, on spray characteristics using viscous feed additive DL-2-hydroxy-4-(methylthio)-butanoic-acid. Powder Technology(2017), doi:10.1016/j.powtec.2018.05.045

Original Research Paper

Effect of working pressure, fluid temperature, nozzle type and nozzle orifice size, on spray characteristics using viscous feed additive DL-2-hydroxy-4-(methylthio)-butanoic-acid

I. Gaytan[a], B. Nicolas[b,*], F. Gouriou[b], J.P. Leru[b], J. Mallarach[c]

[a]*Adisseo France SAS, Technology Development Engineering, 92160, Antony, France*

[b]*Centre d'Etude et de Recherche Technologique en Aérothermique et Moteurs, 76800, Saint Etienne du Rouvray, France*

[c]*Mangra SA, Technical Department, 08560, Manlleu, Barcelona*

[*]Corresponding author. Address: CERTAM, 1, rue Joseph Fourier, 76800, Saint Etienne du Rouvray, France; Phone: +33 2 35 64 37 00; E-mail: baptiste.nicolas@certam-rouen.com