Applied Energy 149 (2015) 13-23

Contents lists available at ScienceDirect

Applied Energy

journal homepage: www.elsevier.com/locate/apenergy

Optimal design of a standalone direct pumping photovoltaic system for deficit irrigation of olive orchards



AppliedEnergy

R. López-Luque^{a,*}, J. Reca^b, J. Martínez^b


^a Department of Applied Physics, University of Córdoba, Room C21E030, Albert Einstein Building, Campus of Rabanales, 14071 Córdoba, Spain ^b Department of Engineering, University of Almería, 04120 Almería, Spain

HIGHLIGHTS

- The new concept called Photovoltaics Opportunity Irrigation (PVOI) is introduced
- A standalone PVOI system is proposed for the irrigation of olive trees.
- A simulation model of a PVOI system is developed to optimize its design.
- The optimal design of the PVOI system was achieved under deficit irrigation.
- The PVOI approach provided reductions in the investment costs and water savings.

G R A P H I C A L A B S T R A C T

Scheme of the proposed PV direct irrigation system.

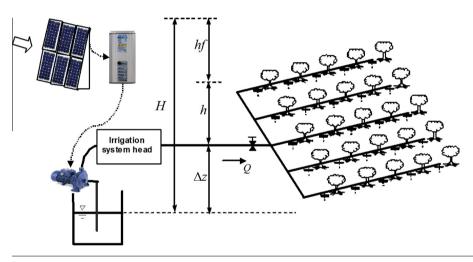

ARTICLE INFO

Article history: Received 9 January 2015 Received in revised form 20 March 2015 Accepted 21 March 2015

Keywords: Photovoltaics Opportunity Irrigation (PVOI) Solar energy Photovoltaic energy Olive orchard Deficit irrigation PV optimal design

ABSTRACT

In this work, an optimal standalone direct pumping photovoltaic irrigation system is proposed for the deficit irrigation of olive orchards. A simulation model of the system was developed in order to obtain the economically optimal design of this system. This model is composed of different sub-models: the photovoltaic power generation capacity sub-model, the direct pumping management sub-model and the sub-model that evaluates the economic and productive response of the crop to the application of water. The model simulates for increasing values of peak power of the photovoltaic system, the water and energy balance in the photovoltaic irrigation system and the crop yield. It also calculates the investments and operational costs of the system and, finally, the net economic returns to the farmer. The model enables us to select the optimal design of the system that achieves its maximum economic profitability.

The economically optimal designs provided by the model are not achieved for a completely full irrigation of the crop but rather for deficit irrigation. In this way, we propose a new approach to PV irrigation systems design and management that we call PV opportunity irrigation (PVOI). PVOI makes use of the ability of many crops to undergo some water stress without experiencing a significant yield loss in order to reduce the size of the PV irrigation system. The operational strategy in the PVOI approach is to irrigate as long as enough power is supplied by the PV array. Unlike any other conventional design method available in literature, the total amount of water applied to the crop depends on the energy provided by the PV

* Corresponding author.

E-mail addresses: fallolur@uco.es (R. López-Luque), jreca@ual.es (J. Reca), jumartin@ual.es (J. Martínez).



Nomenclature

D	soil water depletion	q	emitter discharge
ET_a	actual evapotranspiration of the crop (mm)	Q	total discharge of the pumping system (m^3/s)
ET_c	crop evapotranspiration (mm)	r_h	ratio of the minimum working pressure of the emitter
ET_o	reference evapotranspiration (mm)		(h_m) to the maximum (h_M)
F_w	fraction of soil wetted by the emitter	R_n	net irrigation depth (mm)
Н	total energy head (m)	R_s	equivalent resistance coefficient of the irrigation net-
h	working pressure head at the emitter (m)		work
hf	overall head loss in the distribution network (m)	S	slope coefficient for silicon cells $^{\circ}C/(W m^{-2})$
I(t)	irradiance on the inclined collector plane (W m ⁻²)	T_a	air temperature (°C)
$I_b(t)$	solar direct irradiance as a function of time t (W m ⁻²)	T_{cell}	temperature of the cells in the module (°C)
$I_d(t)$	solar diffuse irradiance as a function of time t (W m ⁻²)	T _{STC}	cell temperature under standard test conditions (°C)
Im	irradiance minimum threshold value (W m^{-2})	x	pressure-discharge exponent of the emitter
I _{STC}	irradiance under standard conditions (W m^{-2})	Y_a	actual crop yield
k	discharge coefficient of the emitter	Y_M	potential crop yield
Κ	overall inverse discharge coefficient of the emitters in	β	performance decay coefficient due to the rising tem-
	the irrigation network	,	perature of the cell
K _c	crop coefficient	Δz	elevation change (m)
K _{Es}	crop coefficient due to the surface evaporation from the	φ	tilt angle of the PV modules
20	soil outside the wetted bulb	$\dot{\rho}$	albedo
K _{Ew}	crop coefficient due to the Surface evaporation from the	θ	direct solar radiation incidence angle with respect to the
LW	soil wetted by the emitters		inclined collector plane
k _s	water stress coefficient	θ_z	direct solar radiation incidence angle with respect to the
K _{Tc}	crop coefficient due to the tree transpiration	- 2	horizontal plane
K _{Tw}	crop coefficient due to the cover crop (or actively grow-		F
	ing weeds) transpiration	Subscrip	to
K_y	yield response factor	•	refers to a specific day d
N	pump speed (rpm)	d	1 0
n _e	total number of emitters in the irrigation system	i	refers to the working conditions for the pump operating
P	net power transferred to the water (W)		at any intermediate speed
P_e	effective precipitation (mm)	М	refers to the working conditions for the pump operating
PP	peak power generated by the PV modules under stan-		at its maximum speed
11	dard conditions (W)	т	refers to the working conditions for the pump operating
P_{PV}	photovoltaic power provided by the PV system (W)		at its lowest speed
P _{PV} P _{PV.min}	minimum value of utilizable photovoltaic power (W)		
PV,min			

array rather than on a strict fulfillment of the pre-established crop water irrigation requirements. The application of the PVOI approach implies not only a reduction in the investment costs of the system but also some water savings, which is very important in areas with water scarcity.

© 2015 Elsevier Ltd. All rights reserved.

1. Introduction

Solar energy has a very high potential in Mediterranean areas as this region's climate is characterized by a high number of sunlight hours. For this reason, the irrigation of many crops in these areas with photovoltaic (PV) energy systems is increasingly gaining interest.

Olives are one of the most widespread crops in the Mediterranean basin. Their contribution to the local economy of many areas is of paramount importance. Traditionally, olives are cultivated under rainfed conditions; however, many studies have shown that the application of irrigation water results in a significant increase in yield and a considerable reduction of the problem of alternate bearing [1,2]. For this reason, in recent years, there has been an enormous increase in irrigated olive land area using drip irrigation systems.

Controlled deficit irrigation has been proposed as a profitable technique in water stress tolerant crops like olive orchards. The objective of deficit irrigation is to apply less water than that required to achieve a maximum potential yield. This technique is economically feasible for crops that are relatively tolerant to water stress and when the cost of the water applied is relatively high. The effect of different controlled deficit irrigation strategies on olive yield have been studied in different research works [3,1,4-7].

In spite of the abovementioned benefits of irrigation on the production of olive oil, many traditional olive orchards continue to be only rainfed as farms are located in outlying lands where other alternative crops are not feasible and, in many cases, far from electricity distribution facilities. The investment costs needed to electrify these farms can be excessively high. In addition, in many countries in the Mediterranean basin like Spain, the price of electricity has become increasingly higher in recent years. The increase in energy costs can jeopardize the economic feasibility of most of these olive orchards. The use of off-grid powering systems seems to be appropriate in cases like this one. At present, off-grid electrification is becoming an active field of research [8].

Standalone photovoltaic irrigation systems are being used for many types of irrigation systems throughout the world [9,10].

Download English Version:

https://daneshyari.com/en/article/6687097

Download Persian Version:

https://daneshyari.com/article/6687097

Daneshyari.com