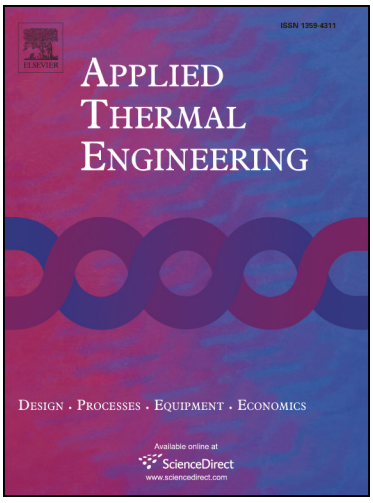

A performance evaluation index for two-phase thermosyphon loop used in HVAC systems

Penglei Zhang, Wenxing Shi, Xianting Li, Baolong Wang, Guohui Zhang

PII: S1359-4311(17)36579-1
DOI: https://doi.org/10.1016/j.applthermaleng.2017.12.056
Reference: ATE 11577

To appear in: *Applied Thermal Engineering*

Received Date: 13 October 2017
Revised Date: 7 December 2017
Accepted Date: 16 December 2017

Please cite this article as: P. Zhang, W. Shi, X. Li, B. Wang, G. Zhang, A performance evaluation index for two-phase thermosyphon loop used in HVAC systems, *Applied Thermal Engineering* (2017), doi: https://doi.org/10.1016/j.applthermaleng.2017.12.056

Manuscript prepared for Applied Thermal Engineering

A performance evaluation index for two-phase thermosyphon loop used in HVAC systems

Penglei Zhang [a,b], Wenxing Shi [b], Xianting Li [b,*], Baolong Wang [b], Guohui Zhang [b]

[a] *Institute of Air Conditioning and Refrigeration, College of Aerospace Engineering, Nanjing University of Aeronautics and Astronautics, Nanjing, 210016, P.R. China*

[b] *Department of Building Science, Tsinghua University, Beijing, 100084, P.R. China*

* Corresponding author: Prof. Xianting Li

Department of Building Science, School of Architecture

Tsinghua University

Beijing 100084, P.R. China

Tel: +86-10-62785860

Fax: +86-10-62773461

E-mail: xtingli@tsinghua.edu.cn