

Accepted Manuscript

Experimental and numerical assessment of the work of fracture in injection-moulded low-density polyethylene

Martin Kroon, Eskil Andreasson, Viktor Petersson, Pär A.T. Olsson

PII: S0013-7944(17)31054-8

DOI: <https://doi.org/10.1016/j.engfracmech.2018.02.004>

Reference: EFM 5862


To appear in: *Engineering Fracture Mechanics*

Received Date: 10 October 2017

Accepted Date: 2 February 2018

Please cite this article as: Kroon, M., Andreasson, E., Petersson, V., Olsson, P.A.T., Experimental and numerical assessment of the work of fracture in injection-moulded low-density polyethylene, *Engineering Fracture Mechanics* (2018), doi: <https://doi.org/10.1016/j.engfracmech.2018.02.004>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

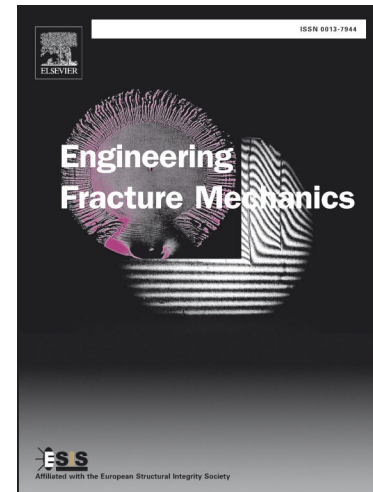

Experimental and numerical assessment of the work of fracture in injection-moulded low-density polyethylene

Martin Kroon^{*,a}, Eskil Andreasson^{b,c}, Viktor Petersson^b, Pär A. T. Olsson^{d,e}

^a*Linnaeus University, Växjö, Sweden*

^b*Tetra Pak, Lund, Sweden*

^c*Blekinge Technical University, Karlskrona, Sweden*

^d*Malmö University, Malmö, Sweden*

^e*Lund University, Lund, Sweden*

Abstract

The fracture mechanics properties of injection-moulded low-density polyethylene (LDPE) sheets were investigated both experimentally and numerically. The total work of fracture was determined experimentally, by means of fracture mechanics testing of sheets of injection-moulded LDPE with side cracks of different lengths. A multi-specimen method, proposed by Kim and Joe (Polymer Testing, 7, 1987, 355-363), was employed. The total work of fracture was estimated to 13kJ/m². The experiments were simulated numerically using the finite element method. Crack growth was enabled by inclusion of a cohesive zone, and the constitutive response of this zone was governed by a traction-separation law. The local (or essential) work of fracture was estimated through numerical analyses, where the initiation of crack growth was simulated and the outcome was compared to the experimental results. The local (i.e. essential) work of fracture was estimated to 1.7kJ/m², which

*Tel: +46-70-2214975, E-mail: martin.kroon@lnu.se

Download English Version:

<https://daneshyari.com/en/article/7168931>

Download Persian Version:

<https://daneshyari.com/article/7168931>

[Daneshyari.com](https://daneshyari.com)