



Selective speciation of inorganic antimony on tetraethylenepentamine bonded silica gel column and its determination by graphite furnace atomic absorption spectrometry

Durali Mendil^a, Hilmi Bardak^a, Mustafa Tuzen^{a,*}, Mustafa Soylak^b

^a Gaziosmanpasa University, Faculty of Science and Arts, Chemistry Department, 60250 Tokat, Turkey

^b University of Erziyes, Faculty of Science, Chemistry Department, 38039 Kayseri, Turkey

ARTICLE INFO

Article history:

Received 9 December 2012

Received in revised form

6 January 2013

Accepted 8 January 2013

Available online 16 January 2013

Keywords:

Tetraethylenepentamine bonded silica gel

Speciation

Antimony

Atomic absorption spectrometry

ABSTRACT

A speciation system for antimony (III) and antimony (V) ions that based on solid phase extraction on tetraethylenepentamine bonded silica gel has been established. Antimony was determined by graphite furnace atomic absorption spectrometry (GF-AAS). Analytical conditions including pH, sample volume, etc., were studied for the quantitative recoveries of Sb (III) and Sb (V). Matrix effects on the recovery were also investigated. The recovery values and detection limit for antimony (III) at optimal conditions were found as >95% and $0.020 \mu\text{g L}^{-1}$, respectively. Preconcentration factor was calculated as 50. The capacity of adsorption for the tetraethylenepentamine bonded silica gel was 7.9 mg g^{-1} . The validation was checked by analysis of NIST SRM 1573a Tomato laves and GBW 07605 Tea certified reference materials. The procedure was successfully applied to speciation of antimony in tap water, mineral water and spring water samples. Total antimony was determined in refined salt, unrefined salt, black tea, rice, tuna fish and soil samples after microwave digestion and presented enrichment method combination.

© 2013 Elsevier B.V. All rights reserved.

1. Introduction

Antimony is ubiquitous elements in the environment originating from natural sources as well as human activities. Antimony compounds are used in various industrial processes like glassware, ceramics and textile industry [1,2]. Antimony is known to be one of the most toxic elements and has serious effects on plants, animals and human health [3,4]. Inorganic compounds of antimony are more toxic than the organic compounds [5–8]. The toxicity of Sb (III) ions is 10 times higher than Sb (V) ions [9–11]. Antimony can accumulate in living organisms and exert high-toxic potential on human being and animals over a lifetime and its toxicity may cause lung cancer [12,13]. Antimony in drinking water should be lower than $5 \mu\text{g L}^{-1}$ [14,15]. Therefore, a highly sensitive and simple method is necessary for the determination of antimony concentration in environment [8].

Several analytical techniques such as hydride generation atomic absorption spectrometry, inductively coupled plasma optical emission spectrometry, electrothermal atomic absorption spectrometry etc. have been used for the determination of antimony levels in environmental samples. To obtain reliable

results, an efficient separation and enrichment step is necessary prior to analysis of antimony species. Several separation-enrichment procedures including coprecipitation, cloud point extraction, membrane filtration, liquid-liquid extraction, solid phase extraction, etc. have been used for antimony species analysis [6,13–21].

In this present study, a simple, low cost, safety, sensitive and selective speciation method was developed for determination of Sb (III) and Sb (V) ions by using modified silica gel with GFAAS. Tetraethylenepentamine bonded silica gel were used as an adsorbent to solid phase extraction procedure for speciation of antimony (III) and antimony (V) in tap water, spring water and mineral water samples. Antimony was determined in refined salt, unrefined salt, black tea, rice, tuna fish and soil samples after microwave digestion and presented method combination.

2. Experimental

2.1. Instrumental

Antimony was determined by A Perkin Elmer AAnalyst 700 model (Norwalk, CT, USA) atomic absorption spectrometry equipped with HGA graphite furnace and with deuterium background corrector. The operating parameters for antimony are given in

* Corresponding author. Tel.: +90 356 2521616; fax: +90 356 2521585.

E-mail addresses: mustafa.tuzen@gop.edu.tr, mtuzen@gop.edu.tr (M. Tuzen).

Table 1. Pyrolytic-coated graphite tubes (Perkin Elmer part no.: B3 001264) with a platform were used. Samples of 20 μl plus 10 μl of mixture of 0.015 mg Pd+0.010 mg $\text{Mg}(\text{NO}_3)_2$ as matrix modifier during the study were injected into the furnace using Perkin Elmer AS-800 autosampler. The signals were measured as peak areas. Jasco FT/IR-430 was used for IR spectra of modified and unmodified silica gel and Leco (TruSpec MICRO Series) model elemental analyzer was used for elemental analysis of modified and unmodified silica gel. pH values in the aqueous phase were measured with Sartorius pp-15 Model glass-electrode pH meter.

2.2. Reagents and solutions

Analytical reagent-grades were used during the study. Silica gel 60 (Merck), mesh size of 0.063–0.200 mm, was used. A 1000 $\mu\text{g mL}^{-1}$ Sb (III) stock solutions was prepared by SbCl_3 (Sigma-Aldrich). 1000 $\mu\text{g mL}^{-1}$ Sb (V) stock solution was prepared by dissolving SbCl_5 (Sigma-Aldrich). The pH of the model solutions was adjusted to pH 2–4 with $\text{H}_2\text{PO}_4^-/\text{H}_3\text{PO}_4$ buffers, pH 4–6 with $\text{CH}_3\text{COO}^-/\text{CH}_3\text{COOH}$ buffers and pH 8–9 with $\text{NH}_4^+/\text{NH}_3$ buffer solutions. Deionised water (Milli-Q Millipore 18.2 $\text{M}\Omega\text{ cm}^{-1}$ resistivity) was used for all dilutions.


2.3. Synthesis of the tetraethylenepentamine bonded silica gel (TPA-SG)

Silica gel (20 g) was purified and activated with concentrated HCl for 6 h, then filtered and washed several times with deionized water and dried at 150 $^\circ\text{C}$ for 24 h. For synthesis of 3-chloropropyltrimethoxysilane bonded silica gel (Cl-SG), dry activated silica gel (10 g) were mixed with 10 mL of 3-chloropropyltrimethoxysilane in 100 mL anhydrous toluene and refluxed 24 h under nitrogen atmosphere. The mixture was filtered and washed with toluene, ethanol and diethyl ether and dried 60 $^\circ\text{C}$ for 6 h. The reaction is given below in Scheme 1.

For synthesis of tetraethylenepentamine bonded silica gel (TPA-SG), 3-chloropropyltrimethoxy-silane bonded silica gel (10 g) were reacted with triethylamine (12 mL) and tetraethylenepentamine (10 mL) in 100 mL of dry toluene and refluxed at 24 h under nitrogen atmosphere. The product, TPA-SG was

Table 1
Instrument settings for GFAAS determination of antimony.

Wavelength (nm)	217.6
Slit width (nm)	0.71
Lamp current (mA)	18
Argon flow (mL min^{-1})	250
Atomization site	Pyrolytic/platform
Reading time	5 s
Heating program temperature	$^\circ\text{C}$ (ramp time (s), hold time (s))
Drying 1	100 (5, 20)
Drying 2	140 (15, 15)
Ashing	1100 (10, 20)
Atomization	2000 (0, 5)
Cleaning	2600 (1, 3)

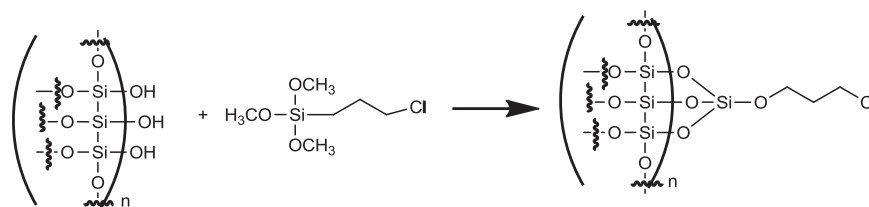

Scheme 1. Synthesis of 3-chloropropyltrimethoxysilane bonded silica gel (Cl-SG).

filtered and washed with toluene, ethanol and diethyl ether and dried 60 $^\circ\text{C}$ for 6 h [22,23]. The reaction is shown in Scheme 2.

2.4. Preparation of tetraethylenepentamine bonded silica gel column

500 mg of TPA-SG was loaded into a $10 \times 100\text{ mm}^2$ glass column (resin bed: 2 cm) equipped with porous disc. The TPA-SG column was preconditioned by passing a buffer solution prior to use. After each the elution, the TPA-SG column was washed with 10 mL of water.

2.5. Analytical procedure for antimony species

Model solutions (50 mL) containing 1.0 μg of antimony (III) and 1.0 μg antimony (V) were buffered to pH 6 using buffer solution. Then, the solutions were passed through the glass column filled with TPA-SG at a flow rate of 4 mL min^{-1} . Adsorbed Sb (III) was eluted with 5 mL of 2 mol L^{-1} HNO_3 . Antimony (III) concentration was determined by GF-AAS.

2.6. Reduction of Sb (V) to Sb (III) and determination of total antimony

For the determination of total antimony, 0.5% (m/v) L-cysteine at pH 6 was added to 50 mL of model solution containing 1 μg of Sb (III) and 1 μg of Sb (V) and heated for 25 min in boiling water bath [2,13]. After the reduction, the solutions were passed through the column filled with TPA-SG at a flow rate of 4 mL min^{-1} . Adsorbed antimony ions on the TPA-SG were eluted with 5 mL of 2 mol L^{-1} HNO_3 . Antimony concentration was determined by GF-AAS. The Sb (V) ion concentration was calculated by subtracting the Sb (III) concentration from the total antimony concentration.

2.7. Analysis of the real samples

2.7.1. Application to microwave digested samples

Milestone Ethos D closed vessel microwave system (maximum pressure 1450 psi, maximum temperature 300 $^\circ\text{C}$) was used for digestion of the solid samples. Digestion conditions for microwave system for the samples were applied as 2 min for 250 W, 2 min for 0 W, 6 min for 250 W, 5 min for 400 W, 8 min for 550 W, vent: 8 min [3]. NIST SRM 1573a Tomato laves, GBW 07605 Tea standard reference materials (250 mg), refined salt, unrefined salt, black tea, rice, tuna fish and soil (1.0 g) were digested with 6 mL of HNO_3 (65%) and 2 mL of H_2O_2 (30%) in closed microwave digestion system and diluted to 50.0 ml with deionized water. A blank digest was carried out in the same way. Then the procedure given above was applied to the final solutions.

2.7.2. Application to natural water samples

The water samples (tap water, mineral water and spring water) were filtered through a cellulose membrane filter (Millipore) of 0.45 μm pore size. The pH of the samples was adjusted to 6.0 with buffer solution. Then the speciation procedure given

Download English Version:

<https://daneshyari.com/en/article/7683447>

Download Persian Version:

<https://daneshyari.com/article/7683447>

[Daneshyari.com](https://daneshyari.com)