

## Accepted Manuscript

Ultrasonic vs hydrothermal method: different approaches to convert fly ash into zeolite. How they affect the stability of synthetic products over time?

Claudia Belviso


PII: S1350-4177(17)30634-X  
DOI: <https://doi.org/10.1016/j.ultsonch.2017.12.050>  
Reference: ULTSON 4034

To appear in: *Ultrasonics Sonochemistry*

Received Date: 11 October 2017  
Revised Date: 28 December 2017  
Accepted Date: 29 December 2017

Please cite this article as: C. Belviso, Ultrasonic vs hydrothermal method: different approaches to convert fly ash into zeolite. How they affect the stability of synthetic products over time?, *Ultrasonics Sonochemistry* (2017), doi: <https://doi.org/10.1016/j.ultsonch.2017.12.050>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

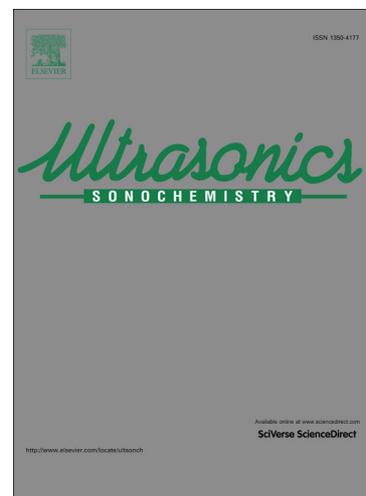

**Ultrasonic vs hydrothermal method: different approaches to convert fly ash into zeolite. How they affect the stability of synthetic products over time?**

Claudia Belviso<sup>a,b\*</sup>

<sup>a</sup>Istituto di Metodologie per l'Analisi Ambientale – IMAA-CNR, Tito Scalo (PZ),  
85050, Italy

<sup>b</sup>Istituto di Struttura della Materia – ISM-CNR, Area di Tito Scalo (PZ), 85050, Italy

**Corresponding author:** Claudia Belviso – IMAA/ISM–CNR, Tito Scalo (Potenza),  
Italy. [claudia.belviso@imaa.cnr.it](mailto:claudia.belviso@imaa.cnr.it) - phone:+390971427224; fax:+390971427222

Download English Version:

<https://daneshyari.com/en/article/7702873>

Download Persian Version:

<https://daneshyari.com/article/7702873>

[Daneshyari.com](https://daneshyari.com)