

Accepted Manuscript

Studies on an ultrasonic atomization feed direct methanol fuel cell

Chaoqun Wu, linghao liu, Kai Tang, Tao Chen

PII: S1350-4177(16)30160-2

DOI: <http://dx.doi.org/10.1016/j.ultsonch.2016.05.018>


Reference: ULTSON 3228

To appear in: *Ultrasonics Sonochemistry*

Received Date: 28 March 2016

Revised Date: 7 May 2016

Accepted Date: 11 May 2016

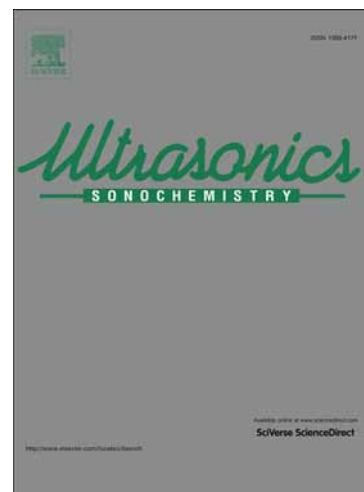

Please cite this article as: C. Wu, I. liu, K. Tang, T. Chen, Studies on an ultrasonic atomization feed direct methanol fuel cell, *Ultrasonics Sonochemistry* (2016), doi: <http://dx.doi.org/10.1016/j.ultsonch.2016.05.018>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

Studies on an ultrasonic atomization feed direct methanol fuel cell

Chaoqun Wu^{*,a}, linghao liu^a, Kai Tang^a and Tao Chen^a

^aSchool of Mechanical and Electronic Engineering, Wuhan University of Technology, 122 Luoshi Road, Wuhan, Hubei, 430070, P. R. China

chaoqunwu@whut.edu.cn 810773463@qq.com tk18671400322@whut.edu.cn chent29@whut.edu.cn

Abstract: Direct methanol fuel cell (DMFC) is promising as an energy conversion device for the replacement of conventional chemical cell in future, owing to its convenient fuel storage, high energy density and low working temperature. The development of DMFC technology is currently limited by catalyst poison and methanol crossover. To alleviate the methanol crossover, a novel fuel supply system based on ultrasonic atomization is proposed. Experimental investigations on this fuel supply system to evaluate methanol permeation rates, open circuit voltages (OCVs) and polarization curves under a series of conditions have been carried out and reported in this paper. In comparison with the traditional liquid feed DMFC system, it can be found that the methanol crossover under the ultrasonic atomization feed system was significantly reduced because the DMFC reaches a large stable OCV value. Moreover, the polarization performance does not vary significantly with the liquid feed style. Therefore, the cell fed by ultrasonic atomization can be operated with a high concentration methanol to improve the energy density of DMFC. Under the supply condition of relatively high concentration methanol such as 4M and 8M, the maximum power density fed by ultrasonic atomization is higher than liquid by 6.05% and 12.94% respectively.

Keywords: ultrasonic atomization; methanol crossover; direct methanol fuel cell; open circuit voltage; polarization performance

1. Introduction

The direct methanol fuel cell (DMFC) is an electrochemical device using methanol as

*Corresponding author. School of Mechanical and Electronic Engineering, Wuhan university of Technology, 122 Luoshi Road, Wuhan, Hubei, 430070, P.R. China Tel.: +8615172492685; fax: +862787651793
E-mail address: chaoqunwu@whut.edu.cn (C.Q. Wu)

Download English Version:

<https://daneshyari.com/en/article/7703657>

Download Persian Version:

<https://daneshyari.com/article/7703657>

[Daneshyari.com](https://daneshyari.com)