



Contents lists available at ScienceDirect

Aerospace Science and Technology

www.elsevier.com/locate/aescte



Short communication

An improved propeller design method for the electric aircraft

Song Xiang^{a,b}, Yuan-qiang Liu^b, Gang Tong^a, Wei-ping Zhao^a, Sheng-xi Tong^b,
Ya-dong Li^b^a Liaoning Key Laboratory of General Aviation, Shenyang Aerospace University, No. 37 Daoyi South Avenue, Shenyang, Liaoning 110136, People's Republic of China^b Liaoning General Aviation Academy, No. 37 Daoyi South Avenue, Shenyang, Liaoning 110136, People's Republic of China

ARTICLE INFO

Article history:

Received 5 January 2018

Received in revised form 2 May 2018

Accepted 7 May 2018

Available online xxxx

Keywords:

Electric aircraft

High efficiency

Propeller

Wind tunnel test

New energy

ABSTRACT

In this paper, an improved propeller design method for the electric aircraft was presented. For a given operative condition and profile distribution along the blade, the present method can determine the chord and pitch angle distribution of the blade, together with its efficiency and its torque and thrust coefficients of the maximum efficiency propeller. According to the flight velocity, thrust and rotate speed of cruise condition, the propeller of an electric aircraft was designed using the present method. Wind tunnel test of scaled model of propeller (diameter 0.96 m) was carried out. The test results show that present method was suitable to design the propeller of the electric aircraft.

© 2018 Published by Elsevier Masson SAS.

0. Introduction

Due to their 'near zero emission', low noise, electric aircraft powered by Lithium-ion battery are becoming increasingly attractive. In the world, several companies have researched and manufactured the electric aircraft powered by Lithium-ion batteries or fuel cells. For examples, Pipistrel company of Slovenia, Airbus company, Yuneec company of China, Shenyang Aerospace University of China.

Taurus Electro G2 of Pipistrel is the electric 2-seat aircraft in serial production available on the market. The propulsion motor of G2 weighs an impressive 11 kg (rather than 16 kg) and generates 40 kW power. Pipistrel's Taurus G4 [1] is the World's first four-seat electric aircraft with the unique twin-fuselage configuration, maximum take-off Weight of 1,500 kg, total energy capacity of 90 kWh, maximum power of 150 kW. G4 is the winner of the NASA Green Flight Challenge 2011, sponsored by Google. The E-Fan is a two-seater electric aircraft being developed by Airbus Group. The aircraft uses on-board lithium batteries to power the two electric motors and can carry two passengers. A test flight was conducted in April 2014 at Mériban Airport, France. The target market is pilot training. Airbus announced that the E-Fan 2.0 will go into production by 2017 with a side-by-side seating layout. The Yuneec International E430 is a Chinese two-seat electric aircraft designed for commercial production by Yuneec. The first flight of the E430 took place from the Yuneec factory near Shanghai, China

E-mail address: xs74342@sina.com (S. Xiang).<https://doi.org/10.1016/j.ast.2018.05.008>

1270-9638/© 2018 Published by Elsevier Masson SAS.

on June 12, 2009. The RX1E is an electric powered two-seat, composite construction aircraft with a T-tail and tricycle landing gear. The aircraft was developed by the Shenyang Aerospace University, and is one of the first electric airplanes in production. The company has 28 orders for the aircraft. Politecnico di Torino [2–5] developed the environmentally friendly inter-city aircraft powered by fuel cells. The fuel cell system of ENFICA-FC was installed on the light RAPID 200 sports.

The propeller was used to generate thrust for the electric aircraft powered by Lithium-ion batteries or fuel cells. But the most of the existing propellers were designed for the conventional fuel engines. The fuel engine has sufficient torque to drive the propeller. Due to the torque of electric motor is limited, the design of the propeller for the electric aircraft is difficult. In order to enhance the endurance of the electric aircraft, a highly efficient propeller was required.

Many scholars have researched the design, analysis and testing of the propeller. Angelo et al. [6] presented two numerical procedures for the propeller. The first algorithm allows for the determination of the geometric characteristics of the maximum efficiency propeller for a given operative condition. The second algorithm allows for the evaluation of the efficiency, the thrust and torque coefficients of a propeller of known geometry. Romeo et al. [7] dealt with the design and testing of a propeller for a two-seater aircraft powered by fuel cells. In their studies, an optimal two-blade propeller has been designed and manufactured to be installed on the Rapid 200 FC airplane. Slavík [8] presented a method for preliminary determination of propeller thrust and power coefficients by

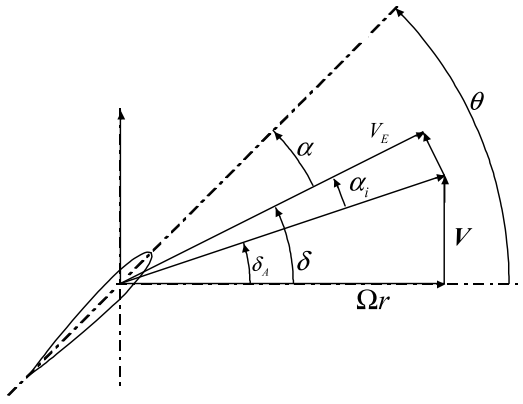


Fig. 1. Blade profile of radial position r .

means of blade chord and blade angle setting at 70% of the top radius, airfoil thickness at the radius near the tip and the position of the maximum blade width. Sabzehparvar [9] developed a propeller model that will accurately predict airplane engine static and dynamic thrust and torque in a full range of advance ratio. Morgado [10] presented the design and optimization of a propeller for on the MAAT cruiser airship by means of the inverse design methodology. Lieser et al. [11] performed the aeroacoustic calculation of a 6-bladed propeller by the blade element method. Rizk and Jouj [12] investigated and demonstrated the feasibility of combining an analysis code and an optimization procedure for designing propellers. Dorfling and Rokhsaz [13] presented a procedure for deriving the Euler-Lagrange equations for both unconstrained and constrained propeller blade-twist optimization. Chang and Sullivan [14] presented a method for the optimization of propeller twist. In their method, the propeller is represented by a curved lifting line and a number of control points. Chen et al. [15] experimentally studied the aerodynamic performance of the high-altitude propeller, especially the counter rotation effects. Influences of different configurations on a stratospheric airship, included 2-blade counter-rotating propeller (CRP), dual 2-blade single rotation propellers (SRPs) and 4-blade SRP, are also indicated. Their research indicates that the effect of counter rotation can greatly improve the efficiency.

In this paper, an improved propeller design method for the electric aircraft was presented. For a given operative condition and profile distribution along the blade, the present method can determine the chord and pitch angle distribution of the blade, together with its efficiency and its torque and thrust coefficients of the maximum efficiency propeller. According to the flight velocity, thrust and rotate speed of cruise condition, the propeller of an electric aircraft was designed using the present method. Wind tunnel test of scaled model of propeller was carried out.

1. Designed method of propeller

For a given thrust T , flight velocity V , rotation angular velocity of propeller Ω , blade number n , propeller radius R , hub radius R_h , airfoil distribution along the blade, the energy loss of maximum efficiency propeller is minimum. If all the profile along the blade operates at the maximum efficiency (maximum lift to drag ratio), the propeller efficiency is maximum. Blade profile of radial position r is shown in Fig. 1.

Design procedure of the propeller with high efficiency is as follows:

- (1) If the blade is divided into n_b sections ($n_b + 1$ profiles)
- (2) Determining the Lagrange multiplier K , the integral equation is as follows:

$$\frac{T}{\rho 4\pi V^2} = \int_{R-R_h}^R (K_1 + K_1^2) k_p r dr \quad (1)$$

where ρ is air density, k_p is correction factor.

$$k_p = \frac{2}{\pi} \arccos\left(e^{-\frac{n}{2}\left(1-\frac{r}{R}\right)\sqrt{1+\left(\frac{\Omega R}{V}\right)^2}}\right) \quad (2)$$

$$K_1 = \frac{K}{1 + \left(\frac{V}{\Omega r}\right)^2 (1 + K)^2} \quad (3)$$

In Angelo et al. [6], the each blade section chord is obtained by the iteration method. But in the present paper, the chord distribution along the blade can be determined by the following function:

$$b = c_1 \beta^{-(\xi_i - m)^2} \quad (4)$$

where non-dimensional chord length $b = l/R$, l is the chord length of a profile, c_1 is the maximum chord length among all profiles, non-dimensional radial coordinate of i th profile $\xi_i = \frac{r_i}{R}$, m denotes the non-dimensional radial coordinate of a profile with maximum chord length, β is the chord distribution coefficient, $2 \leq \beta \leq 100$.

(3) Determining the pitch angle θ of the i th profile.

The δ is calculated by the Eq. (5).

$$\delta = \arctan\left[\frac{\lambda}{\xi_i} (1 + K)\right] \quad (5)$$

where $\lambda = \frac{V}{\Omega R}$ is the advanced ratio.

Induced attack angle α_i can be calculated by the Eq. (6).

$$\alpha_i = \arctan\left(\frac{K \sin \delta \cos \delta}{1 + K \cos^2 \delta}\right) \quad (6)$$

\hat{V}_E can be calculated by Eq. (7).

$$\hat{V}_E = \sqrt{1 + \left(\frac{\xi_i}{\lambda}\right)^2} \cos \alpha_i \quad (7)$$

Local Renold number and Mach number can be calculated by the Eq. (8).

$$Re_\xi = \hat{V}_E b \cdot Re, \quad Ma_\xi = \hat{V}_E \cdot Ma \quad (8)$$

where b can be obtained by the Eq. (4), Re is the Renold number of free stream, $Re = \rho V R / \mu$, Ma is the Mach number of free stream, $Ma = V/c$, c is the sound speed.

Xfoil6.96 is used to calculate the lift to drag ratio of airfoil. α_{max} is the attack angle at maximum lift to drag ratio. Cl_{max} is the lift coefficient at attack angle α_{max} . Cd_{max} is the drag coefficient at attack angle α_{max} .

Pitch angle θ of i th profile is

$$\theta = \delta + \alpha_{max} \quad (9)$$

(4) Repeating the Eqs. (5)–(9), we can obtain the pitch angle θ , attack angle α_{max} , lift coefficient Cl_{max} and drag coefficient Cd_{max} of each profile.

(5) Determining the efficiency of propeller

Thrust coefficient and torque coefficient can be calculated by Eq. (10) and Eq. (11), respectively.

$$\tau = \int_{\xi_{min}}^1 \frac{n\lambda^2}{2} \hat{V}_E^2 (Cl_{max} \cos \delta - Cd_{max} \sin \delta) b d\xi \quad (10)$$

$$\chi = \int_{\xi_{min}}^1 \frac{n\lambda^2}{2} \hat{V}_E^2 (Cl_{max} \sin \delta + Cd_{max} \cos \delta) b \xi d\xi \quad (11)$$

Download English Version:

<https://daneshyari.com/en/article/8057550>

Download Persian Version:

<https://daneshyari.com/article/8057550>

[Daneshyari.com](https://daneshyari.com)