FISEVIER

Contents lists available at ScienceDirect

### Sustainable Energy Technologies and Assessments

journal homepage: www.elsevier.com/locate/seta



### Original article

## Cost metrics of electrical energy storage technologies in potential power system operations



Pavlos Nikolaidis<sup>a</sup>, Andreas Poullikkas<sup>b,\*</sup>

- Department of Electrical Engineering, Cyprus University of Technology, P.O. Box 50329, 3603 Limassol, Cyprus
- <sup>b</sup> Cyprus Energy Regulatory Authority, P.O. Box 24936, 1305 Nicosia, Cyprus

### ARTICLE INFO

# Keywords: Electricity storage Power system operations Electricity storage cost metrics Electricity markets Power economics

### ABSTRACT

Modern power systems could not exist without the many forms of electricity storage that can be integrated at different levels of the power chain. In this work, the most important applications in which storage provides technical, economic and environmental benefits such as arbitrage, balancing and reserve power sources, voltage and frequency regulation, investment deferral, cost management and load shaping and leveling, are reviewed. Using a 5-function normalization technique the technical and operational characteristics relating to 18 electrical energy storage (EES) technologies are qualitatively assessed and the technology-application pairs identified across the power chain are presented. In particular, two functions were used to normalize the characteristics expressed in real units, two further functions were used for those in percentage values and one function was used to quantify the technical maturity. For large-scale/energy-management applications pumped hydro is the most reliable energy storage option over compressed-air alternatives whereas flywheel and electromagnetic EES devices are still focused on short-duration/power-based applications including frequency regulation, uninterruptible power supply, spinning reserve, etc. Encouraged by the appropriate market and regulatory structures, economics enable storing bulk electricity produced by intermittent sources connected to the grid, rather than using it at once. In medium-to-large scales advanced Pb-acid and molten-salt batteries are considered capable of storing distributed electricity, providing the advantage of load leveling of both the supply network and generation plant. In terms of safety and simplicity, Pb-acid and Li-ion systems are viable options for small-scale residential applications, giving consumers an incentive to reduce their time-of-use charges. Apart from their expected use in transportation sector in the forthcoming years, regenerative fuel cells and flow batteries may offer intriguing potential in stationary applications once mature to commercialization.

### Introduction

Global efforts aiming to shift towards emission-free and renewable sources, and reduce the dependence on fossil fuels, have forced the whole energy system to dramatic changes. Some of the most important concern large-scale intermittent renewable sources connected to the grid, highly distributed generation, growing penetration of plug-in hybrid electric vehicles (PHEVs) and EVs, opening the field for active participation of EES [1–4]. EES topologies for micro grid (AC or DC) and smart grid system operations which are expected to thrive in the future are also of vital importance [5]. Since electricity is crucial to the development, progress, and overall lifestyle in the global economy, improvements in both renewable and storage technologies are continuously needed for the grid to accommodate the ever-increasing variable sources [6].

For several years now, EES is attracting increasing interest for

power grid applications that provide regulation, contingency and management reserves [7]. Each technology possesses its own benefits and weaknesses in relation to the stakeholders and services across the different locations in power chain. Fig. 1 illustrates by technology the total installed capacity which almost 99% stems from pumped hydro. This is followed by compressed air and sodium sulphur with a contribution of 440 MW and 316 MW respectively, while the rest of 280 MW is held by flow battery (89 MW), lead-acid (75 MW), lithiumion (49 MW), flywheel (40 MW), nickel cadmium (27 MW) and hydrogen-fuel cell (1MW) [8–11]. Factors limiting the global capacity of EES systems are the lack of regulatory and market structures which are developed for traditional power systems, as well as, the confusion caused by the term of storage as it occasionally acts as increased demand or generator [12,13].

The development status, comparisons and cost metrics regarding EES technologies have been extensively published in the literature.

E-mail address: apoullikkas@cera.org.cy (A. Poullikkas).

<sup>\*</sup> Corresponding author.

Nomenclature		${\rm LiNiO_2}$	lithium nickel oxide
		$LiPF_6$	lithium hexafluorophosphate
AA-CAES advanced adiabatic compressed air energy storage		LL	load levelling
AC	alternating current	LVRT	low voltage ride-through
Al	aluminium	LTS	low-temperature superconducting
BBES	buoyancy based energy storage	η	efficiency
BES	battery energy storage	NaNiCl	sodium nickel chloride
BHES	buoyant hydraulic energy storage	NaS	sodium sulphur
BS	black-start	NiCd	nickel cadmium
CAES	compressed air energy storage	NiMH	nickel metal hydride
$C_{i}$	cost values	O&M	operation and maintenance
CR	contingency reserve	OD	oscillation damping
DC	direct current	ORES	ocean renewable energy storage
DoD	depth of discharge	Pb-acid	lead acid
DS	demand shifting	PCM	phase change material
EA	energy arbitrage	PHEVs	plug-in hybrid electric vehicles
ECc	energy capital cost	PHES	pumped-hydro energy storage
EDLC	electrochemical double layer capacitor	PS	peak shaving
EES	electrical energy storage	PSB	polysulfide bromide
EFC	electrochemical flow capacitors	RS	reactive support
EB	emergency back-up	RES	renewable energy sources
EVs	electric vehicles	SDR	self-discharge rate
FC	fuel cell	SMES	superconducting magnetic energy storage
FES	flywheel energy storage	SS	seasonal storage
$\mathbf{F_{i}}$	feature values	SS-CAES	small-scale compressed air energy storage
FHM	forecast hedging mitigation	T&D CR	transmission & distribution congestion relief
FR	frequency regulation	UC	unit commitment
FS	fluctuation suppression	UPS	uninterruptible power supply
HTS	high-temperature superconducting	UW-CAES	Sunderwater compressed air energy storage
LAES	liquid air energy storage	VR	voltage regulation
LF	load following	VRB	vanadium redox flow battery
Li	lithium	VRLA	valve-regulated lead acid
$LiCoO_2$	lithium cobalt oxide	Zn	zinc
$LiMO_2$	lithium nickel manganese oxide	ZnBr	zinc bromine

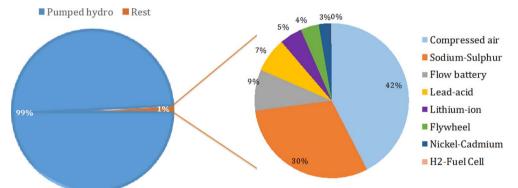


Fig. 1. Global EES capacity by technology.

Some recent research has been conducted on the performance of EES in power system operations. In [14], the status of battery energy storage technology and methods of assessing their impact on power system operations were discussed, while in [15] a look was taken at the field of application of different storage techniques. Francisco Diaz-Gonzalez et al. [16] reviewed the main characteristics of EES systems for stationary wind power applications.

In terms of technical characteristics, applications and deployment status, an executive comparison among various technologies was also made in Ref. [17]. Faizur Rahman et al. [18] identified the most suitable EES technologies for storing electricity generated from renewable energy sources (RES) via a comparative overview based on the climatic conditions and supply demand situation in Saudi Arabia. A technoeconomic comparison of energy storage options for island autonomous

electrical networks has been presented in [19], with a focus on RES integration increase and optimum operation of existing thermal power stations. The research in [20] focuses on the advantages and disadvantages of EES systems for the challenges imposed by variable renewable energy sources with reference to power quality, regulation, load following, unit commitment and seasonal storage.

A method of optimal sizing and operation of a battery energy storage system used for spinning reserve and frequency regulation was presented by Pascal Mercier et al. [21], while the authors in Ref. [22] developed a dynamic conditioning concept to smooth the fluctuating power output from wind parks through electrical storage. The research work in Ref. [23] demonstrated the feasibility of mechanical energy storage for short-term power back-up in high-reliability applications. The benefits of energy storage on distribution networks providing

### Download English Version:

### https://daneshyari.com/en/article/8122788

Download Persian Version:

https://daneshyari.com/article/8122788

<u>Daneshyari.com</u>