

A phase-diversity speckle experimental system for one meter-scale ground-based telescope



Shixue Zhang*, Bin Wang

Changchun Institute of Optics, Fine Mechanics and Physics, Chinese Academy of Sciences, Dongnanhu Road No. 3888, Changchun 130033, China

ARTICLE INFO

Article history:

Received 14 October 2014

Accepted 8 September 2015

Keywords:

Phase diverse speckle
Wave-front aberration
Image restoration
Phase estimation

ABSTRACT

Phase-diversity (PD) is the least square adaptive-filter of the imaging system based on wave optics theory. It can use unknown extended object as the observation object to collect two or more images whose wave-front diversities are known and fixed. According to the images, the wave-front of the optical system can be calculated by PD, and simultaneously the estimation of ideal image for the observation object can be obtained. Phase-diverse speckle (PDS) technique extends PD by using a series of short-expose frames as the input. In this paper, we designed PDS experiment on a 1.23 m telescope and successfully got clear restored images of space objects. Under the observation condition that the atmospheric coherent length was not more than 8 cm at 500 nm wavelength in Changchun city, we replaced the deformable mirror with a plane mirror in adaptive optical system and separately used the moon and Polaris as the observation objects. For Polaris, the FWHM reduced from 20.6 to 5.3 (in pixel), which decreased about 74%. The experimental results demonstrate that PDS algorithm can be used on one meter-scale telescope in practical observation.

© 2015 Elsevier GmbH. All rights reserved.

1. Introduction

The wave-front phase aberration caused by atmospheric turbulence becomes serious, when the aperture of the ground-base telescope becomes larger [1–7], and that obviously degrades images. The conventional method to solve the above problem is to use Hartmann wave-front detector to detect wave-front information by adaptive optics and calibrate the wave-front by deformable mirror. However, for one meter-scale telescope, D/r_0 is less than 20, and the influence of atmospheric turbulence is much smaller than two meter-scale telescope. The proportion of the adaptive optics system in the total cost is very high, and the maintenance is very expensive, so it is hard to calibrate extended object by adaptive optics system. Therefore it is necessary to find a reliable, low cost method to solve the problem.

Phase-diverse speckle (PDS) is an image restoration method to correct wave-front phase distortion. It combines the advantages of Phase Diversity and speckle imaging, and can not only estimate wave-front phase but also use multiple channels [8]. The structure of PDS optical system is simple, clear and low cost, suitable for both point source objects and extended objects. Besides, PDS has a good performance in image restoration, and

it can also be applied to the field of optical detection. It can detect the aberration, alignment errors, mirror flatness and other parameters of the optical system, which provides new ideas and methods for optical detection without suitable collimators [9]. So PDS technique is an important direction to overcome the wave-front phase distortion at present, and it has many irreplaceable advantages.

PD technique was first proposed by Gonsalves in 1979, it extracts phase information from focused and defocused images and recovers the object with known defocus amount. PD technique not only can simplify the optical path of wave-front sensor, but also can detect the wave-front information of the extended object. And it gets rid of the dependence on the point object for a majority of wave-front sensors. Paxman et al. [10–12] further improved PD theory, they proposed PDS technique by collecting one pair or more pairs of short-expose images on focus plane and defocus plane of the imaging system, and gave the mathematical models under Gaussian noise and Poisson noise, which greatly improved the estimation precision. Vogel et al. [13,14] proposed the fast numerical solution by theories about inverse problem. Löfdahl et al. [15,16] successfully applied PDS theory to the field of solar observation and obtained high resolution images of the structure of solar surface. Denolle et al. [17] proposed a new analytical WFS technique that can measure disturbances from the images in a wide range of cases, with various levels of complexity. Blanc et al. [18] proposed a novel method called marginal estimator for estimating the

* Corresponding author. Tel.: +86 431 86708872; fax: +86 431 84627071.
E-mail address: zhangsx@ciomp.ac.cn (S. Zhang).

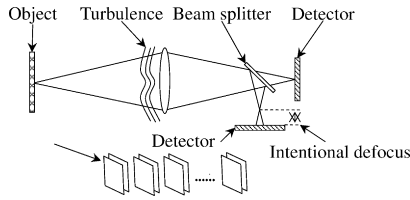


Fig. 1. The scheme of data-collection image by PD.

aberrations and the object from phase-diversity data, and got good results.

Based on the study above, we built PD optical path in the optical box on a 1.23 m telescope without adaptive optical path. Under the observation condition that the atmospheric coherent length was not more than 8 cm at 500 nm wavelength, we separately used the single star, binary star, the moon, Polaris and rocket debris as the observation objects to make the image restoration experiments through PD and got good performance. The experimental results demonstrate the feasibility of using PD in image restoration on one meter-scale telescope without adaptive optical system.

2. Basic principle

It is known that both the process of image restoration and the solution of the wave-front from a single image are ill-posed. The reason is that point-spread function (PSF) can be mapped to multiple wave-fronts. In phase diversity, the incoming wave-front is estimated from at least two images of the same object recorded in presence of a known optical aberration (e.g. defocus), both the unknown incoming wavefront and the observed object can be derived. Phase diversity has the particularity of providing the estimation of the unaberrated object as well as the aberrations responsible for the blurring. This method directly uses image data for the estimation of the aberrations. It is thus sensitive to all aberrations degrading the quality of the imaging telescope, contrarily to WFSs such as the Shack–Hartman, which use a dedicated light path and thus are affected by non-common path aberrations. Furthermore, the optical hardware of PD is simple. Phase diversity is becoming a widespread method both to compensate quasi-static optical aberrations and to obtain diffraction-limited imaging through turbulence.

Fig. 1 illustrates the optical path of PD system. There are focus and defocus collection channels, and the numbers of collection channels can be increased if necessary. The problem of PD image restoration can be regarded as the inverse problem of seeking phase of original signal through the known analog of interference signal or be seen as an adaptive filter.

2.1. Imaging system model

Atmosphere and telescope can be seen as a linear space-invariant system approximately. Under the non-coherent light illumination, the imaging function of Gaussian noise model [1] is

$$d(x) = f(x) * s(x) + n(x) \quad (1)$$

where d is the image of object collected on CCD; f is the ideal image of object; s is the point spread function; n is the Gaussian noise; x is the coordinate of image plane.

In near field, the point spread function [1] is

$$s(x) = \left| \mathcal{F}^{-1} \left\{ P(v) e^{i\phi(v)} \right\} \right|^2 \quad (2)$$

where \mathcal{F}^{-1} is Fourier transform; v are coordinates of the pupil plane; P is the pupil function; ϕ is the wave-front phase, which can be decomposed into a set of Zernike polynomials as

$$\phi(v) = \theta(v) + \sum_{m=4}^M \alpha_m Z_m(v) \quad (3)$$

where α_m is the m th coefficient of polynomials; Z_m is the m th base of Zernike polynomials; θ is the known fixed-defocus phase that can be described by

$$\theta(v) = \frac{2\pi z}{\lambda} \frac{(v_x^2 + v_y^2)}{8(F\#)^2} \quad (4)$$

where v_x and v_y are the normalized vectors in pupil plane; z is defocus length; λ is wavelength; $F\#$ is F number.

2.2. Evaluation function

The mathematical model of PD can be regarded as an adaptive filter. In the Gaussian noise model, the mean square deviation of object and multi-channel images can be used as likelihood function. In frequency domain, the evaluation function is

$$L(f, \{\alpha\}_t) = \frac{1}{2N} \sum_u \left(\sum_{t=1}^T \sum_{c=1}^C |D_{tc}(u) - F S_{tc}(u)|^2 + \gamma |F(u)|^2 \right) \quad (5)$$

where u is frequency domain coordinate; T is the number of frames; C is the number of channels, for example, in this paper we use two cameras, so $T=2$; N is the total number of pixels of the single image; α is the Zernike coefficient needing to be solved; \mathcal{F} is Fourier transform, $D_{tc} = \mathcal{F}(d_{tc})$, $F = \mathcal{F}(f)$, $S_{tc} = \mathcal{F}(s_{tc})$; the second part of the right bracket is Tikhonov regularization term [13,14], which can improve the stability and convergence rate of the algorithm; γ is regular non-negative coefficient.

According to maximum likelihood estimation, target estimation can be regarded as an independent intermediate process and is separated from phase estimation, so we can get the evaluation function unrelated to the target [11]. The expression of target estimation is an intermediate process of derivation of evaluation function. It has the same form as wiener filter and can reduce the effect of noise efficiently.

$$L(\{\alpha\}_t) = \frac{1}{2N} \sum_u \left(\sum_{t=1}^T \sum_{c=1}^C |D_{tc}|^2 - \frac{\left| \sum_{t=1}^T \sum_{c=1}^C D_{tc} S_{tc}^* \right|^2}{\gamma + \sum_{t=1}^T \sum_{c=1}^C |S_{tc}|^2} \right) \quad (6)$$

$$F = \frac{\sum_{t=1}^T \sum_{c=1}^C D_{tc} S_{tc}^*}{\gamma + \sum_{t=1}^T \sum_{c=1}^C |S_{tc}|^2} \quad (7)$$

When evaluation function is determined, the process of wave-front detection and image restoration can be described as a mathematical optimization problem. We use the L-BFGS-B algorithm [19–21] which is suitable for large optimization problems and write optimization software by C++ language. After a long-term test, we demonstrate that the algorithm has good convergence efficiency.

3. Experimental design

3.1. Experimental system components

We make the experiment on a 1.23 m telescope, and the system diagram is shown in Fig. 2. The whole optical path is in a metal box which is fixed on the telescope. In order to validate the ability of

Download English Version:

<https://daneshyari.com/en/article/845953>

Download Persian Version:

<https://daneshyari.com/article/845953>

[Daneshyari.com](https://daneshyari.com)