



Application note

SafeDriving: A mobile application for tractor rollover detection and emergency reporting

Bo Liu^a, A. Bulent Koc^{b,*}^a Department of Bioengineering, Division of Food Systems and Bioengineering, University of Missouri, Columbia, MO 65211-5200, United States^b Agricultural Systems Management, Division of Food Systems and Bioengineering, University of Missouri, Columbia, MO 65211-5200, United States

ARTICLE INFO

Article history:

Received 20 April 2013

Received in revised form 2 August 2013

Accepted 3 August 2013

Keywords:

Mobile electronic devices

Application

Tractor

Rollover

Emergency notification

ABSTRACT

This paper introduces a tractor rollover detection and emergency reporting software application, SafeDriving, developed for iOS-based mobile electronic devices (smartphones and tablet computers). The SafeDriving application uses a mathematical model to calculate the stability of a tractor using the physical parameters of the tractor and the data from the inbuilt sensors of the mobile electronic devices or the data from the external sensors attached to the tractor. When the SafeDriving application detects an accident, it sends automated email and phone messages with the GPS location, date, time and other critical information. The functions of the SafeDriving application were tested on a small-scale model tractor in laboratory conditions and on a 45 HP utility tractor in field conditions. The field-upset tests with the utility tractor were conducted for 10 times at 10.8 km/h and 21.6 km/h. During all of the tests, the application successfully monitored the vehicle stability and reported the accidents to the emergency contacts when a rollover accident happened.

© 2013 Elsevier B.V. All rights reserved.

1. Introduction

Tractor safety plays an important role in agricultural production (Springfeldt, 1996). Rollover accidents are the most severe and major safety problems for agricultural tractors. Tractor rollover accidents are responsible for approximately 50% of the fatal tractor crashes (HOSTA, 2004). Tractors are often operated on uneven terrains with varying slopes. Because all of the tractor rollover accidents can cause severe injuries to operators, Occupational Safety and Health Administration (OSHA) requires agricultural tractor manufacturers to install Roll Over Protective Structures (ROPS) since 1976 (OSHA, 2005). While the ROPS can reduce the severity of the rollover accidents to the operators, timely reporting of the accidents to rescue teams would minimize the impact of the accident to the operator. Mobile electronic devices being equipped with several sensors in addition to their internet, telephone and wireless communication capabilities (Wi-Fi and Bluetooth) are excellent tools for tracking, detection of rollovers and accident notification. iPhones and iPads are equipped with a 3-axis accelerometer, gyroscope, GPS sensor, digital compass, digital cameras and touch screens. We implemented the tractor rollover, detection, and emergency reporting application, SafeDriving, on iOS-based mobile electronic devices (Apple, Inc., Cupertino, CA).

2. SafeDriving smartphone/tablet application

The SafeDriving application was developed using the iOS software development kit, XCode (Apple, Inc., Cupertino, CA). The SafeDriving application has two working modes as shown in Fig. 1. In mode 1, the application uses the sensors and the Wi-Fi or 3G/4G network functions of the mobile electronic device to monitor the tractor stability, display warnings, detect accidents and transmit emergency messages when an accident occurs. Mode 1 requires the users to mount the mobile device on the tractor to monitor the stability of the vehicle. In mode 2, the SafeDriving application receives the data streamed from a microcontroller-based standalone/backup system via Bluetooth to monitor the tractor stability, display feedback messages (warnings), detect accidents and transmit emergency messages when an accident occurs. Mode 2 does not require the users to mount the mobile device on the tractor. The mobile device can be in the operator's pocket or anywhere within the Bluetooth communication range of the external backup sensors installed on the tractor.

The flowchart for the SafeDriving application algorithm is shown in Fig. 2. The SafeDriving application utilizes the physical parameters of the tractor and the data from the internal sensors of the mobile device or the external backup system to conduct the signal processing and implementation of the mathematical model. SafeDriving algorithm uses a vehicle rollover model to calculate a rollover stability index value using the data from the sensors and the vehicle's physical parameters. Stability index is a metric used to represent how stable the tractor operation is. The

* Corresponding author. Address: 1406 E. Rollins Street, 211 Agricultural Engineering Building, Columbia, MO 65211-5200, United States. Tel.: +1 573 8822495.

E-mail address: koca@missouri.edu (A.B. Koc).

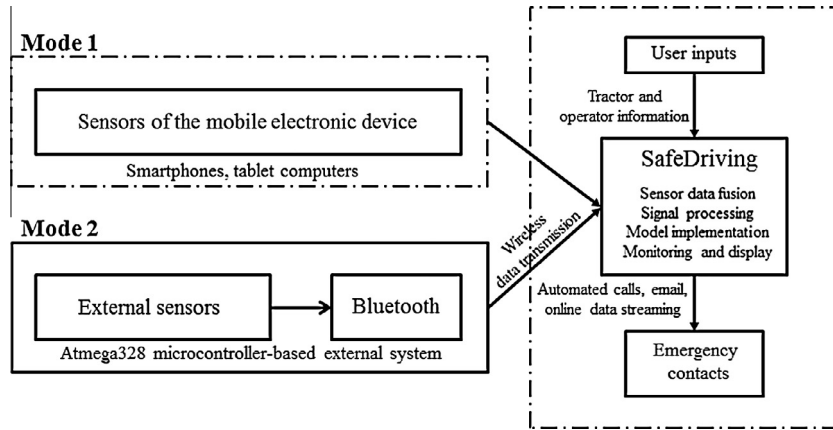


Fig. 1. Schematic diagram of the SafeDriving application.

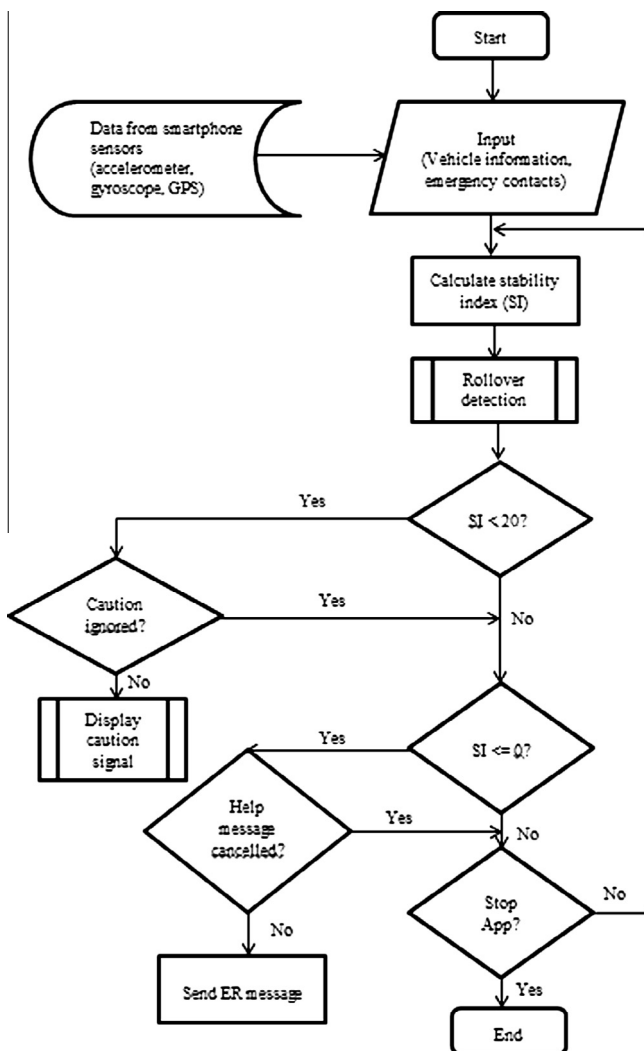


Fig. 2. Flowchart for the algorithm used in SafeDriving application.

$$SI_{overall}(t) = \left(1 - \sqrt{\left(\frac{\varphi}{\varphi_{cri}} \right)^2 + \left(\frac{\theta}{\theta_{cri}} \right)^2} \right) * \left[1 - \sqrt{\left(\frac{\dot{\varphi}}{\dot{\varphi}_{cri}} \right)^4 + \left(\frac{\dot{\theta}}{\dot{\theta}_{cri}} \right)^4} \right] \times 100 \quad (1)$$

where φ and θ are the roll angle and pitch angle of the vehicle and φ_{cri} and θ_{cri} are the critical roll angle and critical pitch angle, at which lateral or longitudinal overturning is about to happen; $\dot{\theta}$ is the pitch rate, $\dot{\theta}_{cri}$ is the critical pitch rate, $\dot{\varphi}$ is the actual roll rate, and $\dot{\varphi}_{cri}$ is the critical roll rate of the vehicle (Ertlmeier et al., 2012). The details of the derivation of the overall stability index value shown in Eq. (1) is provided in Koc and Liu (2013), Koc et al. (2012). When the stability index value drops below 20, a caution signal indicating “rollover hazard” appears on the phone screen. Stability index value of 0 indicates a rollover or accident condition. If an accident is detected (stability index = 0) and the operator did not stop the application, the SafeDriving application transmits an email message containing the date, time and GPS coordinates of the accident location automatically to the emergency contacts. An automated phone call is also made to the emergency contacts specified by the user. The GPS coordinates transmitted in the email message are from the GPS sensor of the smartphone. Most smartphones use assisted-GPS (A-GPS) to reduce the time for identifying locations. A-GPS uses the locations of the cell phone towers and Wi-Fi hotspot locations for this service. A-GPS increases the accuracy of the GPS coordinates and allows position estimations when GPS satellites are not visible to the cell phones. The emergency notification function of the application works only in areas where there is cell phone signal coverage.

The screenshots of the SafeDriving application are shown in Fig. 3. Fig. 3a shows the user data input interface. The user must fill the vehicle physical parameters, email addresses and the phone numbers of the emergency contacts. The stability status of the tractor is displayed in Fig. 3b. The stability index on the screen indicates how stable the tractor is being operated. A value of 100 indicates the most stable operation while a value of 0 indicates a rollover or accident condition. If the stability index value gets below a threshold (i.e. 20) indicating a high risk of rollover or overturning is approaching, a caution message is displayed to warn the operator (Fig. 3c). Because rollover accidents can happen in very short time, the caution message displayed to the operator may not provide enough reaction time to prevent an accident, however, this lead time would be long enough for triggering electromechanical intervention mechanisms used for automatically

deflections of tires and suspension of the vehicle, road conditions, and environmental factors were not considered in the model. However, the vehicle's lateral and longitudinal stabilities were used to calculate an overall stability index value. The overall stability index value is calculated by using the following equation:

Download English Version:

<https://daneshyari.com/en/article/84622>

Download Persian Version:

<https://daneshyari.com/article/84622>

[Daneshyari.com](https://daneshyari.com)