

Accepted Manuscript

Title: The effect of mechanical dry coating with magnesium stearate on flowability and compactibility of plastically deforming microcrystalline cellulose powders

Authors: Jaana Koskela, David A.V. Morton, Peter J. Stewart, Anne M. Juppo, Satu Lakio



PII: S0378-5173(17)31123-7
DOI: <https://doi.org/10.1016/j.ijpharm.2017.11.068>
Reference: IJP 17188

To appear in: *International Journal of Pharmaceutics*

Received date: 1-9-2017
Revised date: 28-11-2017
Accepted date: 29-11-2017

Please cite this article as: Koskela J, Morton DAV, Stewart PJ, Juppo AM, Lakio S, The effect of mechanical dry coating with magnesium stearate on flowability and compactibility of plastically deforming microcrystalline cellulose powders, *International Journal of Pharmaceutics* (2010), <https://doi.org/10.1016/j.ijpharm.2017.11.068>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

The effect of mechanical dry coating with magnesium stearate on flowability and compactibility of plastically deforming microcrystalline cellulose powders

Jaana Koskela^{1,*}, David A.V. Morton², Peter J. Stewart², Anne M. Juppo¹, Satu Lakio³


¹ Division of Pharmaceutical Chemistry and Technology, 00014 University of Helsinki, P.O. Box 56, Helsinki, Finland

² Drug Delivery Disposition and Dynamics, Monash Institute of Pharmaceutical sciences, Monash University, Parkville, Victoria 3055, Australia

³ Orion Pharma, Orionintie 1, 02200 Espoo, Finland

*e-mail: jaana.koskela@helsinki.fi, Division of Pharmaceutical Chemistry and Technology, 00014 University of Helsinki, P.O. Box 56, Helsinki, Finland, tel: +358 50 311 9306

Graphical abstract

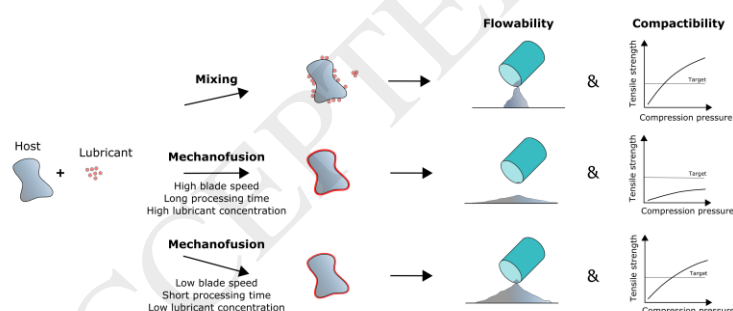

Abstract

Mechanofusion is a dry coating method that can be used to improve the flowability of cohesive powder by coating host particles with a lubricant, for example magnesium stearate (MgSt). It has been shown previously that fragmenting material can under some

Download English Version:

<https://daneshyari.com/en/article/8520332>

Download Persian Version:

<https://daneshyari.com/article/8520332>

[Daneshyari.com](https://daneshyari.com)