



King Saud University
Journal of the Saudi Society of Agricultural Sciences

www.ksu.edu.sa
www.sciencedirect.com



FULL LENGTH ARTICLE

Application of Interval Type-2 Fuzzy Logic to polypropylene business policy in a petrochemical plant in India

Dipak Kumar Jana^{a,*}, Oscar Castillo^b, Sutapa Pramanik^c, Manoranjan Maiti^c

^a Department of Engineering Science, Haldia Institute of Technology, Haldia, Purba Midnapur 721 657, West Bengal, India

^b Tijuana Institute of Technology, Tijuana, Mexico

^c Department of Applied Mathematics with Oceanology and Computer Programming, Vidyasagar University, Midnapore, West Bengal 721 102, India

Received 22 September 2015; accepted 28 December 2015

KEYWORDS

Polypropylene;
Product quality;
Fuzzy inference system;
Interval Type-2 Fuzzy Logic;
Fuzzy C-Means Clustering

Abstract This paper presents a new approach to predict the quality of polypropylene in petrochemical plants. The proposed approach constructs four different models, based on a large number of data collected from a renowned petrochemical plant in India and uses it to predict the polypropylene quality. The quality of polypropylene depends on the indices such as melt flow index and the xylene solubility of the product and the parameters controlling these two indices are hydrogen flow, donor flow, pressure and temperature of polymerization reactors. Mamdani Interval Type-2 Fuzzy Logic inference systems are formed for first time. The model outcomes are compared with the collected plant data and a sequence of sensitivity analysis elects the most suitable model from them. Some sensitivity analyses are provided using Fuzzy C-Means Clustering to the models.

© 2015 The Authors. Production and hosting by Elsevier B.V. on behalf of King Saud University. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

1. Introduction

Polypropylene is a versatile thermoplastic resin available in a wide range of formulations for engineering applications. Polypropylene (commonly called just PP) is a type of thermoplastic polymer resin. The chemical designation is $(-C_3H_6-)_n$. It is used both in industry and in consumer goods; it can be used both as a structural plastic and as a fiber as well. The structural plastic is often used for food containers, particularly those that need to be microwave safe and dishwasher safe. The melting point of polypropylene is very high compared to many other plastics, at 320 °F (160 °C). Polypropylene is also very easy to add dyes to and it is often used as a fiber in carpet

* Corresponding author. Tel.: +91 9474056163; fax: +91 3224 252800.

E-mail addresses: dipakjana@gmail.com (D.K. Jana), ocastillo@tectijuana.mx (O. Castillo), sutapaparamanik12@gmail.com (S. Pramanik), mmaiti2005@yahoo.co.in (M. Maiti).

Peer review under responsibility of King Saud University.





Figure 1 House ware sector application: PP.



Figure 3 Cast film application: PP.

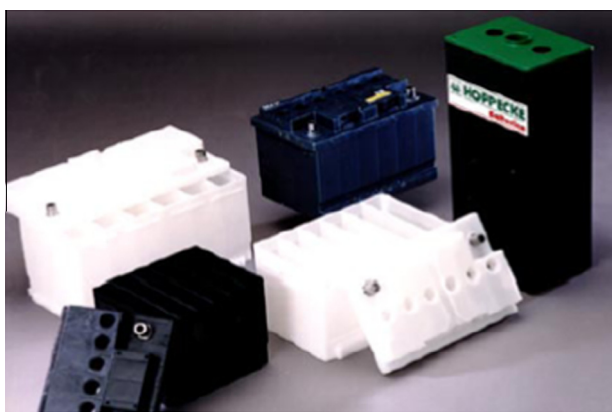


Figure 2 Battery sector application: PP.



Figure 4 Material development application: PP.

35 manufacturing that needs to be rugged and durable. Other
 36 benefits of PP are that it does not absorb water like other plas-
 37 tics, it does not deteriorate in the presence of bacteria, mold or
 38 other elements, and it is lightweight and very flexible. Rapid
 39 growth of PP as a novel material, touching all conceivable
 40 application areas and excelling in most of them, has helped
 41 industries in most sectors (including petrochemicals, electrical
 42 and electronics, consumer durables, packaging, storage, gasket
 43 and sealants, material handling and conveying, transportation
 44 and communication, furniture, footwear, personal care and
 45 health care, sports and entertainment) grow at a rapid pace.
 46 The global demand for polypropylene jumped from 6.4 million
 47 metric tons in 1983 to 38.6 million metric tons in 2004, with a
 48 growing rate as high as 5.8% from 2004 to 2009. Recently the
 49 world annual polypropylene production has increased from
 50 52 million metric tons in 2008 to 69.1 million metric tons in
 51 2013 and forecasts an annual increase on polypropylene global
 52 demand by 3.7% in the 2010–2014 time frame (Alshaiban,
 53 2011). One can therefore expect a very booming market and
 54 bright future market for PP. All real-life applications of PP
 55 are shown in Figs. 1–4. The history of PP began in 1954 when a
 56 German chemist named Karl Rehn and an Italian chemist
 57 named Giulio Natta first polymerized it (Martin, 1954). This
 58 led to a large commercial production of the product that began
 59 just three years later (Sailors and Hogan, 1981). In last
 60 60 years, the uses of PP have expanded rapidly in every aspect
 61 of life because of its versatility and affordability. The mean

consumption rate of PP was about 10% per year in the recent
 past, and in application field this value is however way higher
 (Karger Kocsis, 1995). Depending on the end-users demand 3
 types of polypropylene are produced (i) homopolymer, (ii)
 impact copolymer and (iii) random copolymer. Each type of
 polymer is produced in 4 different grades (3.5 MFI, 7 MFI,
 10 MFI and 36 MFI) and these grades determine the quality
 of a polymer.

Application of polypropylene is based on its quality, which
 is controlled by its properties, such as melt flow index (MFI)
 and xylene solubility. To determine the quality of PP we, in
 this paper, have tried to form a mathematical model. The qual-
 ity of the polymer depends on the products that are used to
 synthesize it (considered to be the input variables) and the
 characteristics of the final polymer (considered as the output
 variables). In classical logic approach an exact definition of
 mathematical model equations is needed to formulate a phys-
 ical model and this approach requires an exact definition of
 the mathematical model equations to describe the phenomenon
 (Naderloo et al., 2012). But in practical field where the poly-
 mer is produced no such exact definitions have been followed
 and the variables take only linguistic values rather than some
 crisp values. One of the best methods to make a mathematical
 model from it, is to apply fuzzy logic approach just like how
 (Zhou et al., 2014) applied fuzzy programming to create an
 integrated model for sustainable municipal energy system

Download English Version:

<https://daneshyari.com/en/article/8876346>

Download Persian Version:

<https://daneshyari.com/article/8876346>

[Daneshyari.com](https://daneshyari.com)