

Accepted Manuscript

Spatial resolutions in areal rainfall estimation and their impact on hydrological simulations of a lowland catchment


Wilco Terink, Hidde Leijnse, Gé van den Eertwegh, Remko Uijlenhoet

PII: S0022-1694(18)30372-X

DOI: <https://doi.org/10.1016/j.jhydrol.2018.05.045>

Reference: HYDROL 22822

To appear in: *Journal of Hydrology*

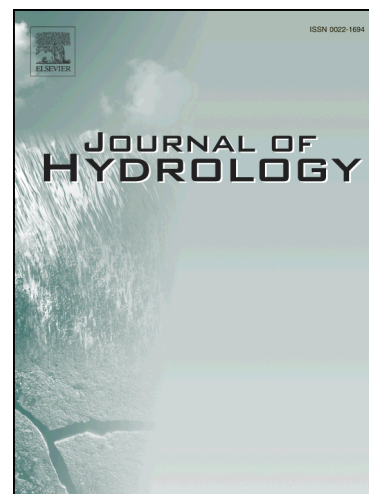

Please cite this article as: Terink, W., Leijnse, H., van den Eertwegh, G., Uijlenhoet, R., Spatial resolutions in areal rainfall estimation and their impact on hydrological simulations of a lowland catchment, *Journal of Hydrology* (2018), doi: <https://doi.org/10.1016/j.jhydrol.2018.05.045>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

Spatial resolutions in areal rainfall estimation and their impact on hydrological simulations of a lowland catchment

Wilco Terink^{a,*}, Hidde Leijnse^b, Gé van den Eertwegh^c, Remko Uijlenhoet^d

^aEnvironment Canterbury Regional Council, 200 Tuam Street, PO Box 345, Christchurch, New Zealand.

^bRoyal Netherlands Meteorological Institute (KNMI), Utrechtseweg 297, 3731 GA De Bilt, The Netherlands.

^cKnowH2O, Watertorenweg 12, 6571 CB Berg en Dal, The Netherlands.

^dHydrology and Quantitative Water Management Group, Wageningen University, Droevendaalsesteeg 4, 6708 PB Wageningen, The Netherlands.

Abstract

Many studies suggest that high-density rain gauge networks are required to capture the rainfall heterogeneities necessary to accurately describe the components of the hydrological cycle. However, equipping and maintaining a high-density rain gauge network will also involve high costs. Although many studies provided useful insights on the required accuracy of rainfall estimates to accurately describe the components of the hydrological cycle, most of these studies focused on streamflow simulations, large river basins or urban environments. The objective of this study is therefore to evaluate the impact of uncertainties in areal rainfall, estimated at several spatial resolutions, on hydrological simulations of a small $\sim 6.5 \text{ km}^2$ rural lowland catchment. The approach followed in this study is to force a calibrated spatially-distributed hydrological model (SPHY) with rainfall retrieved from an X-band radar and various synthetic rainfall products, calculated using bootstrap samples of a varying number of radar pixels, treated as virtual rain gauge locations within the catchment. This enables us to determine the most appropriate resolution of rainfall data to accurately describe the hydrology of a small rural lowland catchment. We found that the use of one rain gauge to estimate the catchment's areal rainfall may lead to a potential error of more than six times the average hourly rainfall. This may lead to uncertainties in simulated discharge that approach 60% of the average hourly discharge. More than 40 rain gauges are required to reduce the potential error in areal rainfall estimation to values $< 0.1 \text{ mm h}^{-1}$. The associated uncertainty in discharge simulations is 20% if 10 rain gauges are used, and 10% if 40 rain gauges are used. The simulation of soil moisture contents and evapotranspiration rates are hardly affected by the number of rain gauges used to estimate the areal rainfall, which is due to the high saturated hydraulic conductivities of the top-soil. At least 12 gauges per km^2 are required to capture the spatial rainfall variation that is present in radar rainfall estimates. Analysis of an individual 18-hour rainfall event revealed that the uncertainty in peak areal rainfall estimated using one rain gauge may range between -100% and 600%. The associated uncertainty in simulated discharge for this event ranges between -67 and 233%. With 25 rain gauges the uncertainty in simulated discharge is still in the range of -17 to 33%.

Keywords: X-band radar, SPHY, spatial resolutions, hydrological simulations, uncertainty, Hupsel Brook catchment

Download English Version:

<https://daneshyari.com/en/article/8894570>

Download Persian Version:

<https://daneshyari.com/article/8894570>

[Daneshyari.com](https://daneshyari.com)