


Swarm Intelligence and Evolutionary Algorithms: performance versus speed

Adam P. Piotrowski , Maciej J. Napiorkowski ,
Jaroslaw J. Napiorkowski , Pawel M. Rowinski

PII: S0020-0255(16)32090-4
DOI: [10.1016/j.ins.2016.12.028](https://doi.org/10.1016/j.ins.2016.12.028)
Reference: INS 12663

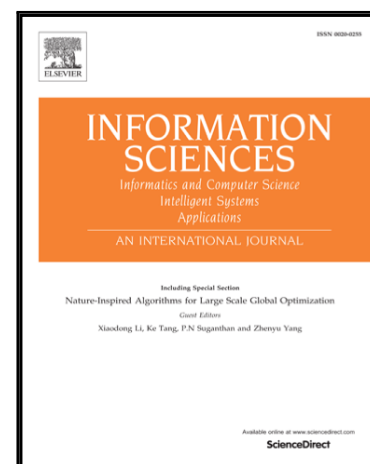

To appear in: *Information Sciences*

Received date: 22 April 2016
Revised date: 14 December 2016

Please cite this article as: Adam P. Piotrowski , Maciej J. Napiorkowski , Jaroslaw J. Napiorkowski , Pawel M. Rowinski , Swarm Intelligence and Evolutionary Algorithms: performance versus speed, *Information Sciences* (2016), doi: [10.1016/j.ins.2016.12.028](https://doi.org/10.1016/j.ins.2016.12.028)

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

Swarm Intelligence and Evolutionary Algorithms: performance versus speed

Adam P. Piotrowski¹, Maciej J. Napiorkowski², Jaroslaw J. Napiorkowski¹, Pawel M. Rowinski¹

1. Institute of Geophysics, Polish Academy of Sciences, Ks. Janusza 64, 01-452 Warsaw, Poland

+48-22-6915-858 FAX +48-22-6915-915 adampp@igf.edu.pl jnn@igf.edu.pl

2. Faculty of Building Services, Hydro and Environmental Engineering, Warsaw University of Technology, Nowowiejska 20, 00-653 Warsaw, Poland maciejnap@gmail.com

ABSTRACT:

The popularity of metaheuristics, especially Swarm Intelligence and Evolutionary Algorithms, has increased rapidly over the last two decades. Numerous algorithms are proposed each year, and progressively more novel applications are being found. However, different metaheuristics are often compared by their performance on problems with an arbitrarily fixed number of allowed function calls. There are surprisingly few papers that explore the relationship between the relative performance of numerous metaheuristics on versatile numerical real-world problems and the number of allowed function calls.

In this study the performance of 33 various metaheuristics proposed between 1960 and 2016 have been tested on 22 numerical real-world problems from different fields of science, with the maximum number of function calls varying between 5000 and 500,000. It is confirmed that the algorithms that succeed in comparisons when the computational budget is low are among the poorest performers when the computational budget is high, and vice versa. Among the tested variants, Particle Swarm Optimization algorithms and some new types of metaheuristics perform relatively better when the number of allowed function calls is low, whereas Differential Evolution and Genetic Algorithms perform better relative to other algorithms when the computational budget is large. It is difficult to find any metaheuristic that would perform adequately over all of the numbers of function calls tested. It was also found that some algorithms may become completely unreliable on specific real-world problems, even though they perform reasonably on others.

Keywords:

Convergence speed, Genetic Algorithm, Differential Evolution, Particle Swarm Optimization, Biogeography-based Optimization, Direct Search method.

1. Introduction

Download English Version:

<https://daneshyari.com/en/article/4944623>

Download Persian Version:

<https://daneshyari.com/article/4944623>

[Daneshyari.com](https://daneshyari.com)