

# Accepted Manuscript

A Spiking Network that Learns to Extract Spike Signatures from Speech Signals


Amirhossein Tavanaei, Anthony S. Maida

PII: S0925-2312(17)30311-9  
DOI: [10.1016/j.neucom.2017.01.088](https://doi.org/10.1016/j.neucom.2017.01.088)  
Reference: NEUCOM 18107

To appear in: *Neurocomputing*

Received date: 7 November 2015  
Revised date: 9 October 2016  
Accepted date: 20 January 2017

Please cite this article as: Amirhossein Tavanaei, Anthony S. Maida, A Spiking Network that Learns to Extract Spike Signatures from Speech Signals, *Neurocomputing* (2017), doi: [10.1016/j.neucom.2017.01.088](https://doi.org/10.1016/j.neucom.2017.01.088)

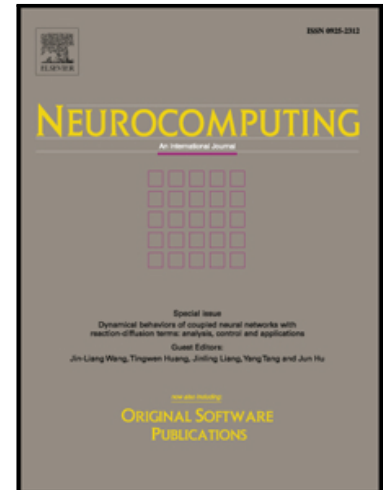

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

# A Spiking Network that Learns to Extract Spike Signatures from Speech Signals

Amirhossein Tavanaei, Anthony S. Maida

*The Center for Advanced Computer Studies, University of Louisiana at Lafayette, 301 E. Lewis,  
Lafayette, Louisiana 70503, USA*

---

## Abstract

Spiking neural networks (SNNs) with adaptive synapses reflect core properties of biological neural networks. Speech recognition, as an application involving audio coding and dynamic learning, provides a good test problem to study SNN functionality. We present a simple, novel, and efficient nonrecurrent SNN that learns to convert a speech signal into a spike train signature. The signature is distinguishable from signatures for other speech signals representing different words, thereby enabling digit recognition and discrimination in devices that use only spiking neurons. The method uses a small, nonrecurrent SNN consisting of Izhikevich neurons equipped with spike timing dependent plasticity (STDP) and biologically realistic synapses. This approach introduces an efficient and fast network without error-feedback training, although it does require supervised training. The new simulation results produce discriminative spike train patterns for spoken digits in which highly correlated spike trains belong to the same category and low correlated patterns belong to different categories. The proposed SNN is evaluated using a spoken digit recognition task where a subset of the Aurora speech dataset is used. The experimental results show that the network performs well in terms of accuracy rate and complexity.

*Keywords:* Spiking neural networks, STDP, speech recognition, neural model, spike signatures, speech signal coding.

---

*Email address:* [tavanaei@louisiana.edu](mailto:tavanaei@louisiana.edu) (Amirhossein Tavanaei)

Download English Version:

<https://daneshyari.com/en/article/4947594>

Download Persian Version:

<https://daneshyari.com/article/4947594>

[Daneshyari.com](https://daneshyari.com)