


Accepted Manuscript

Game Theoretic Path Selection to Support Security in
Device-to-Device Communications

Emmanouil Panaousis, Eirini Karapistoli, Hadeer Elsemary,
Tansu Alpcan, MHR Khuzani, Anastasios A. Economides

PII: S1570-8705(16)30310-9
DOI: [10.1016/j.adhoc.2016.11.008](https://doi.org/10.1016/j.adhoc.2016.11.008)
Reference: ADHOC 1489

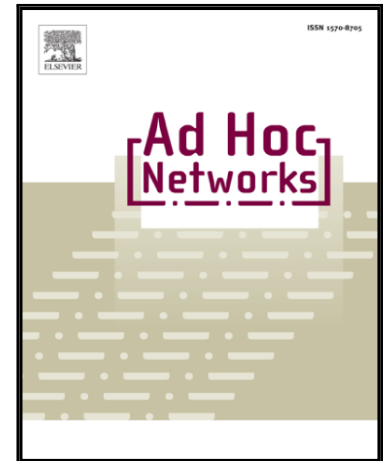

To appear in: *Ad Hoc Networks*

Received date: 10 May 2016
Revised date: 16 November 2016
Accepted date: 17 November 2016

Please cite this article as: Emmanouil Panaousis, Eirini Karapistoli, Hadeer Elsemary, Tansu Alpcan, MHR Khuzani, Anastasios A. Economides, Game Theoretic Path Selection to Support Security in Device-to-Device Communications, *Ad Hoc Networks* (2016), doi: [10.1016/j.adhoc.2016.11.008](https://doi.org/10.1016/j.adhoc.2016.11.008)

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

Game Theoretic Path Selection to Support Security in Device-to-Device Communications

Emmanouil Panaousis^a, Eirini Karapistoli^b, Hadeer Elsemary^c, Tansu Alpcan^d, MHR Khuzani^e, Anastasios A. Economides^f

Corresponding author: Eirini Karapistoli (irene@capritech.co.uk)

^aUniversity of Brighton, UK

^bCapritech Limited, UK

^cUniversity of Gottingen, Germany

^dUniversity of Melbourne, Australia

^eQueen Mary University of London, UK

^fUniversity of Macedonia, Greece

Abstract

Device-to-Device (D2D) communication is expected to be a key feature supported by 5G networks, especially due to the proliferation of Mobile Edge Computing (MEC), which has a prominent role in reducing network stress by shifting computational tasks from the Internet to the mobile edge. Apart from being part of MEC, D2D can extend cellular coverage allowing users to communicate directly when telecommunication infrastructure is highly congested or absent. This significant departure from the typical cellular paradigm imposes the need for decentralised network routing protocols. Moreover, enhanced capabilities of mobile devices and D2D networking will likely result in proliferation of new malware types and epidemics. Although the literature is rich in terms of D2D routing protocols that enhance quality-of-service and energy consumption, they provide only basic security support, e.g., in the form of encryption. Routing decisions can, however, contribute to collaborative detection of mobile malware by leveraging different kinds of anti-malware soft-

Download English Version:

<https://daneshyari.com/en/article/4953703>

Download Persian Version:

<https://daneshyari.com/article/4953703>

[Daneshyari.com](https://daneshyari.com)