

Accepted Manuscript

Fundamental properties of attack relations in structured argumentation with priorities

Phan Minh Dung, Phan Minh Thang


PII: S0004-3702(17)30127-3
DOI: <https://doi.org/10.1016/j.artint.2017.11.002>
Reference: ARTINT 3040

To appear in: *Artificial Intelligence*

Received date: 16 November 2016
Revised date: 23 October 2017
Accepted date: 1 November 2017

Please cite this article in press as: P.M. Dung, P.M. Thang, Fundamental properties of attack relations in structured argumentation with priorities, *Artif. Intell.* (2017), <https://doi.org/10.1016/j.artint.2017.11.002>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

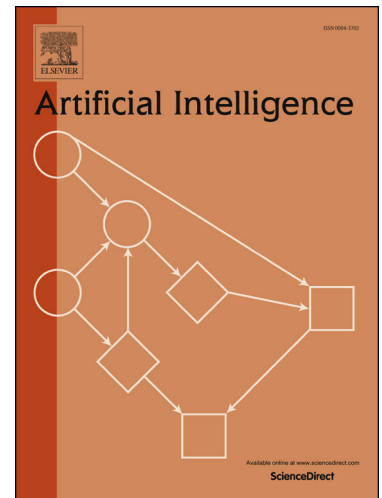

Fundamental Properties of Attack Relations in Structured Argumentation with Priorities

Phan Minh Dung¹
Phan Minh Thang²

¹Department of Computer Science, Asian Institute of Technology, Thailand

²Burapha University International College, Thailand

Abstract.¹

Due to a proliferation and diversity of approaches to structured argumentation with prioritized rules, several simple and intuitive principles for characterization and evaluation of the proposed attack relations have recently been introduced in [23]. While the proposed principles and properties are helpful, they do not identify unique attack relations. Any user of structured argumentation still faces a fundamental problem of determining an appropriate attack relation for her/his application and further principles that could help in identifying such attack relation.

We argue that a key purpose of introducing priorities between defeasible rules is to remove undesired attacks while keeping the set of removed attacks to a minimum. This intuitive idea could be viewed as a kind of minimal-removal-principle. We show in this paper that the minimal-removal-principle together with a new simple and intuitive property of inconsistency-resolving and previously proposed properties indeed characterize a unique attack relation referred to as the canonical attack relation. We show that canonical attack relations could be characterized in three distinct ways, as the supremum of a complete upper-semilattice of regular attack relations, or by removing the undesired attacks from the basic attack relations where the undesired attacks are captured by a least-fixed point of an intuitive removal function, or as the normal attack relations introduced in an earlier paper for a class of well-prioritized knowledge bases.

We start our study with a language consisting only of literals and two type of attacks, rebut and undercut. We then show that our approach can easily be scaled up by showing that all key results still hold for general underlying logical languages and the inclusion of assumptions.

We apply our proposed approach to valued-based argumentation and show that it also leads to the canonical semantics.

Keywords: Structured argumentation, priorities, regular and canonical attack relations, attack removal functions, well-prioritized rule-based systems.

¹ We thank anonymous reviewer 1 for suggesting the title of this paper that is more appropriate than our own naming effort.

Download English Version:

<https://daneshyari.com/en/article/6853067>

Download Persian Version:

<https://daneshyari.com/article/6853067>

[Daneshyari.com](https://daneshyari.com)